



STEVENS

www.facebook.com/stevensaudio

MB-10



MB10 10" Midbass

Specifications

Nominal Diameter	10"
Nominal Impedance	2Ω or 4Ω
Power Handling	300W EIA 426A
Peak Power	1200W EIA 426A
Sensitivity(1w/1m)	95.5dB
Usable Frequency Range	50Hz - 3KHz
Voice Coil Diameter	61mm
Voice Coil winding height	19mm
Voice Coil gap height	8mm

T/S Parameters	2 ohm	4 ohm
FS Hz	47 Hz	47 Hz
RE Ohms	1.57 Ω	3.1 Ω
Qms	8.8	6.4
Qes	0.22	0.25
Qts	0.21	0.24
Vas Ltr	52.8	51.5
CMS mm/n	0.328	0.303
BL T/m	8.54	11.6
MMS grms	33	32
XMAX mm 1 way HVC-HAG /2	5.5	5.5
Le 10Khz	0.251 mH	0.426 mH

Construction

Coil Former	Glass Fiber
Voice Coil Material	CCAW
Surround /Edge Termination	Polyvinyl Damped Multi Roll. Linen
Basket	Die Cast Aluminium
Magnet Material	Ferrite
Connectors	Spring Terminals

Mounting / Shipping

Overall Diameter	10.2"/260 mm
Mounting Depth	4.4 " / 112 mm
Weight	11 Lb / 5 kg
Shipping Weight	11.7 Lb / 5.3 kg
Packing Carton Dimensions	28*28*15cm
Mounting Hole Dimensions and Qty	8* 6.5mm on 247mm PCD






STEVENS

www.facebook.com/stevensaudio

MB-10

SPL vs Freq

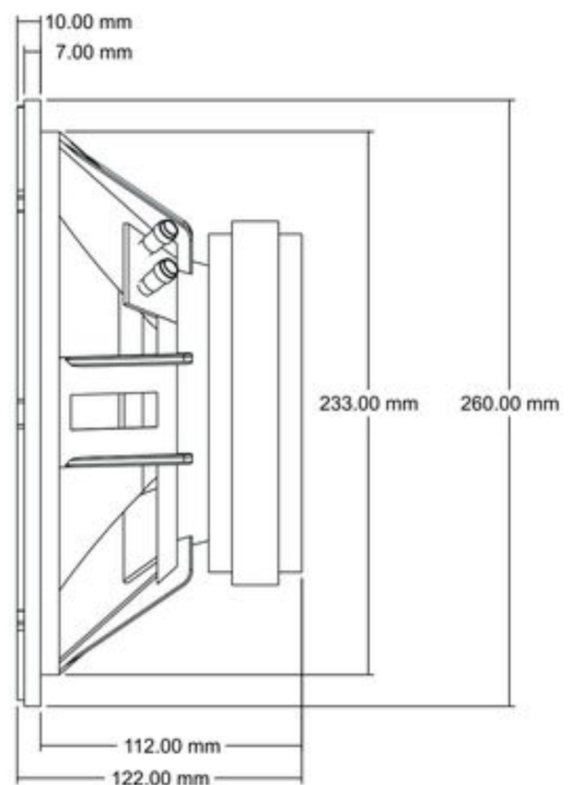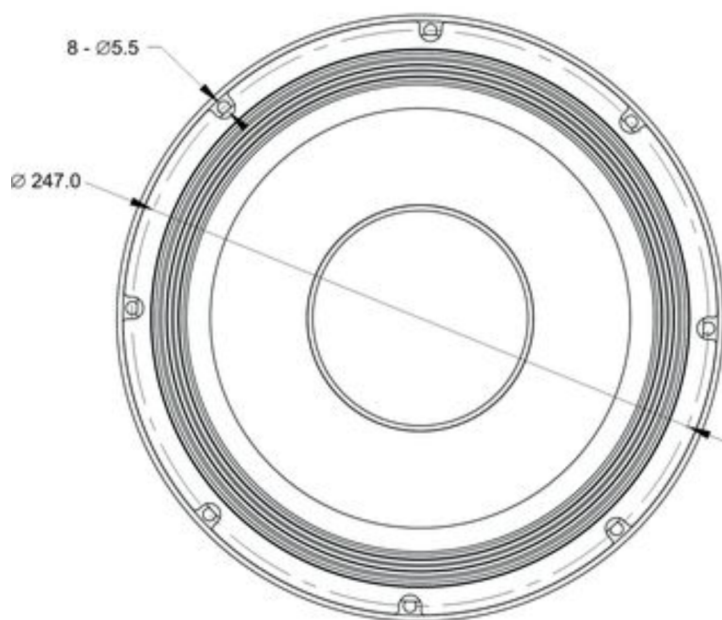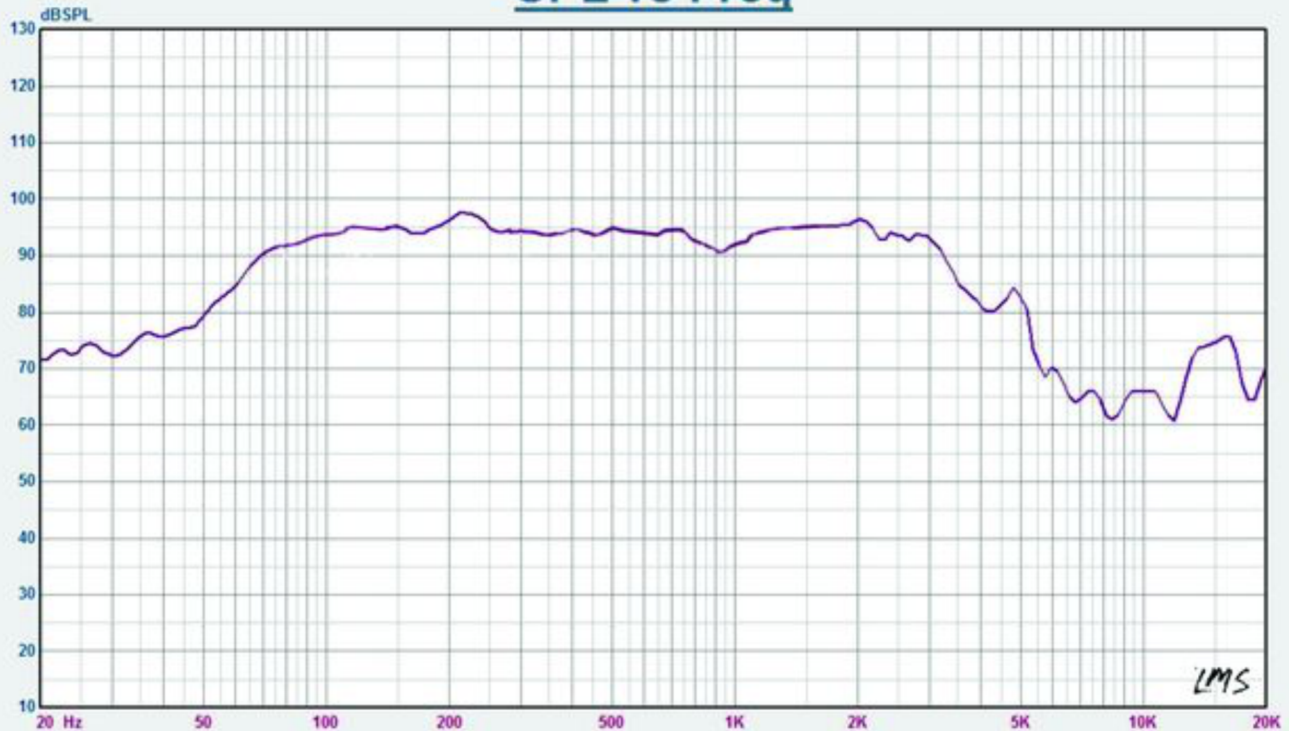

STEVENS AUDIO eric@stevens.audio