


# METALCORP

Everything in Steel

The Rural Brand for the Land

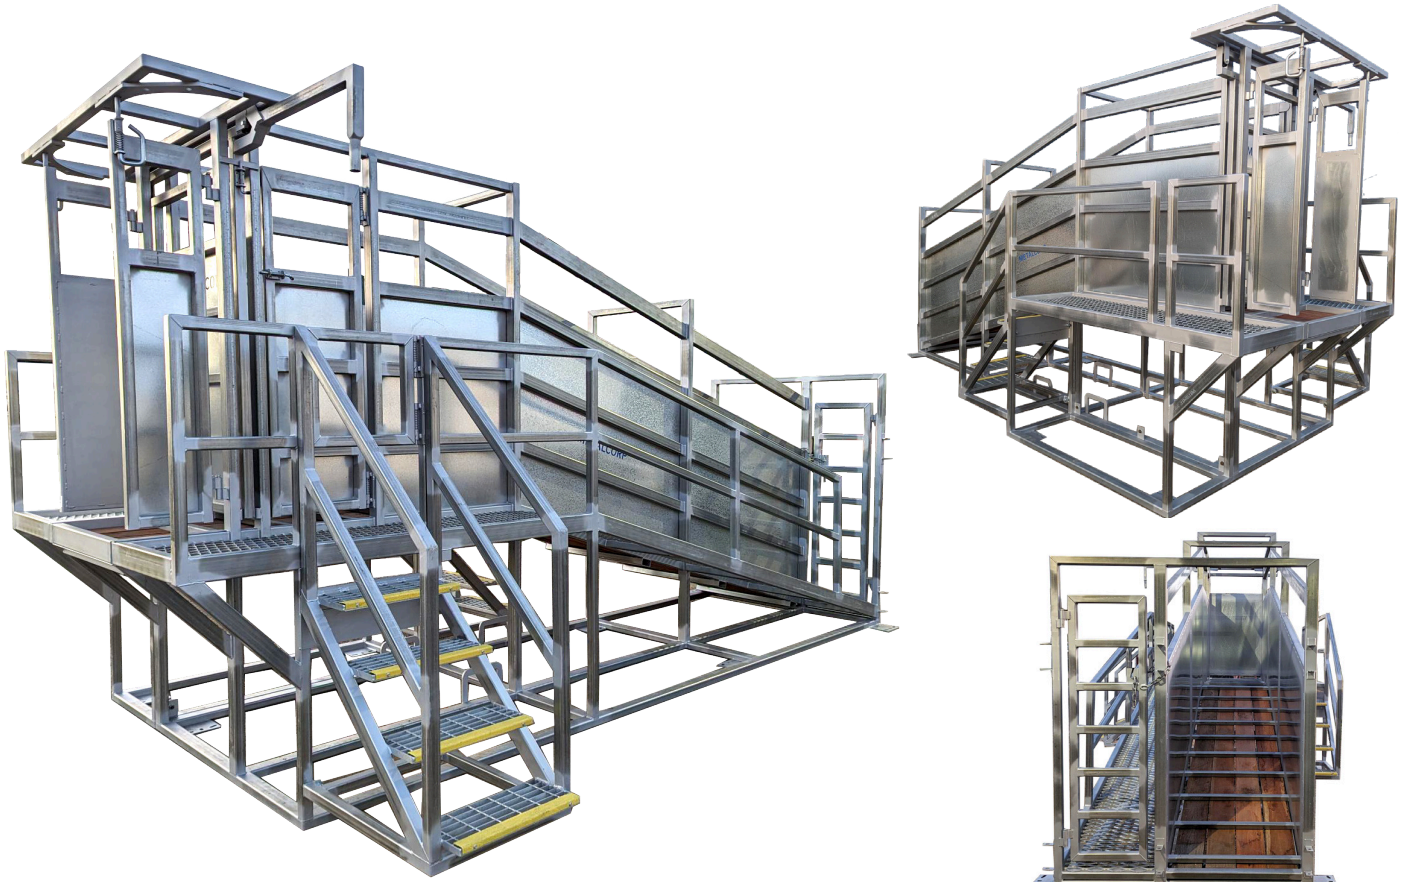

## CATTLEKING® DUAL SIDED LOAD RAMP

### Features:

- Fully welded with mitred corners – this means no caps on top of posts or plastic plugs inserted in the ends of tubular sections.
- Full base covering the entire ramp footprint which is great if the ground isn't 100% level, this will ensure no welds crack and the ramp holds up for many years of use.
- Locally sourced and milled (50mm) thick Ironbark floor boards.
- Internal width is 850mm, perfectly suited to stud cattle or any larger breeds.
- Full length walkway with handrail down the nearside with access stairway.
- One way self-closing access gate at the top of the stairs for safety.
- One way self-closing access gate into the ramp at the slide gate.
- Manway access gate (to provide access to the walkway directly from the yards).
- Robust sheeted slide gate incorporated just behind the batwing doors – this slide gate slides out the offside so the walkway is always clear.
- High sheeted sides.
- Australian Steel.
- Quality Australian made small components (hinges, slam latches and cleats).
- Base is made from 4mm material.
- Everything above the base is made from 3mm material.
- Sheeting is 2mm material.
- Offside stair/platform fitted as depicted above, this component is removed for transport purposes.

### Size:

- Base Width – 1625mm (plus stairs).
- Base Length 5800mm.
- Height 3100mm.
- Ramp Angle 16.9°.
- Weight 1.81TN.

SKU: 249034 (Ramp) & 249035 (optional Offside Stair/Platform)

SEE OUR FULL LIST OF METALCORP PRODUCTS BY VISITING OUR WEBSITE

[metalcorp.com.au](http://metalcorp.com.au)

### WIDE BRANCH NETWORK

Metalcorp has branches in New South Wales, Queensland, Victoria, South Australia and Western Australia. Our experienced teams are dedicated to delivering excellence in:

- Customer Service.
- Materials Handling.
- Technical Expertise.
- Express Pick-Up & Delivery Service.



CALL US NOW TO FIND OUT MORE

1300 306 204