

Vertical / Horizontal Wind Turbine




Powered with The Power Of Attraction™ HPAC-22 Ultra
High efficiency Permanent Magnet Alternator

General specifications:

Patented Wind Turbine Technology

| Specifications | MEI | Notes |
|------------------------------|-----------------------------|---------------------------|
| Rotor magnetically suspended | No friction, Guide bearings | Superior Efficiency |
| Output | 1, 2, 4, 8 kW | Superior |
| Wind speed – self starting | 6-28 mph | Max 135 mph |
| Optimal temp range | 0F – 140F | Temperature tolerant |
| Standard battery capacity | 40 amphr @ 24/48 VDC | Optional no- wind standby |
| High/ Low voltage protection | Load dump included | Lightning or overspeed |
| Battery weight | 45 lbs. | Li-Ion, AGM, optional |
| System weight | 235-375 lbs. | Less than competitors |
| Weatherproof | Sealed | Base Waterproof |
| Omni-directional wind | No restrictions | No directional vanes |
| Maintenance | Minimal | Battery and Bearings only |
| Output inverted | DC/AC/110/220 VAC GFCI | Included |
| Mount anywhere | Ground/tower/pedestal | Silent |

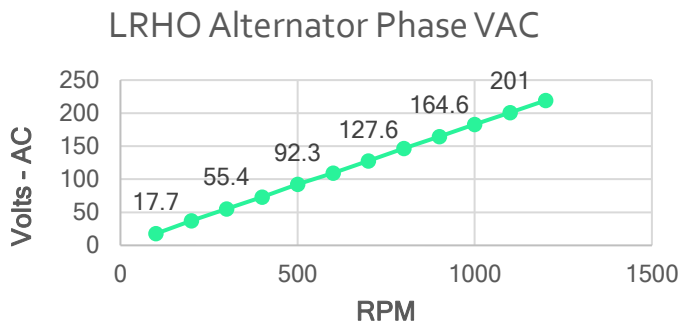

Optional Marine coating for
saltwater environments

Made in USA



Please Contact For more information

Sales@maglev-energy.com

(727) 342-7373

Maglev Energy Inc.

10550 72nd St Ste 507, Seminole, FL, United States, Florida