


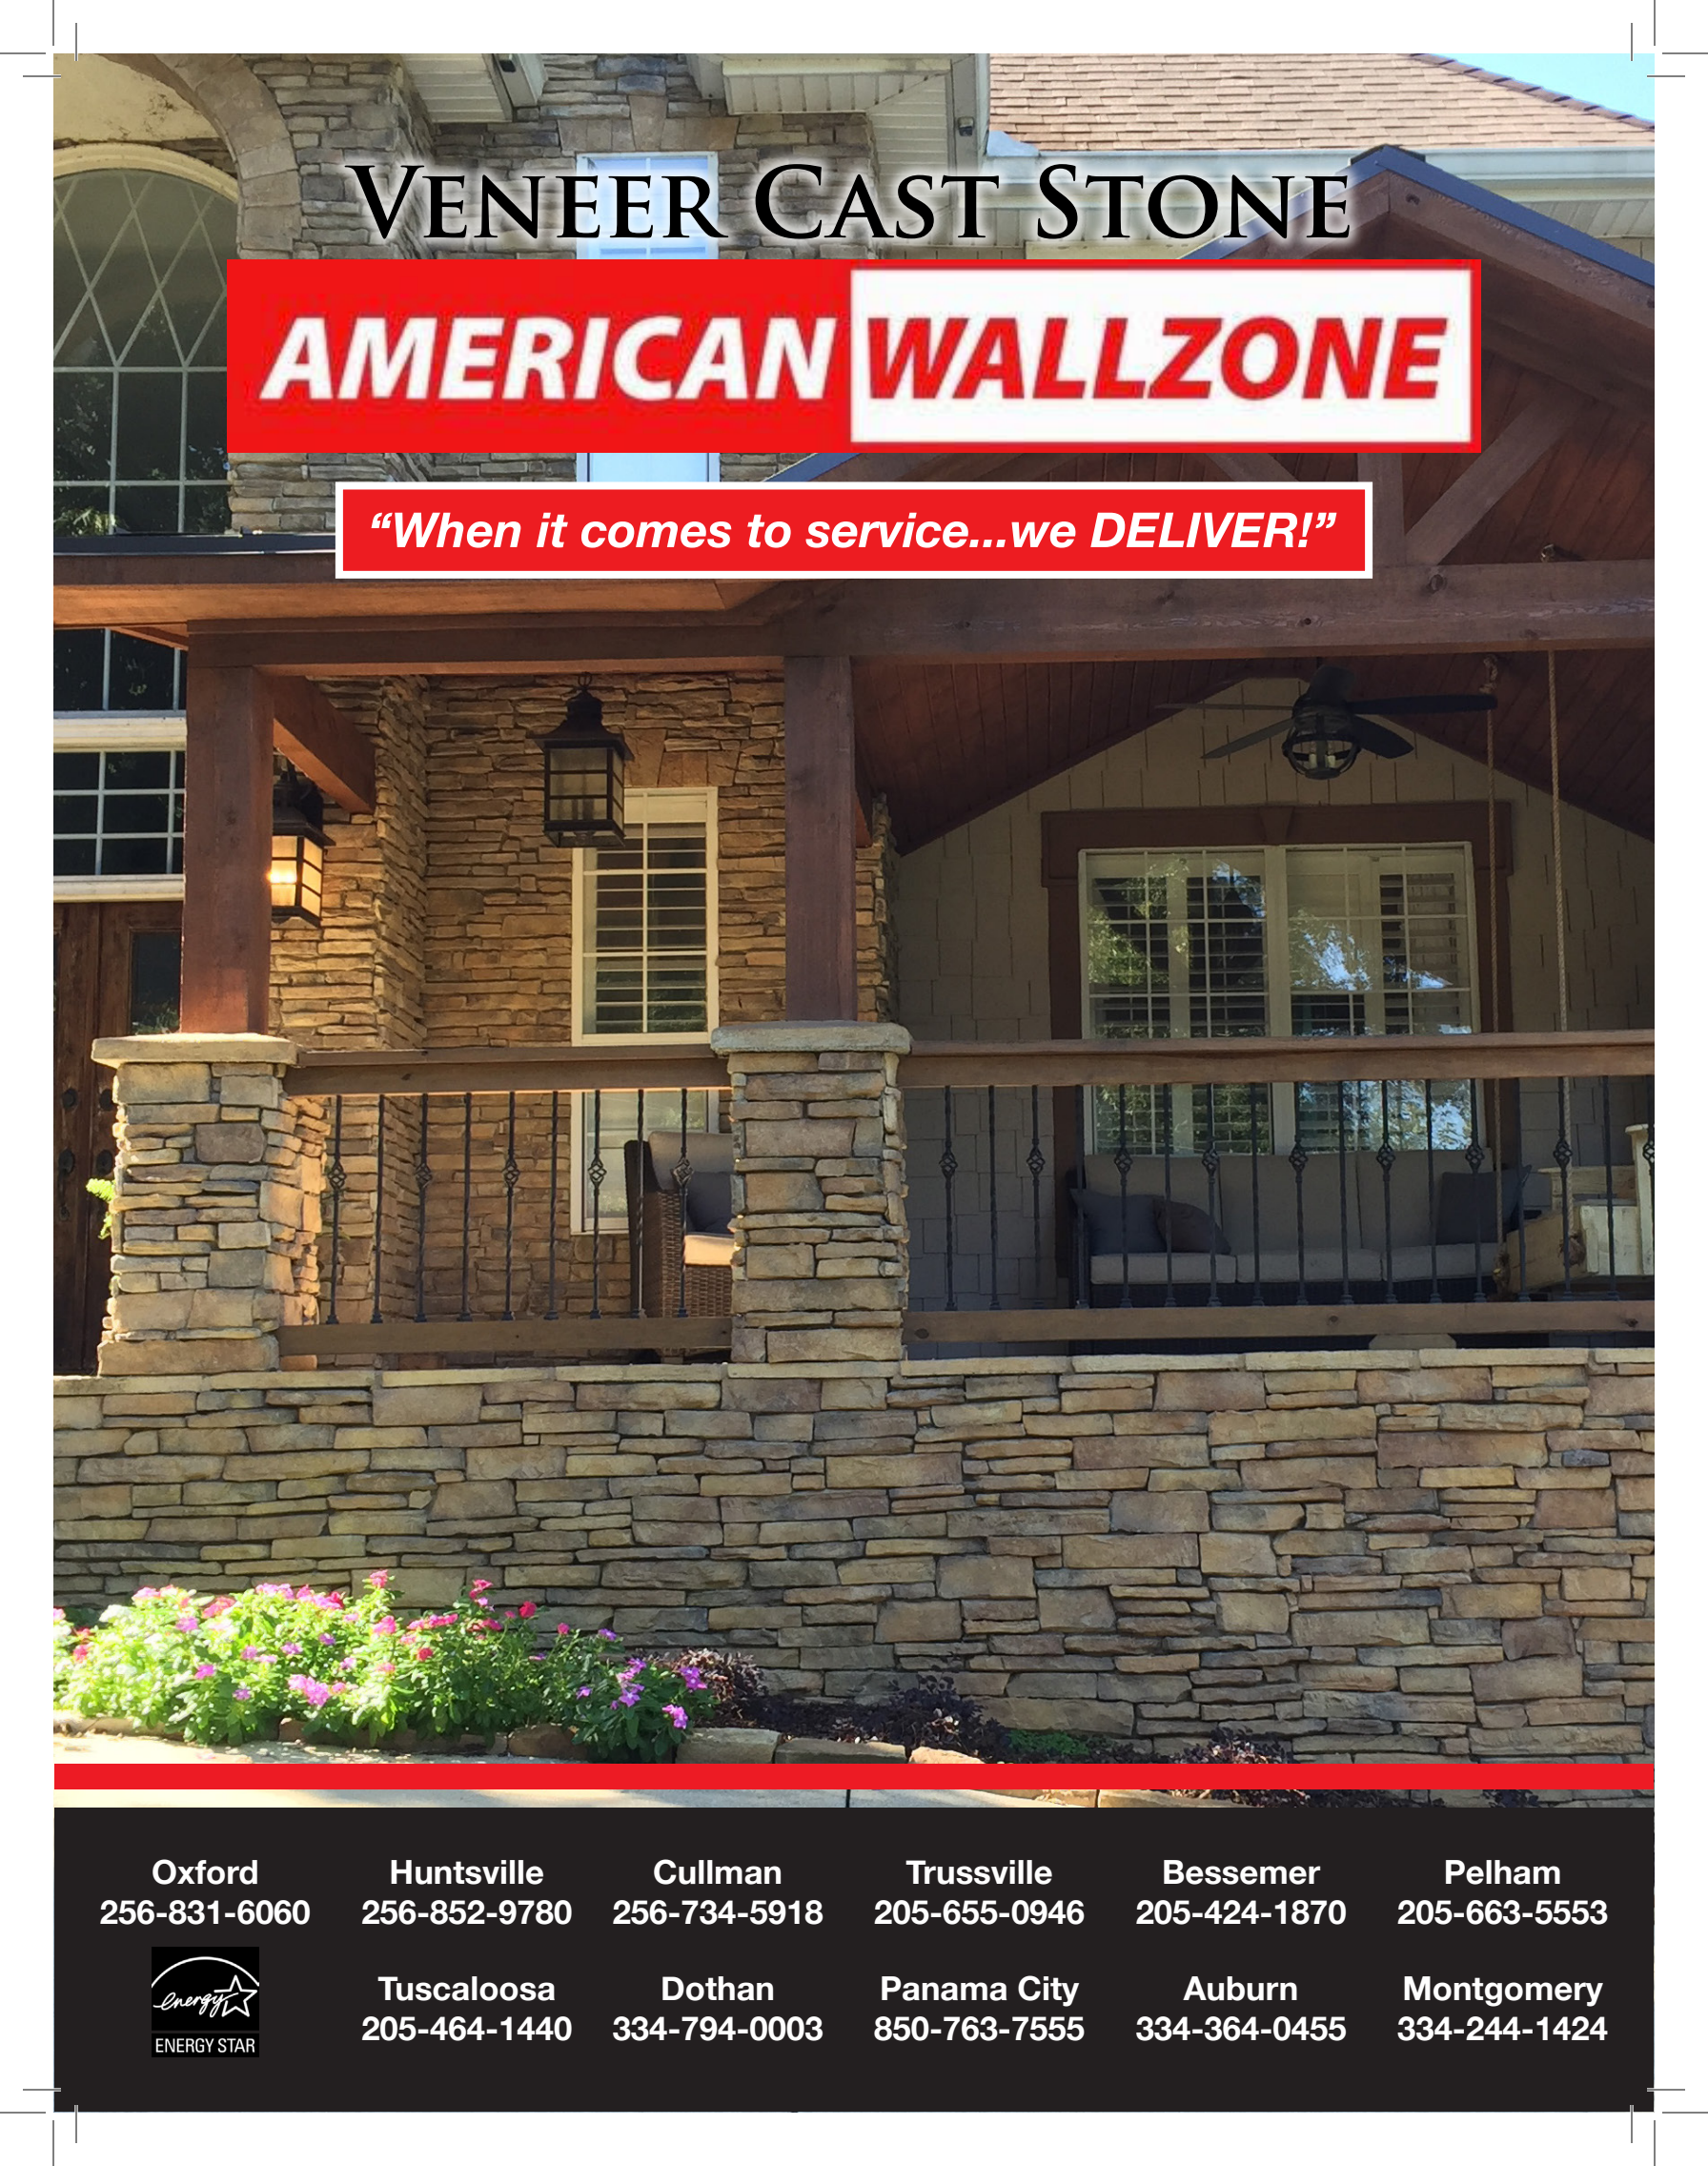

VENEER CAST STONE

AMERICAN WALLZONE

"When it comes to service...we DELIVER!"

Oxford
256-831-6060

Huntsville
256-852-9780

Cullman
256-734-5918

Trussville
205-655-0946

Bessemer
205-424-1870

Pelham
205-663-5553



Tuscaloosa
205-464-1440

Dothan
334-794-0003

Panama City
850-763-7555

Auburn
334-364-0455


Montgomery
334-244-1424

ALLURIAM STONE offers an array of original textures that beautifully create the shape and color of natural stone. Contractors and homeowners are choosing Alluriam Stone for indoor and outdoor use because it is attractive, durable, and cost-effective. Because it is bonded to the wall like tile, not built up from a footing like brick, our stone installs quickly.

ALLURIAM STONE is available in five patterns and dozens of colors. All orders are custom made in 7-10 days from order placement. Any color is available in any pattern to you or to your dealer. Special colors can be made. To avoid excess purchase, the stone may be ordered by the pallet or by the box. Window trim, flagstones, etc. are ordered by the piece.

Long-lasting value and beauty are ensured with a 50 year warranty, backed up by many 36 year old (and counting) jobs throughout the southeast.

STACKED

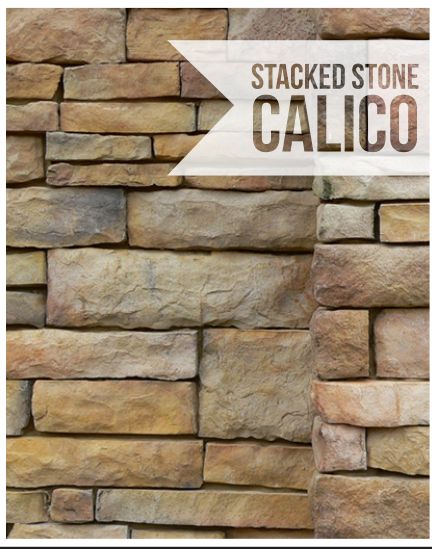

STACKED





RUBBLE



FIELDSTONE





SOUTHEASTERN LEDGESTONE

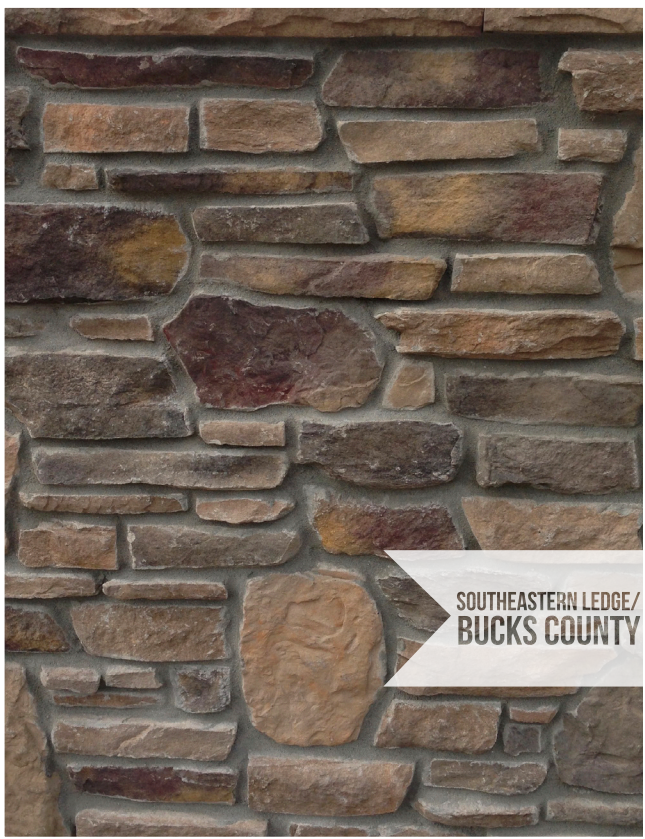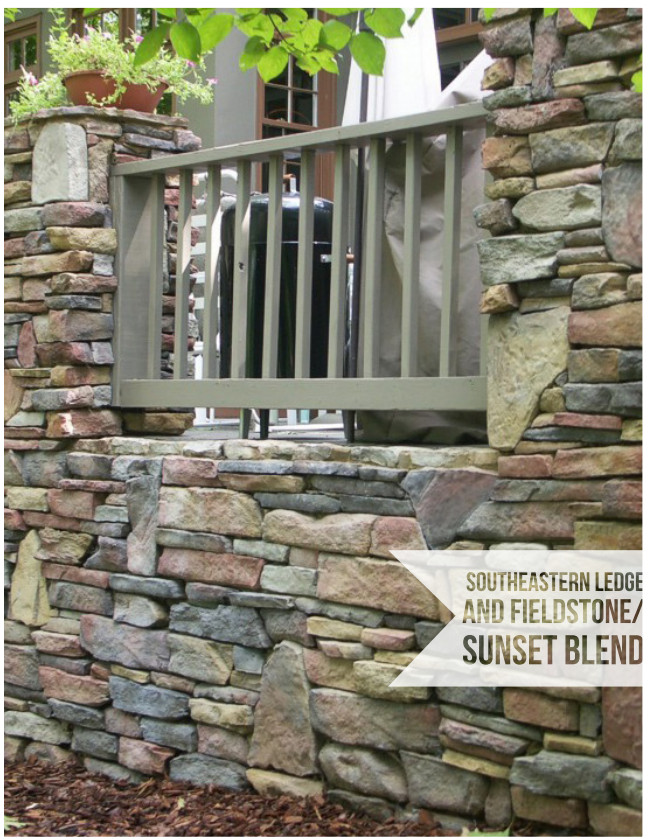






CAMBRIDGE



RIVER ROCK · CREEK ROCK · MINI STACK

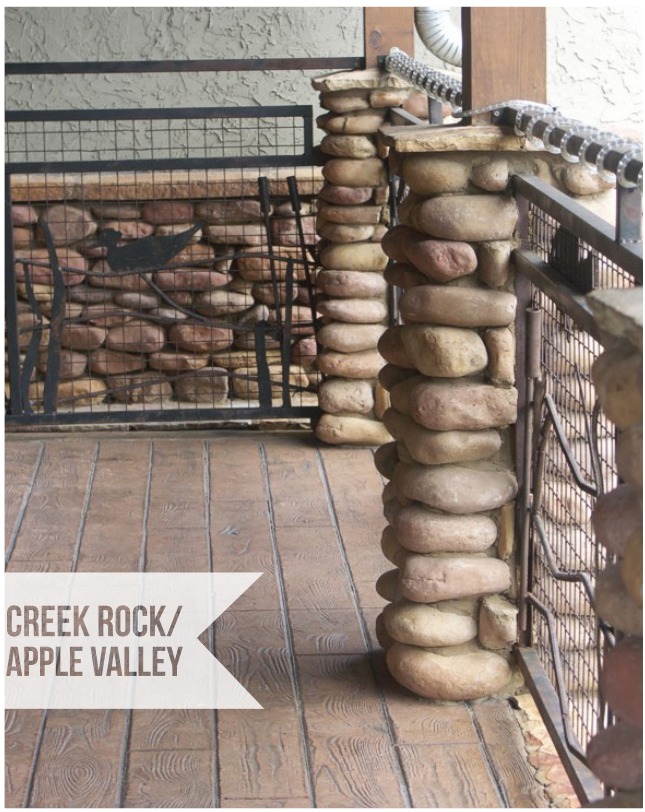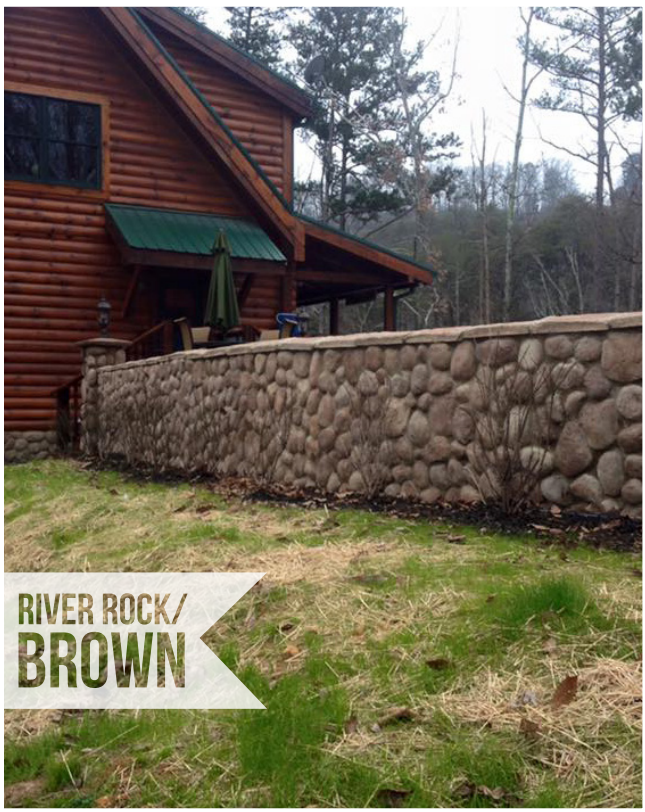

MIXTURES

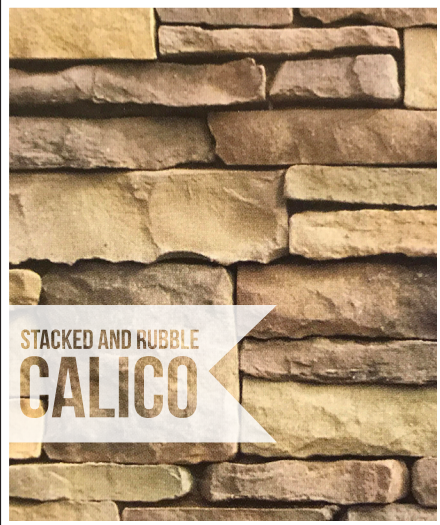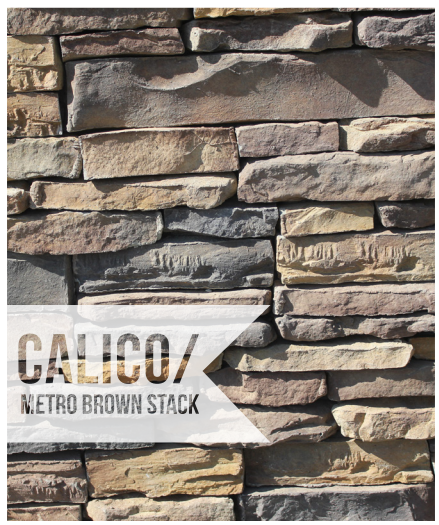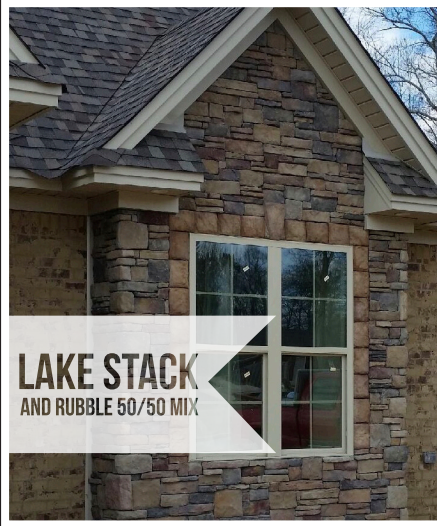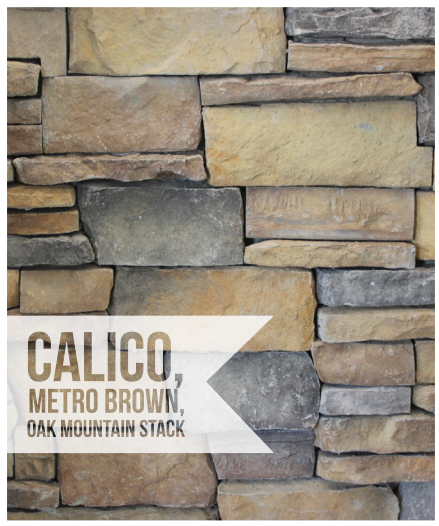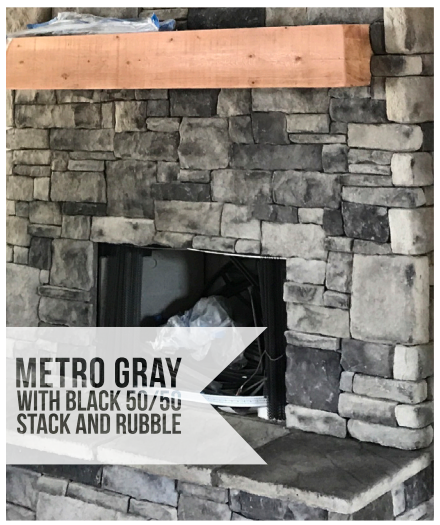

APPLICATIONS



METRO GREY RUBBLE WITH GROUT JOINT SHOWN ON COLUMN BASE



HEARTHSTONES AND COLUMN CAPS SHOWN ON OUTDOOR PAVILION



STACKED ASPEN AND DENVER BLEND W/ FIELDSPOTTERS SHOWN ON FIREPIT AND KNEE WALL



STACKED DENVER BLEND OUTDOOR KITCHEN



STACKED/BLACK ON BACKSPLASH



OUTDOOR FIREPLACE AND PIZZA OVEN



LAKE STACK AND RUBBLE IN POOL WATERFALL




STACKED DENVER BLEND BAR ISLAND




ASPEN STACK. RETAINING WALLS, STEPS, PORCH SURROUND

TRIM STONE

Aluriam’s trim stone requires only slight jobsite fitting. Trim stone may also be fabricated from standard stone pieces.

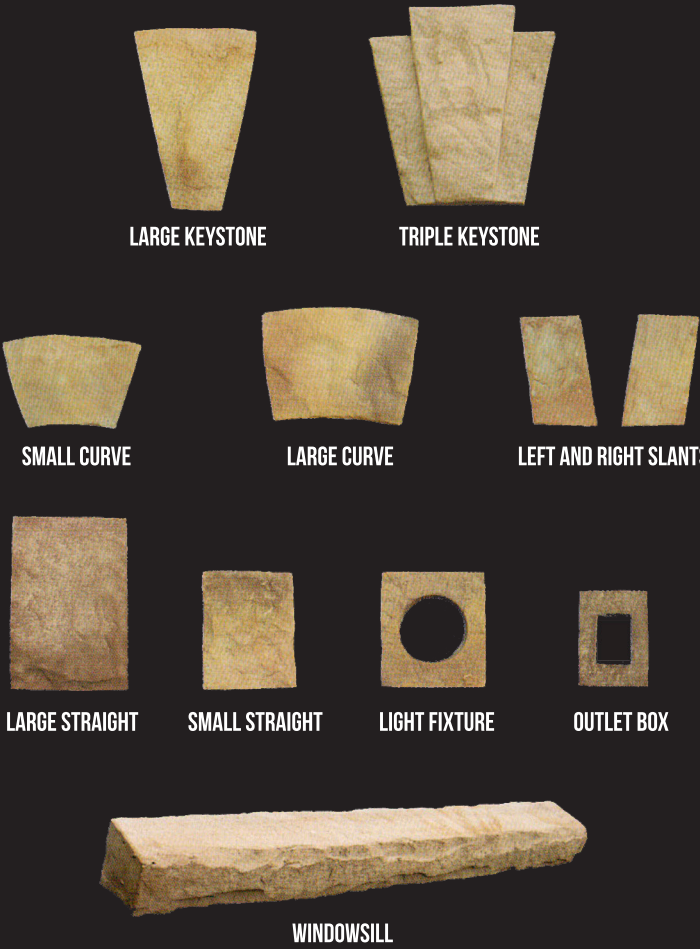

LARGE KEYSTONE/SLANTS

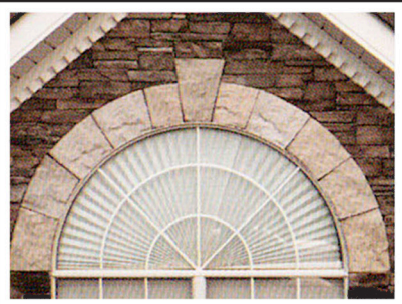


LARGE KEYSTONE W/ LARGE CURVED TRIM



WINDOWSILL (WATERTABLE)


CAPSTONE AND FLAGSTONE

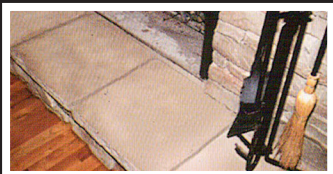

19 1/2 X 19 1/2 HEARTHSTONES AND WALLCAP



MODULAR PATTERN HEARTHSTONES

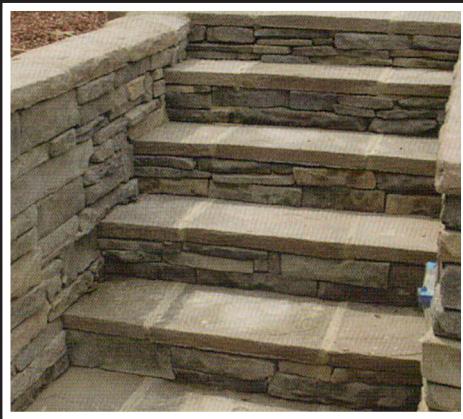

13.5 X 19 1/2 HEARTHSTONES AND WALLCAP



CHISELED COLUMN CAP AND WALLCAP

DETERMINING STONE QUANTITIES

- 1. WALL STONE: Multiply length X height and subtract openings. Divide irregular areas into smaller rectangles and triangles.
- 2. CORNER STONE: Measure the lineal feet of outside corners. One lineal foot of cornerstone will cover 1/2 sq. ft. of flat area.
- 3. FLAGSTONE: Measure the area and multiply length X width. Round up to match the square footage in the flagstone.
- 4. WALL CAPS AND TRIM PIECES: Measure the lineal feet needed and round up to the next whole piece.

MORTAR COLOR RECOMMENDATIONS

When dry stacking stone, the use of darkened adversion of the dominant stone color will make the best looking job. For grouted joints, a moderately contrasting color is best.

STONE COLOR	MORTAR COLOR	
	STACKING	GROUTING
Apple Valley, Aspen, Bucks County, Carmel Mountain, Calico, Chardonnay, Chatham Blend, Sunset Blend, Sandstone	Darkened Buff	Medium Gray Darkened Buff
Denver Blend, Metro Brown	Gray	Brown, Dark Gray
Oak Mountain, Limestone, Mossrock	Gray	Dark Gray, Black
Metro Gray, Metro Gray w/ Rust, English Gray	Gray	Dark Gray
Atlanta Brown, Arkansas	Brown	Dark Brown

FRESH VS. CURED STONE

Particularly in winter, many customers are concerned when freshly manufactured stone arrives that does not appear to match the sample color they had selected. Be advised that the color changes as the stone fully cures and curing takes longer in colder temperatures. If in doubt about a color, pieces maybe quickly cured ina conventional oven on a warm setting of about 150 degrees.



INSTALLATION NOTES

- 1. Detailed installation instructions are available to installers, DIY customers , and homeowners who inted to have stone installed.
- 2. On frame construction or any surface other that clean poured concrete or concrete block, galvanized wire lath is necessary. If the stone is the be dry stacked, a scratch coat of mortar will be applied to the lath. Veneer Cast Stone recommends applying the stone to the fresh mortar bed.
- 3. IMPORTANT. When applying stone to a dry cured scratch coat, dry concrete block, or a dry concrete wall, the wall must be thoroughly dampened to ensure a good bond.

50 YEAR LIMITED WARRANTY

Veneer Cast Stone, Inc. warrants Alluriam Stone Wall Veneer for a period of 50 years against manufacturing defects when installed in accordance with the manufacturer’s written instructions. Warranty coverage specifically excludes damage resulting from a wall movement, ground settling, chemical contact, discoloration due to contaminates, or efflorescence. Warranty covers replacement of product only and is void if is product is removed from a wall without written authorization from the manufacturer. Warranty coverage is limited to the original purchaser.

www.AmericanWallZone.com

American Wallzone Supply
2520 Pelham Parkway
Pelham, AL 35124
1-800-341-2626

PICTURES IN THIS BROCHURE MAY NOT REPRESENT EXACT STONE COLOR AND SHAPE RANGE. PLEASE CONTACT YOUR LOCAL DEALER FOR SAMPLES.