

Gabions are baskets made of 8x10 double twisted steel woven wire mesh, as per ASTM A975-97 (Figs. 1, 2). Gabions are filled with stones at the project site to form flexible, permeable, monolithic structures such as retaining walls, channel linings, and weirs for erosion control projects. The steel wire used in the manufacture of the gabion is heavily Galfan coated soft temper steel. The standard specifications of mesh wire are shown in Table 2. The gabion is divided into cells by means of diaphragms positioned at approximately 1m centers (Fig. 1). In order to reinforce the structure, all mesh panel edges are selvedged with a wire having a greater diameter (Table 3). Dimensions and sizes of Galfan coated gabions are shown in Table 1.

be such that, when the wire is wrapped six turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers, in accordance with ASTM A856-03.

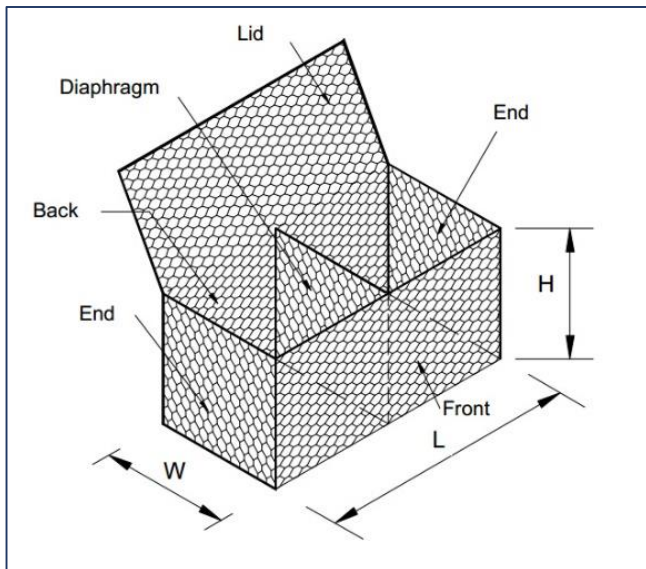
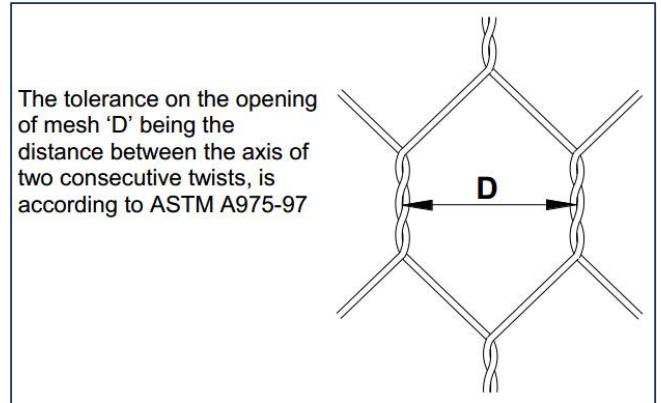


Figure 1

Wire

All tests on wire must be performed prior to manufacturing the mesh.

1. Tensile strength: the wire used for the manufacture of gabions shall have a maximum tensile strength of 75,000 psi (515 MPa) as per ASTM A856-03, soft temper steel. Wire tolerances (Table 3) are in accordance with ASTM A856-03.
2. Elongation: Elongation shall not be less than 12%, in accordance with ASTM A370-97. Test must be carried out on a sample at least 12 in. (30 cm) long.
3. Galfan coating: minimum quantities of Galfan shown at Table 3 meet the requirements of ASTM A856-03.
4. Adhesion of Galfan: the adhesion of the Galfan coating to the wire shall

Figure 2



Example of Gabion Wall

ZHUODA GABION

Table 1-Sizes for Gabions

L (m)	W (m)	H (m)	# of Cells
2	1	0.5	2
3	1	0.5	3
4	1	0.5	4
1.5	1	1	1
2	1	1	2
3	1	1	3
4	1	1	4

All sizes and dimensions are nominal.

Tolerances of $\pm 5\%$ of the width, height, and length of the gabions shall be permitted.

Quantity Request

When requesting a quotation, please specify:

- No. of units,
- Size of units (length x width x height, see Table 1),
- Mesh type,
- Type of coating.
- EXAMPLE: No. 100 gabions 2x1x1m - Mesh type 8x10 - Wire diam. 3.05 mm - Galfan.

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.5. Steel rings having the following specification can be used instead of lacing wire (Fig. 4):

Heavily galvanized steel rings for Galfan coated products

- Diameter: 3.05 mm, ASTM A313, Type 302, Class I
- Tensile strength: 1530-1745 MPa, ASTM A313-92.

Spacing of the rings must not exceed 150 mm (Fig. 3)

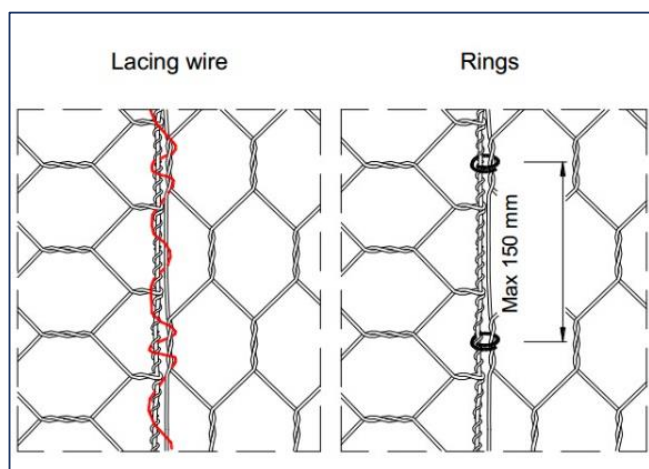


Figure 3

Table 2-Standard Mesh Wire

Mesh Type	D (mm)	Mesh Tolerance	Mesh Wire (mm)
8x10	83	$\pm 10\%$	2.70-3.05

Table 3-Standard Wire Diameters

Wire Diameter ϕ mm	2.20	2.70	3.05	3.40	3.80
Wire Tolerance (\pm) ϕ mm	0.10	0.10	0.10	0.10	0.10
Min. Qty of Galfan gr/m ²	214	244	259	259	275

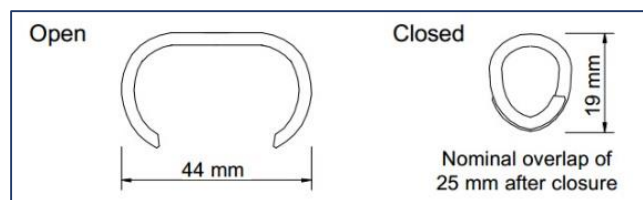


Figure 4



Figure 5

Anping County Zhuoda Hardware Mesh Co., Ltd.

Kehulin Industrial Park, Anping County, Hebei 053600, China

Tel: +86-311-67795238/89902855 Fax: +86-311-67795238

Email: sales@zhuoda-gabion.com

Website: www.zhuoda-gabion.com

