

Gabions are baskets made of double twisted steel woven wire mesh, as per EN 10223-3 (Figs. 1, 2). Gabions are filled with stones at the project site to form flexible, permeable, monolithic structures such as retaining walls, channel linings, and weirs for erosion control projects.

The steel wire used in the manufacture of the gabion is heavily zinc coated soft temper steel. The standard specifications of mesh wire are shown in Table 2.

The gabion is divided into cells by means of diaphragms positioned at approximately 1m centers (Fig.1). In order to reinforce the structure, all mesh panel edges are selvedged with a wire having a greater diameter (Tables 3, 4).

Dimensions and sizes of galvanized gabions are shown in Table 1.

times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers.

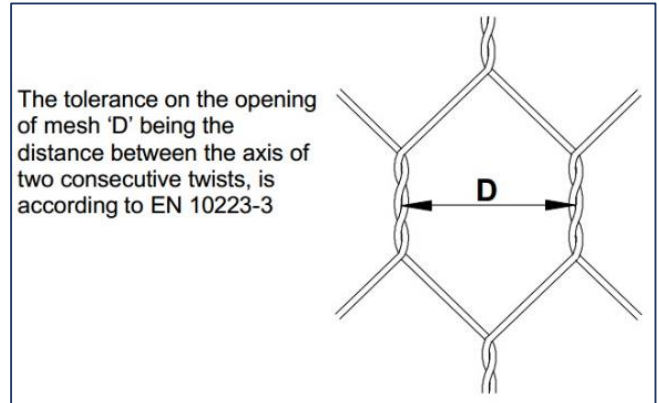


Figure 2

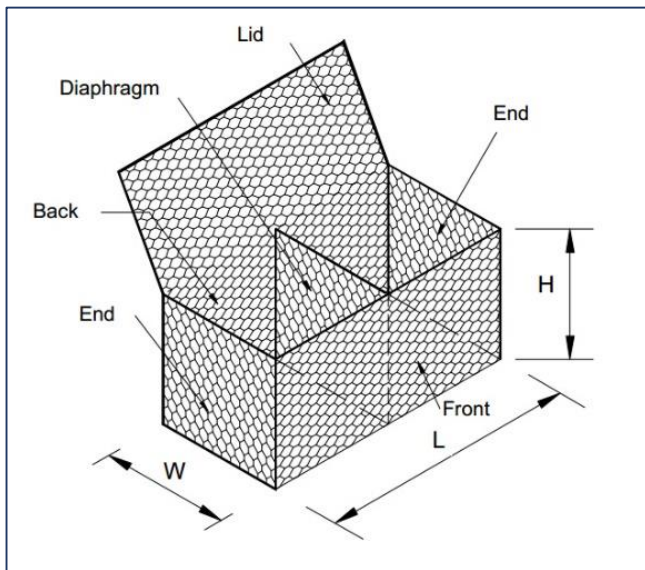


Figure 1

Wire

All tests on wire must be performed prior to manufacturing the mesh.

1. Tensile strength: the wire used for the manufacture of gabions shall have a tensile strength between 350-500 N/mm² according to EN 10223-3. Wire tolerances (Table 4) are in accordance with EN 10218 (Class T1).
2. Elongation: Elongation shall not be less than 10%, in accordance with EN 10223-3. Test must be carried out on a sample at least 25 cm long.
3. Zinc coating: minimum quantities of zinc shown at Table 4 meet the requirements of EN 10244-2 (Table 1, Class A).
4. Adhesion of zinc: the adhesion of the zinc coating to the wire shall be such that, when the wire is wrapped six turns around a mandrel having four



Example of Gabion Wall

ZHUODA GABION

Table 1-Sizes for Gabions

L (m)	W (m)	H (m)	Cells
2	1	0.5	2
3	1	0.5	3
4	1	0.5	4
1.5	1	1	1
2	1	1	2
3	1	1	3
4	1	1	4

All sizes and dimensions are nominal.

Tolerances of $\pm 5\%$ of the width, height, and length of the gabions shall be permitted.

Quantity Request

When requesting a quote, please specify:

- size of units (length x width x height, see Fig.1)
- type of mesh
- type of coating and diaphragms

EXAMPLE: No. 100 gabions 2x1x1m - Mesh type 8x10 – Wire dia. 2.70 mm-galvanized-with diaphragms.

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.5. Galvan coated steel rings having the following specification can be used instead of lacing wire (Figs. 3, 4):

- diameter: 3.00 mm
- tensile strength: 170 kg/mm².

Spacing of the rings must not exceed 200 mm (Fig.3)

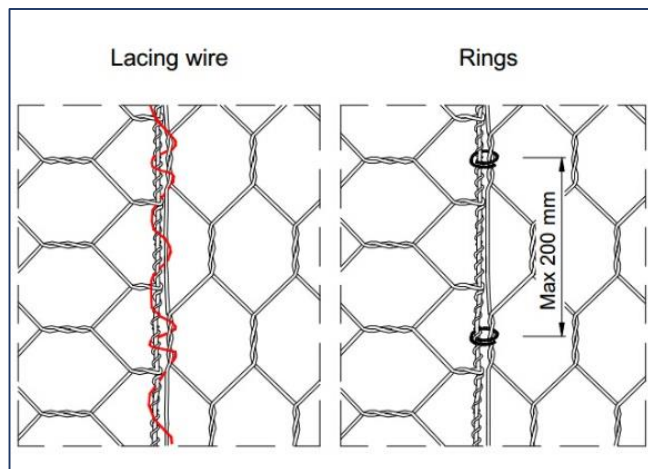


Figure 3

Table 2-Standard Mesh Wire

Mesh Type	D (mm)	Mesh Tolerance	Mesh Wire (mm)
6x8	60	+16% / -4%	2.70
8x10	80	+16% / -4%	2.70-3.00
10x12	100	+16% / -4%	2.70-3.00

Table 3-Standard Wire Diameters

Mesh Type	Mesh Wire (mm)	Selvage Wire (mm)	Lacing Wire (mm)
6x8	2.70	3.40	2.20
8x10	2.70	3.40	2.20
	3.00	3.90	2.40
10x12	2.70	3.40	2.20
	3.00	3.90	2.40

Table 4-Wire Tolerances and Coating

Wire Diameter ø mm	2.20	2.40	2.70	3.00	3.40	3.90
Wire Tolerance (\pm) ø mm	0.06	0.06	0.06	0.07	0.07	0.07
Min. Qty of Zinc gr/m ²	230	230	245	255	265	275

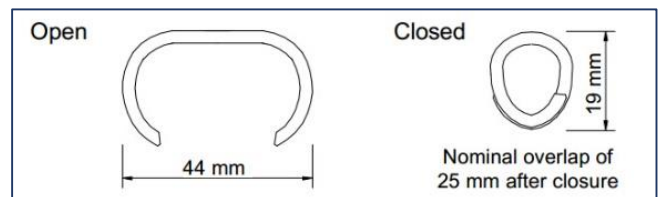


Figure 4



Figure 5

Anping County Zhuoda Hardware Mesh Co., Ltd.

Kehulin Industrial Park, Anping County, Hebei 053600, China

Tel: +86-311-67795238/89902855 Fax: +86-311-67795238

Email: sales@zhuoda-gabion.com

Website: www.zhuoda-gabion.com

ISO
9001:2008
REGISTERED