

# Barrel Band Installation Guide

For Ruger® PC Carbine™, Woodshop Wednesday LLC

*Handcrafted in Massachusetts, USA*



RUGER® PC CARBINE™





Questions? Contact Us @ [Angela@woodshopwednesday.com](mailto:Angela@woodshopwednesday.com)

### Disclaimer

Firearms can be very dangerous if handled improperly.

**WARNING: IT IS IMPERATIVE THAT THE INSTALLER OF OUR PRODUCT HAVE SUFFICIENT EXPERIENCE HANDLING A FIREARM AND PRACTICE GENERAL FIREARM SAFETY.** Woodshop Wednesday LLC is not liable for any personal injury or property damage resulting from improper operation or mishandling a firearm.



### Return Policy

We offer a 100% money back guarantee. If you are unhappy with the product or it is not up to your expectations, please specify the reason in writing and return the stock within 60 days of the purchase date. We will issue a full refund including the return shipping cost provided the stock has not been damaged or altered in any way.

### Warranty or Repairs

We warranty the functionality and craftsmanship of the stock for 6 months from the date of purchase. We do not warranty the finish of the stock with respect to scratches, cracks, gauges, or any other type of damage caused by abuse or neglect. Please contact us if your stock ever becomes damaged or unfunctional (even if past this warranty period).

### Care Instructions

Our stocks use Birchwood Casey ® Tru-Oil ® finish. Tru-Oil is a durable and very forgiving finish which can easily be touched up and repaired (unlike polyurethane and epoxy-based finishes). For general maintenance, we recommend applying a furniture grade past wax (ie Minwax or Johnson) during routine gun cleaning. Apply wax liberally in a circular pattern, allow to dry, then remove/ buff with a cotton cloth. To remove light scratches and blemishes, lightly rub the area with #0000 steel wool in the direction of the grain, then apply paste wax as described above.

## STEP 1:

**WARNING: PRIOR TO INSTALLING ANY PARTS ON YOUR FIREARM, ENSURE THAT YOUR RIFLE IS CLEARED AND THAT THE TRIGGER SAFETY IS ENGAGED. INSTALL A CHAMBER FLAG TO ENSURE THAT THE CHAMBER IS EMPTY.** Separate the barrel from the receiver. With the barrel removed from your Ruger® PC Carbine™, remove the factory handguard by unscrewing the mounting screw under the handguard. Below are the parts required to assembly the barrel band.



## STEP 2:

Install your new handguard using the original factory ruger mounting screw. Temporarily install the barrel onto the rifle with the woodstock installed and adjust the handguard position to be centered with the rifle stock. Once satisfied with the position, tighten the mounting screw to 10-12 in-lbs.

**CAUTION: DO NOT TIGHTEN THE SCREWS TO FACTORY TORQUE;**  
**DAMAGE MAY OCCUR.**

**⚠ CAUTION**



## STEP 7:

Install swivel sling mount by holding in the button while inserting it into the desired hole. The sling mount can be installed on either side. The installation is now complete. Use this guide in reverse to remove the barrel band if needed.

Push Button






## STEP 6:

Reinstall both screws into the barrel band and tighten both until the lower gap is parallel. Do not overtighten these screws.



## STEP 3:

Remove both screws from the barrel band using the 3mm Allen wrench provided. Thread one of the screws into the opposite side for the barrel band. Insert the zip tie provided into the gap and tighten the screw until it contacts the zip tie. Make sure the zip tie does not pass through the gap.

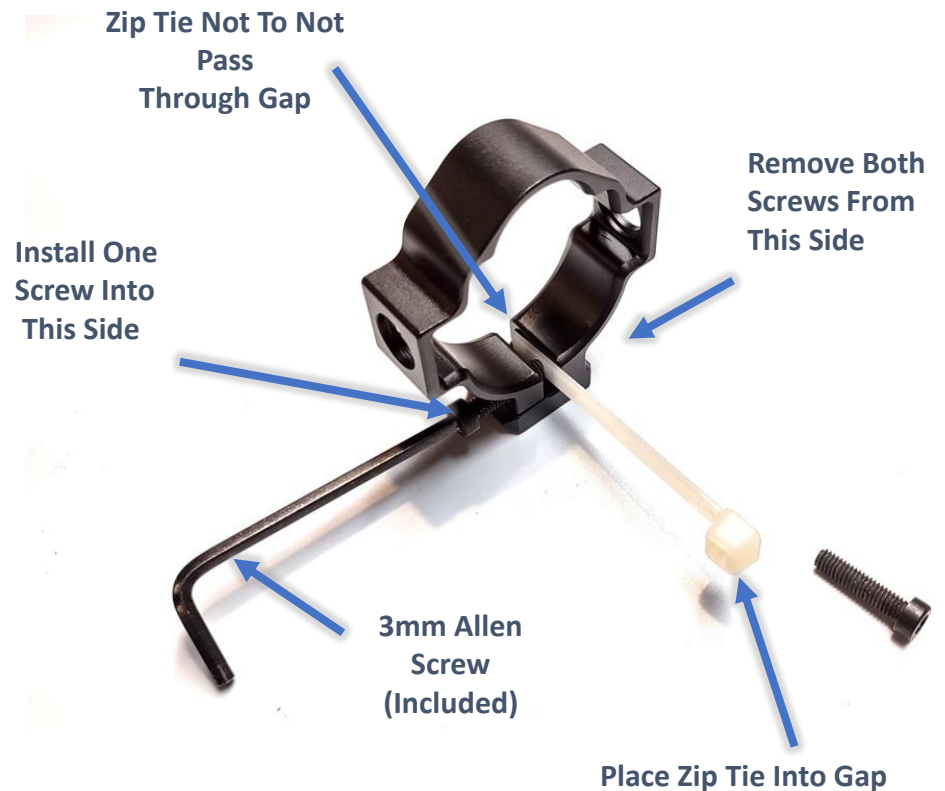

## STEP 4:

Slowly turn the screw to spread the barrel clamp open enough to slide over the front sight guides on the barrel. Orient the barrel band as shown while installing.

Turn Screw Just Enough To Spread The Band Over The Protective Ears On The Front Sight



## STEP 5:

Once the band is over the front sight, slide the barrel band onto the handguard. Make sure the handguard is fully seated on the barrel and the barrel band is flush with the step on the handguard. Once in place, remove the screw and zip-tie.

Once In Place, Remove The Screw And Zip Tie Using The 3mm Allen Wrench Provided



Slide Band Over The Front Handguard And Make Flush With Step