



EMT



Non-Insulated



Insulated

Raintight Compression Connectors

Features

- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Raintight - Wet locations
- Concrete tight
- Blue nut eases identification
- Suitable for use outdoor
- RoHS compliant

Standard Materials

- Steel
- Neoprene rubber
- Nylon compression ring

Standard Finish

- Zinc plated


Applicable Third Party Standards

- UL Standard: 514B
- A-A-50553A
- NEMA: FB-1
- UL Listed File # E200730

U.S. Patent No. 8.129.633



Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
Raintight Compression Fittings							
CCR-50KON	1/2	0.625	0.438	1.125	50	500	10.6
CCR-75KON	3/4	0.688	0.438	1.375	25	250	17.0
CCR-100KON	1	0.688	0.500	1.688	20	200	22.7
CCR-125KON	1 1/4	0.938	0.625	2.063	10	100	40.6
CCR-150KON	1 1/2	1.063	0.625	2.250	10	100	49.9
CCR-200KON	2	1.125	0.688	2.750	5	50	66.8
CCR-250KON	2 1/2	1.688	0.750	3.625	-	8	176.8
CCR-300KON	3	1.688	0.875	4.250	-	6	234.3
CCR-350KON	3 1/2	1.813	0.938	4.688	-	4	287.3
CCR-400KON	4	1.813	0.938	5.188	-	4	342.6
With Insulated Throat							
CCR50-ICKON	1/2	0.625	0.500	1.125	50	500	10.7
CCR75-ICKON	3/4	0.688	0.500	1.375	25	250	17.1
CCR100-ICKON	1	0.688	0.563	1.688	20	200	22.9
CCR125-ICKON	1 1/4	0.938	0.688	2.063	10	100	41.0
CCR150-ICKON	1 1/2	1.063	0.688	2.250	10	100	50.4
CCR200-ICKON	2	1.125	0.750	2.750	5	50	67.4
CCR250-ICKON	2 1/2	1.688	0.813	3.625	-	8	178.1
CCR300-ICKON	3	1.688	0.938	4.250	-	6	235.7
CCR350-ICKON	3 1/2	1.813	1.000	4.688	-	4	289.1
CCR400-ICKON	4	1.813	1.000	5.188	-	4	344.9

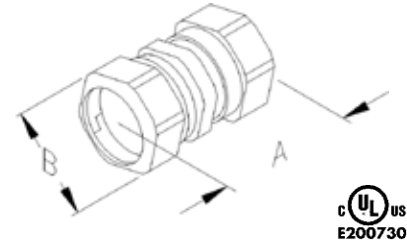

Raintight Compression Coupling

Raintight Compression Couplings

Features

- Heavy steel walls
- Raintight - Wet locations
- Concrete tight
- Blue nut eases identification
- Suitable for use outdoor
- RoHS compliant

Standard Materials

- Steel
- Nylon compression ring

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- A-A-50533A
- NEMA: FB-1
- UL Listed File # E200730

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
CKR-50KON	1/2	1.625	1.125	50	500	14.0
CKR-75KON	3/4	1.750	1.375	25	250	21.3
CKR-100KON	1	1.875	1.688	20	200	28.0
CKR-125KON	1 1/4	2.250	2.063	10	100	48.5
CKR-150KON	1 1/2	2.250	2.250	10	100	59.5
CKR-200KON	2	2.750	2.750	5	50	78.9
CKR-250KON	2 1/2	3.875	3.625	-	8	205.5
CKR-300KON	3	4.000	4.250	-	6	263.0
CKR-350KON	3 1/2	4.688	4.688	-	4	309.4
CKR-400KON	4	4.938	5.188	-	4	393.4