



EMT



Non-Insulated



Insulated



Steel Compression Connectors for Steel Conduit

Features

- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Concrete tight
- UL listed for steel and aluminum EMT conduit
- RoHS compliant

Standard Materials

- Nylon
- Steel

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- A-A-50553A
- NEMA: FB-1
- UL Listed File # E200730

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
Steel Compression Connectors							
CC50RKON	1/2	0.625	0.437	1.125	50	500	10.6
CC75RKON	3/4	0.688	0.437	1.375	25	250	17.0
CC100RKON	1	0.688	0.500	1.688	20	200	22.7
CC125RKON	1 1/4	0.938	0.625	2.063	10	100	40.6
CC150RKON	1 1/2	1.063	0.625	2.250	10	100	49.9
CC200RKON	2	1.125	0.687	2.750	5	50	66.8
CC250RKON	2 1/2	1.688	0.750	3.625	-	8	176.8
CC300RKON	3	1.688	0.875	4.250	-	6	234.3
CC350RKON	3 1/2	1.813	0.937	4.688	-	4	287.3
CC400RKON	4	1.813	0.937	5.188	-	4	342.6
With Insulated Throat							
CC50-ICRKON	1/2	0.625	0.500	1.125	50	500	10.7
CC75-ICRKON	3/4	0.688	0.500	1.375	25	250	17.1
CC100-ICRKON	1	0.688	0.563	1.688	20	200	22.9
CC125-ICRKON	1 1/4	0.938	0.688	2.063	10	100	41.0
CC150-ICRKON	1 1/2	1.063	0.688	2.250	10	100	50.4
CC200-ICRKON	2	1.125	0.750	2.750	5	50	67.4
CC250-ICRKON	2 1/2	1.688	0.813	3.625	-	8	178.1
CC300-ICRKON	3	1.688	0.938	4.250	-	6	235.7
CC350-ICRKON	3 1/2	1.813	1.000	4.688	-	4	289.1
CC400-ICRKON	4	1.813	1.000	5.188	-	4	344.9

Steel Compression Couplings

Features

- Heavy steel walls
- Concrete tight
- UL Listed for steel and aluminum EMT conduit
- RoHS compliant

Standard Materials


- Steel

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- A-A-50553A
- NEMA: FB-1
- UL Listed File # E200730

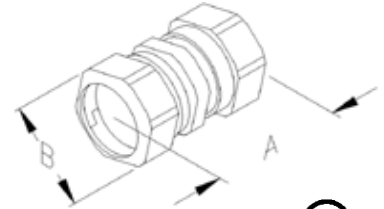

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
CK50RKON	1/2	1.625	1.125	50	500	14.0
CK75RKON	3/4	1.750	1.375	25	250	21.3
CK100RKON	1	1.875	1.688	20	200	28.0
CK125RKON	1 1/4	2.250	2.063	10	100	48.5
CK150RKON	1 1/2	2.250	2.250	10	100	59.5
CK200RKON	2	2.375	2.750	5	50	78.9
CK250RKON	2 1/2	3.875	3.625	-	8	205.5
CK300RKON	3	4.000	4.250	-	6	263.0
CK350RKON	3 1/2	4.063	4.688	-	4	309.4
CK400RKON	4	4.938	5.188	-	4	393.4