




25-150 litre kilns


Unparalleled precision, exquisite craftmanship



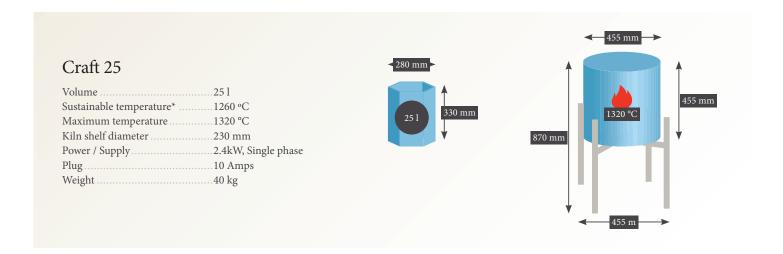

* Sustainable temperature

Advised for lower energy use and greater durability. See a more expansive explanation on the next page.

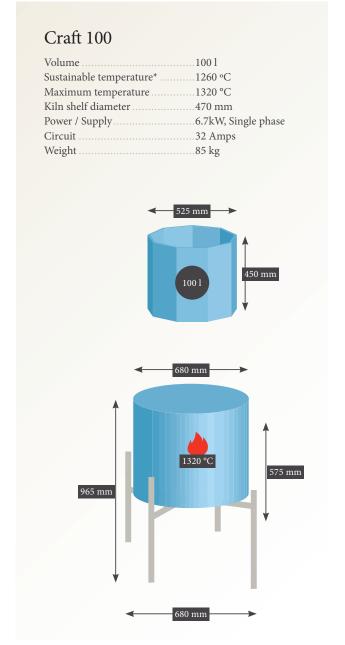

Craft 'Smart' 60

"The sustainable kiln for every potter!"

Lower power use, longer firing





Multi layered insulation for low power use

- Monobody design
- Extra insulation on bottom and lid
- Insulation blanket surrounding 128kg-m3 kiln



Safety mechanisms

- Power inside the kiln is shut off when the lid is opened
- The kiln is shut off by safety relay during controller malfunction



Sustainable and easy


to use

- Extra sturdy kanthal wire
- Springs in lid for easy open and close
- All the plugs are accessible from the backside of the kiln



Craft 'Smart' 60

Volume 60 l
Sustainable temperature* 1260 °C
Maximum temperature 1300 °C
Kiln shelf diameter 350 mm
Power / Supply 4.0kW, Single phase
Plug 20 Amps
Weight 69 kg

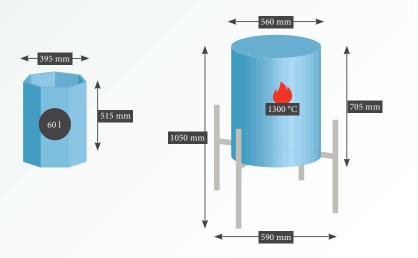



Fired Up Kilns

Introducing the Craft Kiln Range, a superior product with over 40 years of proven excellence in the market. Originating from the Netherlands, these meticulously crafted kilns have become synonymous with quality and reliability. Every Craft Kiln in our range is meticulously hand-built, ensuring the highest level of precision and attention to detail.











		Craft 25	Craft 'Smart' 60	Craft 100	Craft 120	Craft 150
Sustainable T.	°C	1260	1260	1260	1260	1260
Max T.	°C	1320	1300	1320	1320	1320
Power	W	2400 (2.4kW)	4000 (4.0kW)	6700 (6.7kW)	7200 (7.2kW)	8400 (8.4kW)
Draw Power	Amps	10 Amps	16.6 Amps	28 Amps	30 Amps	35 Amps
Supply		Single Phase	Single Phase	Single Phase	Single or 3 Phase	Single or 3 Phase
Plug / Circuit		10 Amp Power Point	20 Amp Power Point	32 Amp Circuit	32 Amp Circuit	40 Amp Circuit
				*Requires hard-wiring to an isolator switch by electrician		
Inside measurements	ø mm	280	395	525	525	525
	H mm	330	515	450	570	680
Outside measurements with frame	W×H mm	455 x 770 / 870	590 x 950 / 1050	680 x 865 / 965	680 x 1000 / 1100	680 x 1100 / 1200
Kiln shelf diameter	0 mm	230	350	470	470	470
Weight	kg	40	69	85	95	100

Properties

- Top loading
- Casing made of high-quality stainless steel
- 25 mm insulation blanket for optimal power saving
- Insulation plates in bottom and lid (only in the Craft 'Smart' 60)
- Elements made of sustainable and durable kanthal wire (extra thick kanthal wire in the Craft 'Smart' 60)
- Safe and solid connection to your controller
- Quality TC 75 digital controller
- 2 year warranty. See our terms and conditions
- Our unique flex frame. Reversible so your kiln can be used on two heights (10 cm higher or lower).
- Low weight. Relatively easy to move.
- Modular. Customise the kiln to your situation with a range of options.

Sustainable temperature

All kilns are designed for long lasting use. With the sustainable temperature the kiln will be more durable and economical in use. Most of our kilns' sustainable temperature is $1260\,^{\circ}$ C, perfectly suitable for bisque, earthenware, glaze, stoneware and porcelain.

The maximum temperature is the temperature the kiln can reach. Use of the maximum temperature will also cause maximum wear and consumption, though this does not necessarily lead to an optimal result. We recommend using the maximum temperature for exceptions only.



Increased mobility with wheels



Elements made of sustainable kanthal wire



Move easily with handles



Controllers

Our Craft Range are equipped with the TC 75 Digital Controller.

Easy to use, with ability to save programs. Complete with delayed start soaking and cooling in degrees per hour.

Programmed error notification.



Fired Up Kilns Guarantee

Well advised purchase

Which Kiln suits you best? We will gladly answer any questions you might have regarding the purchase of your new kiln. Come by the factory or send an e-mail to enquiries@firedupkilns.com.au

Delivery and installation

- · We offer delivery anywhere in Australia and New Zealand
- Ensure the power source is correct for the kiln.
- \bullet $\;$ The kiln must be placed on a stable, tile, stone or concrete floor.
- The kiln must have a surrounding free space of at least 30 cm.

Accessories

Ensuring the smooth operation and longevity of your kiln is essential, which is why we stock an extensive collection of essential components. We recognise the importance of variety and choice and stock a wide range of cones, clays, underglazes, kiln furniture and more. To see our full range visit www.firedupkilns.com.au

2 Year Warranty

Our mission is to provide you with exceptional customer service, and our warranty is a testament to that commitment.



Fired Up Kilns Factory 39, 10 Cawley Road Yarraville VIC 3013

www.firedupkilns.com.au

	TC 75	
Control range	0-1320 °C	
Steps	1 °C steps	
Led display	4-digits	
Display units	✓	
Firing segment display	✓	
Event control	_	
Error display	✓	
Safety lock	_	
Power consumption display	_	
Temperature protection	✓	
ROHDE app	_	
Firing programs	6	
Segments	7	
Stat up time	0:00-09:59 h	
Firing up speed 1	1-999 °C/h or SKIP	
Switching point	20-1320 °C	
Wait 1	_	
Firing up speed 2	1-999 °C / h or SKIP	
Wait 2	0:00-99:59 h	
Cooldown time	1-999 °C/h or SKIP	
Dimensions	80×153×22 mm	
Weight	340 g	

