



FIRED ^{UP} KILNS

Craft Range



25 -150 litres

TC 75 Digital
Controller


2 year warranty

25-150 litre kilns

Unparalleled precision, exquisite craftsmanship


Craft 25

Volume	25 l
Sustainable temperature*	1260 °C
Maximum temperature	1320 °C
Kiln shelf diameter	230 mm
Power / Supply	2.4kW, Single phase
Plug	10 Amps
Weight	40 kg

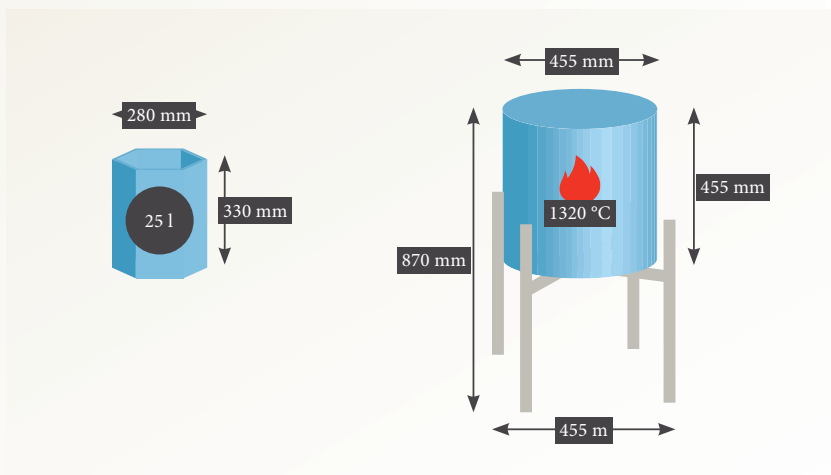


Craft 50

Volume	50 l
Sustainable temperature*	1260 °C
Maximum temperature	1320 °C
Kiln shelf diameter	320 mm
Power / Supply	3.6kW, Single phase
Circuit	15 Amps
Weight	70 kg

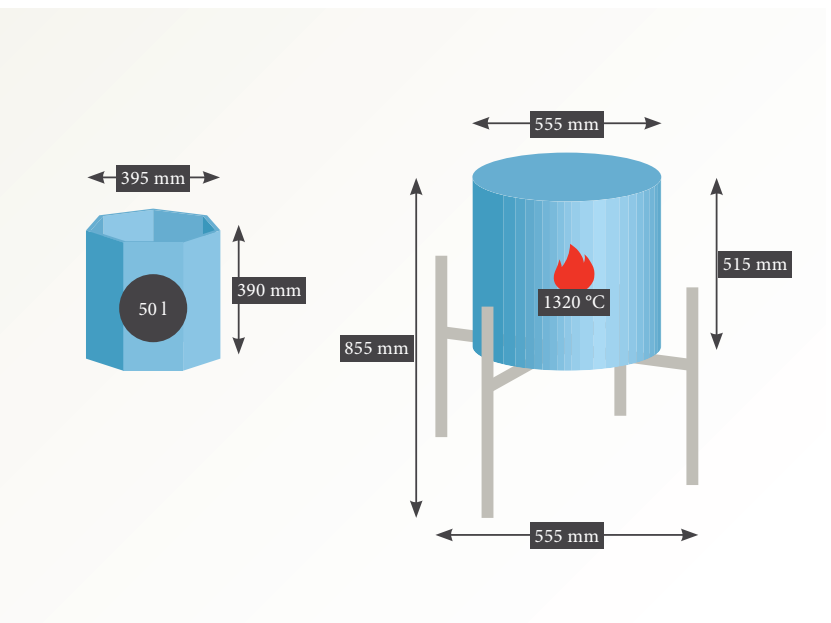

Craft 70

Volume	70 l
Sustainable temperature*	1260 °C
Maximum temperature	1320 °C
Kiln shelf diameter	430 mm
Power / Supply	5.8kW, Single
Circuit	32 Amps
Weight	75 kg

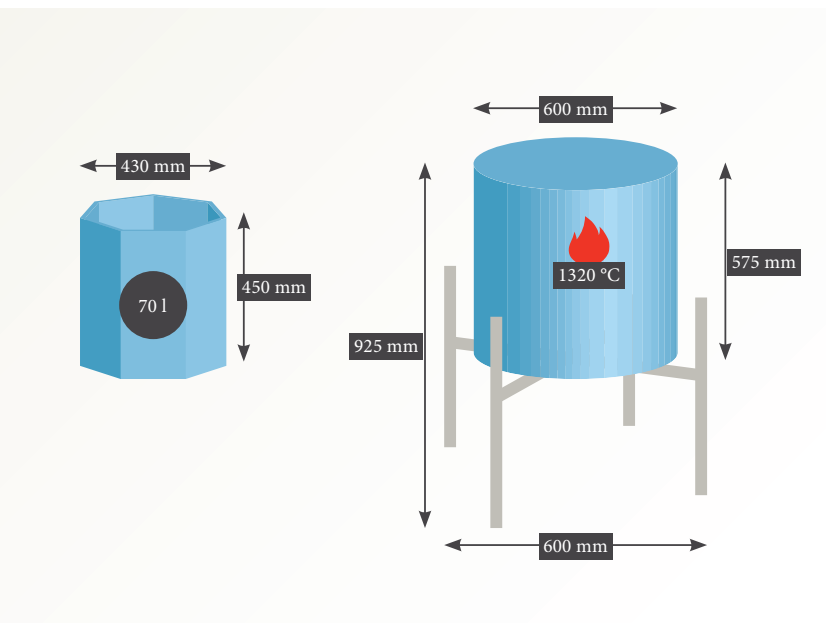

Craft 'Smart' 60

"The sustainable kiln for every potter!"

Lower power use, longer firing

20% Less Energy Consumption



Multi layered insulation for low power use

- ◆ Monobody design
- ◆ Extra insulation on bottom and lid
- ◆ Insulation blanket surrounding 128kg-m3 kiln



Safety mechanisms

- ◆ Power inside the kiln is shut off when the lid is opened
- ◆ The kiln is shut off by safety relay during controller malfunction



Sustainable and easy to use



- ◆ Extra sturdy kanthal wire
- ◆ Springs in lid for easy open and close
- ◆ All the plugs are accessible from the backside of the kiln



Craft 'Smart' 60 litre kiln


Craft 'Smart' 60

Volume	60 l
Sustainable temperature*	1260 °C
Maximum temperature	1300 °C
Kiln shelf diameter	350 mm
Power / Supply	4.0kW, Single phase
Plug	20 Amps
Weight	69 kg

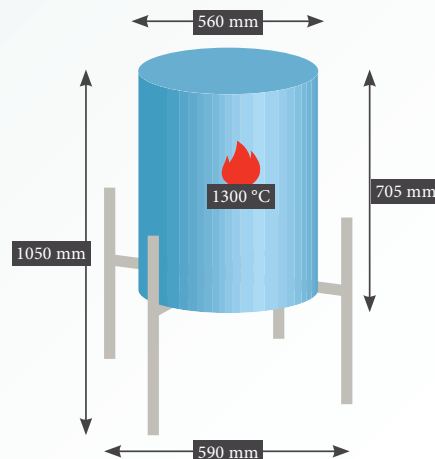

Craft 100


Volume 100 l
 Sustainable temperature* 1260 °C
 Maximum temperature 1320 °C
 Kiln shelf diameter 470 mm
 Power / Supply 6.7kW, Single phase
 Circuit 32 Amps
 Weight 85 kg

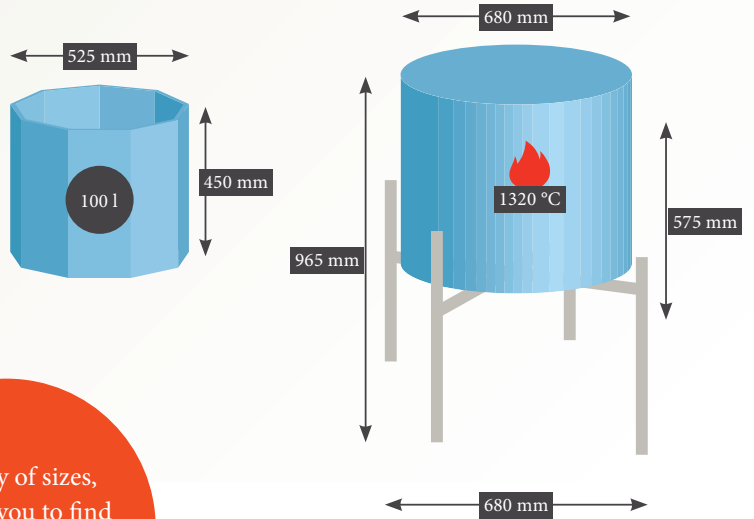

A variety of sizes,
 allowing you to find
 the perfect fit for your
 studio or workspace


Craft 120

Volume 120 l
 Sustainable temperature* 1260 °C
 Maximum temperature 1320 °C
 Kiln shelf diameter 470 mm
 Power / Supply 7.2kW, Single or 3 phase
 Circuit 32 Amps
 Weight 95 kg

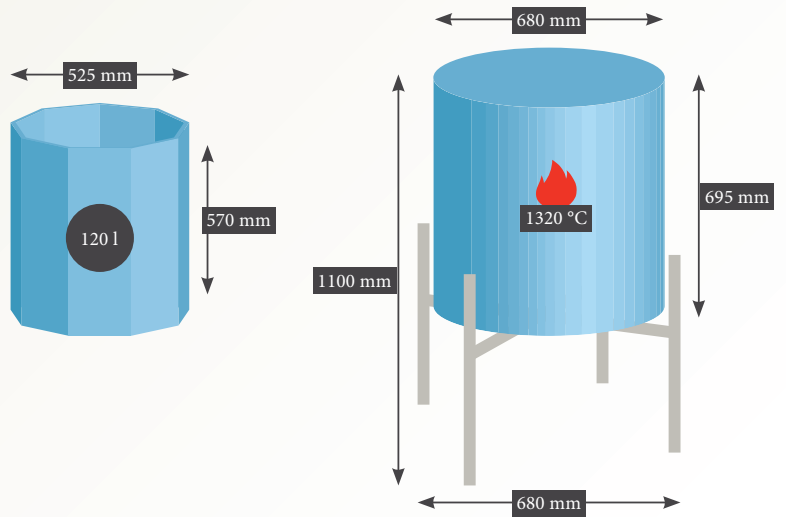


Craft 150

Volume 150 l
 Sustainable temperature* 1260 °C
 Maximum temperature 1320 °C
 Kiln shelf diameter 470 mm
 Power / Supply 8.4kW, Single or 3 phase
 Circuit 40 Amps
 Weight 100 kg

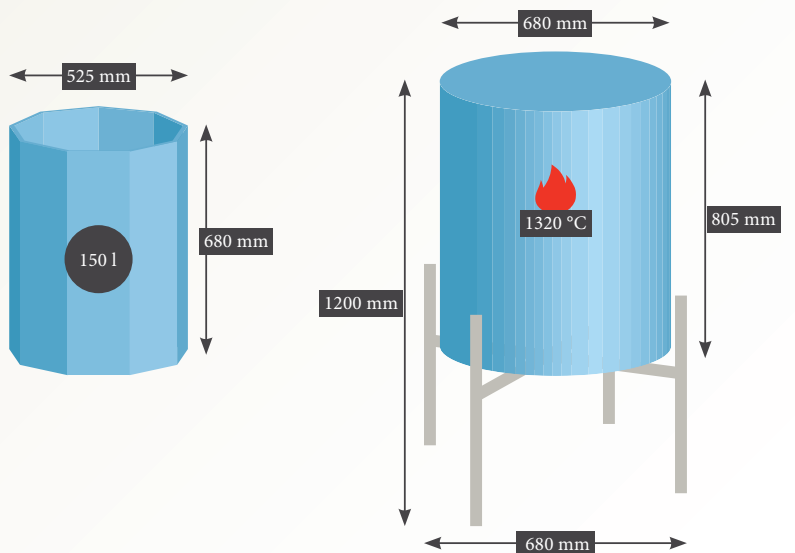

Fired Up Kilns

Introducing the Craft Kiln Range, a superior product with over 40 years of proven excellence in the market. Originating from the Netherlands, these meticulously crafted kilns have become synonymous with quality and reliability. Every Craft Kiln in our range is meticulously hand-built, ensuring the highest level of precision and attention to detail.

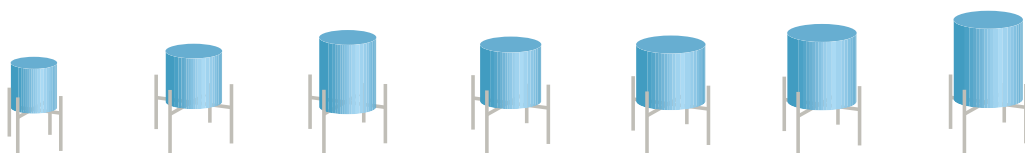

		Craft 25	Craft 50	Craft 'Smart' 60	Craft 70	Craft 100	Craft 120	Craft 150
Sustainable T.	°C	1260	1260	1260	1260	1260	1260	1260
Max T.	°C	1320	1320	1300	1320	1320	1320	1320
Power	W	2400 (2.4kW)	3600 (3.6kW)	4000 (4.0kW)	5800 (5.8kW)	6700 (6.7kW)	7200 (7.2kW)	8400 (8.4kW)
Draw Power	Amps	10 Amps	15 Amps	16.6 Amps	25 Amps	28 Amps	30 Amps	35 Amps
Supply		Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single or 3 Phase	Single or 3 Phase
Plug / Circuit		10 Amp Power Point	20 Amp Power Point	20 Amp Power Point	32 Amp Circuit	32 Amp Circuit	32 Amp Circuit	40 Amp Circuit
*Requires hard-wiring to an isolator switch by an electrician								
Inside measurements	W mm	280	395	395	430	525	525	525
	H mm	330	390	515	450	450	570	680
Outside measurements with frame	W x H mm	455 x 770/870	555 x 755/855	590 x 950/1050	600 x 825/925	680 x 865/965	680 x 1000/1100	680 x 1100/1200
Kiln shelf diameter	Ø mm	230	320	350	350	470	470	470
Weight	kg	40	70	69	75	85	95	100

Properties

- ◆ Top loading
- ◆ Casing made of high-quality stainless steel
- ◆ 25 mm insulation blanket for optimal power saving
- ◆ Insulation plates in bottom and lid (only in the Craft 'Smart' 60)
- ◆ Elements made of sustainable and durable kanthal wire (extra thick kanthal wire in the Craft 'Smart' 60)
- ◆ Safe and solid connection to your controller
- ◆ Quality TC 75 digital controller
- ◆ 2 year warranty. See our terms and conditions
- ◆ Our unique flex frame. Reversible so your kiln can be used on two heights (10 cm higher or lower).
- ◆ Low weight. Relatively easy to move.
- ◆ Modular. Customise the kiln to your situation with a range of options.


Sustainable temperature

All kilns are designed for long lasting use. With the sustainable temperature the kiln will be more durable and economical in use. Most of our kilns' sustainable temperature is 1260 °C, perfectly suitable for bisque, earthenware, glaze, stoneware and porcelain.

The maximum temperature is the temperature the kiln can reach. Use of the maximum temperature will also cause maximum wear and consumption, though this does not necessarily lead to an optimal result. We recommend using the maximum temperature for exceptions only.



Increased mobility with wheels



Elements made of sustainable kanthal wire



Move easily with handles

Controllers

Our Craft Range are equipped with the TC 75 Digital Controller.

Easy to use, with ability to save programs. Complete with delayed start soaking and cooling in degrees per hour. Programmed error notification.



	TC 75
Control range	0-1320 °C
Steps	1 °C steps
Led display	4-digits
Display units	✓
Firing segment display	✓
Event control	-
Error display	✓
Safety lock	-
Power consumption display	-
Temperature protection	✓
ROHDE app	-
Firing programs	6
Segments	7
Stat up time	0:00-09:59 h
Firing up speed 1	1-999 °C / h or SKIP
Switching point	20-1320 °C
Wait 1	-
Firing up speed 2	1-999 °C / h or SKIP
Wait 2	0:00-99:59 h
Cooldown time	1-999 °C / h or SKIP
Dimensions	80 × 153 × 22 mm
Weight	340 g

Fired Up Kilns Guarantee

Well advised purchase

Which Kiln suits you best? We will gladly answer any questions you might have regarding the purchase of your new kiln. Come by the factory or send an e-mail to enquiries@firedupkilns.com.au

Delivery and installation

- We offer delivery anywhere in Australia and New Zealand
- Ensure the power source is correct for the kiln.
- The kiln must be placed on a stable, tile, stone or concrete floor.
- The kiln must have a surrounding free space of at least 30 cm.

Accessories

Ensuring the smooth operation and longevity of your kiln is essential, which is why we stock an extensive collection of essential components. We recognise the importance of variety and choice and stock a wide range of cones, clays, underglazes, kiln furniture and more. To see our full range visit www.firedupkilns.com.au

2 Year Warranty

Our mission is to provide you with exceptional customer service, and our warranty is a testament to that commitment.



See our website for our wide range of stacking material.



Fired Up Kilns
10 Helen Street
Heidelberg West VIC 3081

www.firedupkilns.com.au