





OVERVIEW

Brewery wastewater is high in BOD, solids and presents many challenges for pretreatment.

The PrO2 is a revolutionary, patented technology that delivers truly dissolved oxygen to remediate brewery wastewater at a small fraction of the cost of conventional aeration methods.

- High Capacity
- Low Energy Costs
- Low Operating Costs
- Low Maintenance

The PrO2 series includes units capable of introducing a concentrated volume of dissolved oxygen treated solution at 15 gpm (6 lbs O2/hr), 80 gpm (32 lbs O2/hr, and 140 gpm (56 lbs of O2/hr.)

KEY FEATURES


- Eliminate Wastewater Surcharges/Fees
- Eliminate H2S Corrosion, Gas and Odors
- Solids and Sludge Buildup
- BOD and TSS Reduction
- Maintain Required DO Levels

APPLICATIONS


- Aeration Basins/Tanks
- Lagoons
- Sequential Batch Reactors
- Lift Stations
- Pretreatment
- EQ Tanks
- Biological Reactors




COST / EFFICIENCY

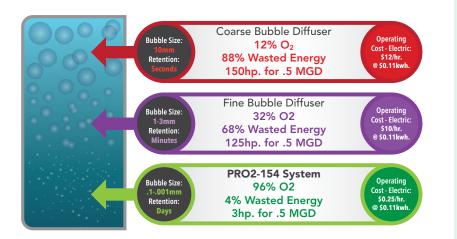

The PrO2 System produces far more dissolved oxygen than the top performing Aeration Systems on the market for 1/50th of the energy cost!



OPERATING RANGE



pН

REMOTE ACCESS & MONITORING VIA SMART DEVICES

The PrO2 system can be controlled and monitored remotely through a cellular modem or the Internet. It is Smart Phone, Tablet, Laptop and PC accessible, with a SCADA connection for integrated monitoring.



OUTPUT

2-140 Gallons per Minute

*Multiple units may be run together to meet any volume requirement

TREATMENT CAPACITY

*Based on Biological Conditions, BOD, Flow and Retention Time

PrO2 154: to meet a 250 mg/L limit

- 13k gpd @ 5,000 mg/L BOD
- 6.5k gpd @ 10,000 mg/L BOD

PrO2 804 : to meet a 250 mg/L limit

- 70k gpd @ 5,000 mg/L BOD
- 35k gpd @ 10,000 mg/L BOD

PrO2 1408: to meet a 250 mg/L limit

- 130k gpd @ 5,000 mg/L BOD
- 65k gpd @ 10,000 mg/L BOD

OXYGEN DELIVERY

PrO2 154: 6 lbs./hr. @ 70° F (21.1° C)

PrO2 804: 32 lbs./hr. @ 70° F (21.1° C)

PrO2 1408:

56 lbs./hr @ 70° F (21.1° C)

PURCHASE OPTIONS

Purchase, rental or long term lease



www.hansonsg.com

(612) 290-3893