

SOUNDZ BAGGER AUDIO

6.75" REAR SPEAKER KIT

GENERAL

Models

2014-2020 ALL Models with a King Tour Pack & HD# 76000505 or Soundz # SC-TPPD.

NOTE

The speakers in this kit are for use **ONLY** on specific 2014 and later Harley-Davidson audio systems.

Using these speakers on 2013 or earlier Harley-Davidson audio systems **will require additional parts**.

Installation Requirements



WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Soundz dealer perform the installation. Improper installation of this kit could result in death or serious injury.

NOTE

This instruction sheet refers to service manual information. A service manual for this year/model motorcycle is required for this installation. One is available from a Harley-Davidson dealer.

Kit Contents

See [Figure 1](#) and [Table 1](#).

PREPARATION

NOTE

For vehicles equipped with security siren: With security fob present, turn ignition switch ON.



WARNING

To prevent accidental vehicle start-up, which could cause death or serious injury, remove main fuse before proceeding. See the service manual to remove the main fuse. Turn ignition switch OFF.

INSTALLATION

1. Remove four screws retaining the speaker grille and speaker from one rear speaker enclosure.
2. Remove the speaker and grille from the enclosure. Disconnect the terminals from the back of the speaker.
3. Repeat steps 1-2 to remove the remaining speaker.
4. Attach the speaker wire connectors inside the speaker enclosure to the spade terminals on the back of the **new** speaker. Different size spade contacts prevent improper assembly.

5. See [Figure 1](#). Rotate the speaker assembly (1) so the tweeter bridge (C) is 45 degrees outboard from the top. Verify that the downward-facing hole (D) in the speaker frame is marked "A" on the left side **of the vehicle**, "B" on the right side.

NOTE

Verify proper orientation of the Soundz emblem before proceeding.

6. Install the speaker and speaker grille (2) from the kit onto the speaker enclosure with the four screws removed earlier.

- Tighten screws carefully. Over-tightening screws can cause well nuts to pull through mounting holes.
- Use a crosswise pattern to tighten all four screws to 0.34–0.45 NM (3–4 **in-lbs.**).

7. Repeat steps 1-6 for the remaining rear speaker enclosure.

COMPLETION

NOTE

To prevent possible damage to the sound system, verify that the ignition is OFF **before** installing the main fuse.

1. See the service manual to install the main fuse.
2. Turn the ignition ON, but do not start the motorcycle.
3. Refer to the PREMIUM SOUND SYSTEM section of the owner's manual and turn the radio ON. Make sure that all speakers are working, and front/rear fader function is operating correctly (ONLY ON MODELS WITH A DSP INSTALLED-WITHOUT A DSP THIS WILL NOT FUNCTION AND IS NORMAL). If not, check speaker wiring.



After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury.

4. See the service manual to install the seat.

IN USE

Avoid direct contact with speaker grilles by a pressure washer. Damage to speakers can result.

SERVICE PARTS

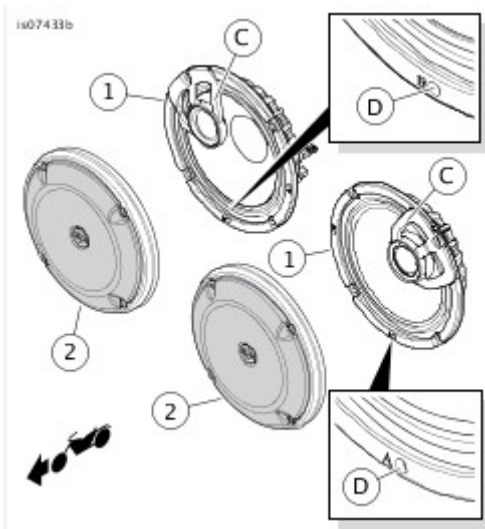


Figure 1. Service Parts, Soundz Bagger Audio 6.75" Rear Speaker Kit

Table 1. Service Parts

ITEM	DESCRIPTION (QUANTITY)	PART NUMBER
1	Speaker assembly (2)	Street 65, Iron 61, Iron 65, Carbon65-s
2	Woofer grille (2) Spacers – 22mm(2) & Spacers – 6mm(2)	SC-6GTP, SC-TPLS, SC-6TPS
Items mentioned in text.		
C	Tweeter bridge	
D	Reference hole in speaker frame Marked "A" (left speaker), "B" (right speaker)	