

# **TRIMCO** MILLWORK

TRIMCO Millwork 1835 Commerce Ave. Boise, ID 83705

Phone: 208-336-9000 • Fax: 208-384-1658 Toll Free: 1-800-733-0312 • www.trimcomillwork.com

A Division of Hoff Companies, Inc.

## TABLE OF CONTENTS

BASE MOULDING	2–4
CASING MOULDING	5–6
CROWN MOULDING	7–8
HEADER, CHAIR RAIL, DOOR STOP AND PANEL MOULDING	9–10
S4S MOULDING	11–12
MISCELLANEOUS MOULDING	13–16
MOULDING ACCESSORIES	17–27
JAMBS AND FRAMES	28
CUSTOM BUILD-UPS	29–34
DOORS	35
PORCH POSTS	36

## Our Mission...

To be the first choice supplier for our customer's millwork and finish products needs.

Our skilled employees, each with a desire to excel, will provide quality products at competitive prices and deliver superior service to build lasting relationships with customers and vendors.

## BASE MOULDING PROFILES



• F] = Finger Joint • FJP = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF UL = MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber WI + L L W 0 R K

## **BASE MOULDING PROFILES**

## BASE MOULD

TM 003	11/16 x 3-1/2	KA RL	TM	620 9/16	5 x 4-1/4 <b>FJ</b> 1	16'	
TM 412	9/16 x 4 -1/2 9/16 x 4 -1/4	FJ 16' H RL [	KA RL	TM 640	9/16 x 4-1/2	FJ 16'	
TM 145	9/16 x 5	MDF 16'					
TM 1215	1/2 x 5-1/8	KA RL					
TM 004	11/16 x 5-1/4	KA RL					
TM 218	9/16 x 5-1/4	MDF 16' KA RL					
TM 603	1/2 x 5-1/4	MDF 16'					
TM 618	9/16 x 5-1/4	FJ 16' KA RL	MDF 16'				
		v Vary Depending On Woo				-	




## BASE MOULDING PROFILES

BASE MO	DULD		
TM 929 1/2 x 5-1/2	/DF 16'	TM 566 5/8 x 5-1/2 ा	DF 16'
TM 359 1/2 x 5-1/2	<b>₩DF</b> 16′		
TM 677 9/16 x 5-3/4 🛛	MDF 16'		
TM 512 9/16 x 5-7/8	FJ 16' KA RL MDF 16'		
TM 680 5/8 x 5-7/8 №	<u>/DF</u> 16′		
TM 360 1/2 x 7-1/4 ाм	<b>DF</b> 16'		
TM 163 9/16 x 7-1/4	MDF 16'		
TM 366 1/2 x 11-1/4 Note: Actual Profile Sizes May Var			

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LM = Laminated Veneer Lumber

## CASING MOULDING PROFILES

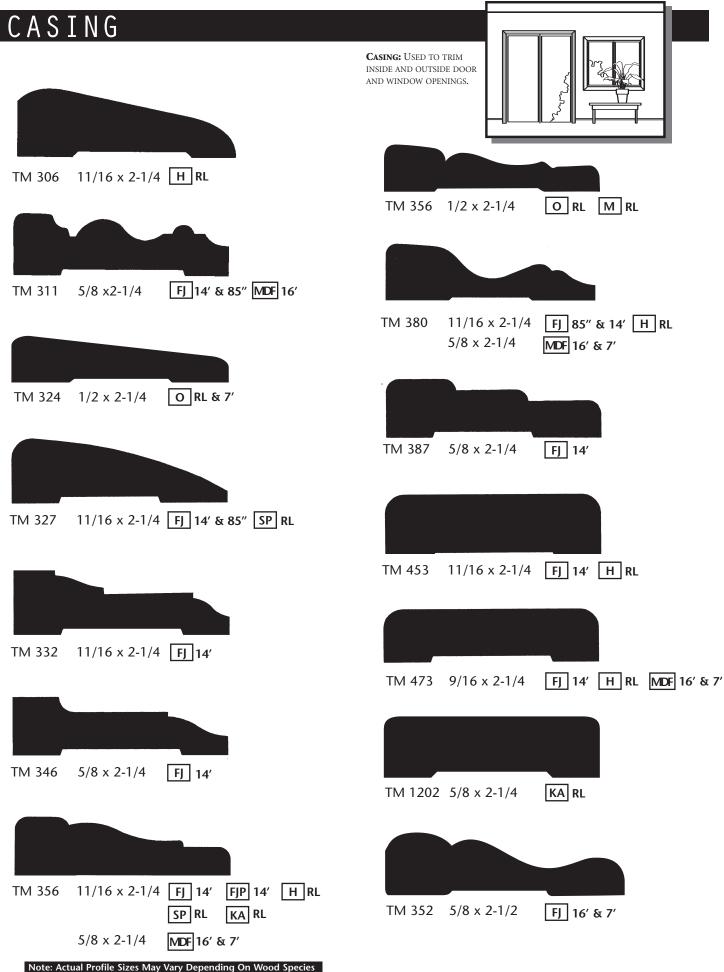


• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed

• MDF = Medium Density Floetboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber




#### CASING MOULDING PROFILES

CASING

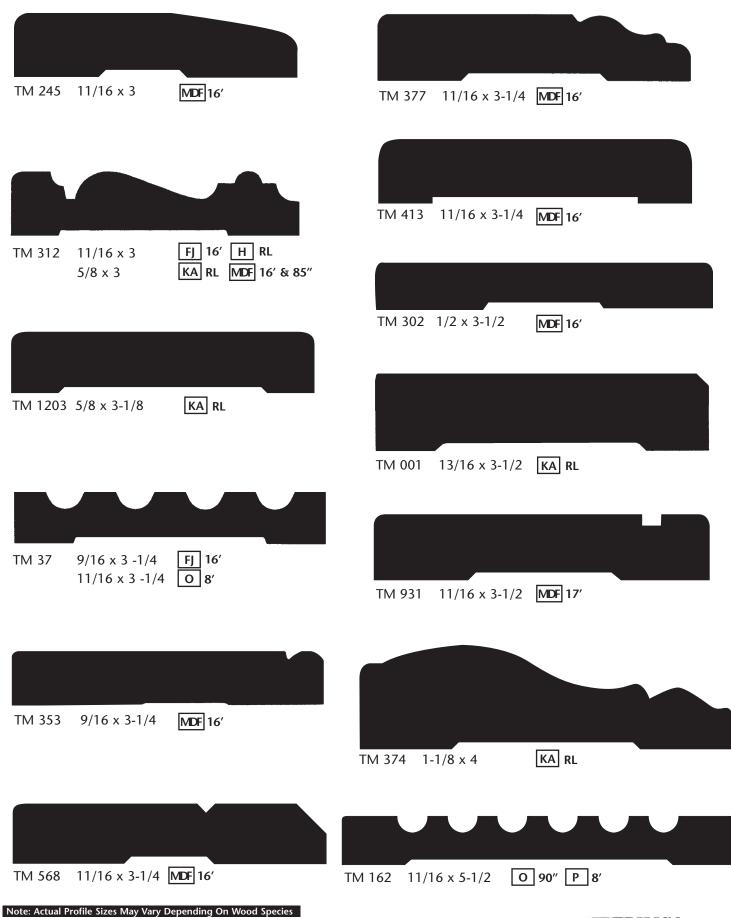

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF=Medium Density Floetboard • MDF-UL=MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LM = Laminated Veneer Lumber 6

TRIMCO

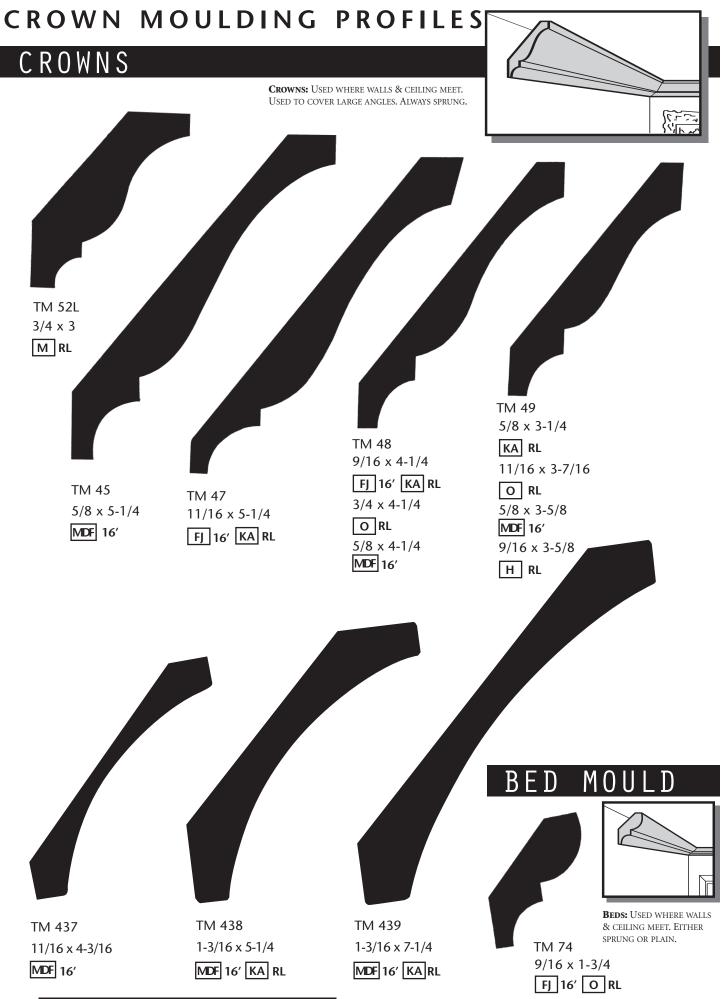


Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LUL = Laminated Veneer Lumber

**ŢŖ**Į**MĊŎ** 


#### **CROWN MOULDING PROFILES**

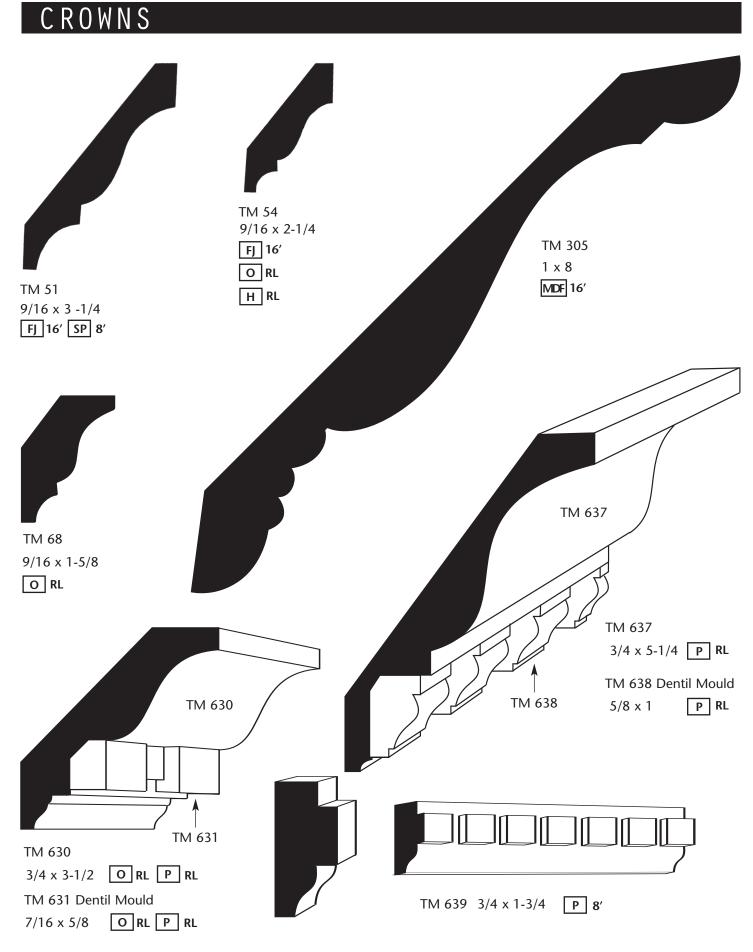

Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • F]P = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak • Nene • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LM = Laminated Veneer Lumber

#### HEADER MOULDING PROFILES

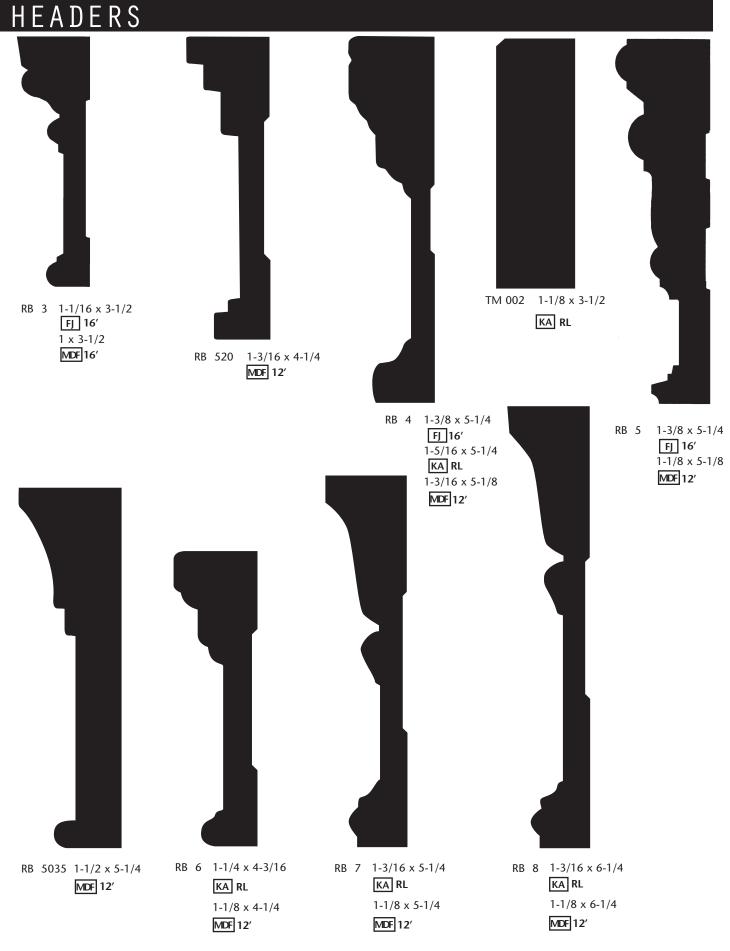


Note: Actual Profile Sizes May Vary Depending On Wood Species


• 1] – THINGET JUNIL • THY = THINGET JOINT PRIMED • H = Hermlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Clear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hermlock • LVL = Laminated Veneer Lumber


## CHAIR RAIL PROFILES

#### CHAIR RAILS

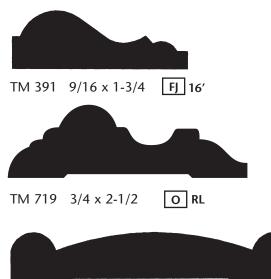

CHAIR RAIL: INTERIOR MOULDING APPLIED ABOUT ONE THIRD UP FROM THE FLOOR, PARALLELING BASE MOULDING AND ENCIRCLING THE ROOM. ORIGINALLY USED TO PREVENT CHAIRS FROM MARRING WALLS. USED TODAY AS A KEY DECORATIVE DETAIL IN TRADITIONAL AND COLONIAL DESIGN.



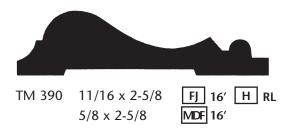



TM 304 5/8 x 3 FJ 16' KA RL MDF 14'

#### DOOR STOP PROFILES




**DOOR STOPS:** IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS.



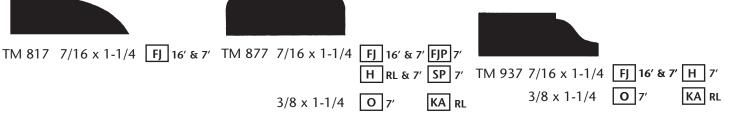

#### PANEL MOULDING PROFILES

PANEL MOULD

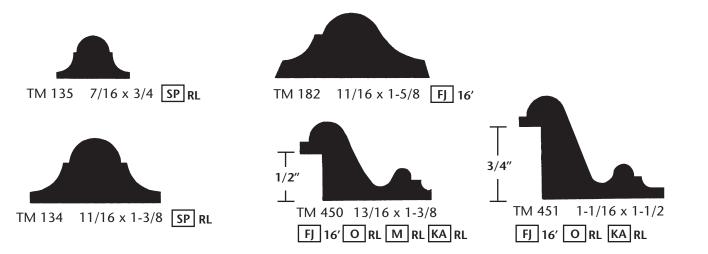


Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Chemy • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber

#### **S4S STOCK MOULDING PROFILES**

#### S 4 S STOCK

SCREEN/S4S STOCK: SAME BASIC USES AS SQUARES.







S4S1x2

MDF 17'


MDF 16'

KA RL

3/4 X 1-5/8

3/4 X 1-1/2

11/16 X 1-1/2





FJ 16' 11/16 x 1-3/4 H 16' 3/4 X 1-1/2 0 16'





S4S1x5 11/16 x 3-1/2 11/16 x 4-9/16 FJ 16' H RL VGH RL FJ 16' H RL 3/4 X 4-11/16 3/4 x 3-1/2 KARL SARL ORL MDF 17' 11/16 x 4-11/16 MDFUL 16' 11/16 X 3-1/2 3/4 x 3-1/2

S4S1x6 11/16 x 5-1/4 FJ 16' 3/4 x 5-1/2 KA RL SA RL MDF 17' O RL 11/16 x 5-1/2 MDFUL 16' H RL VGH RL 3/4 x 5-1/2 P RL

Note: Actual Profile Sizes May Vary Depending On Wood Species

S4S1x3

MDFUL 16'

11/16 x 2-1/2

S4S1x3

FJ 16'

11/16 x 2-3/4

• F] = Finger Joint • F]P = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Chemy • PRM = Primed • MDF = Medium Density Floetboard • MDF-UL = MDF-Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber 11

S4S1x4


MDF 17'

MDFUL 16'

P RL

#### **S4S STOCK MOULDING PROFILES**

#### S4S STOCK

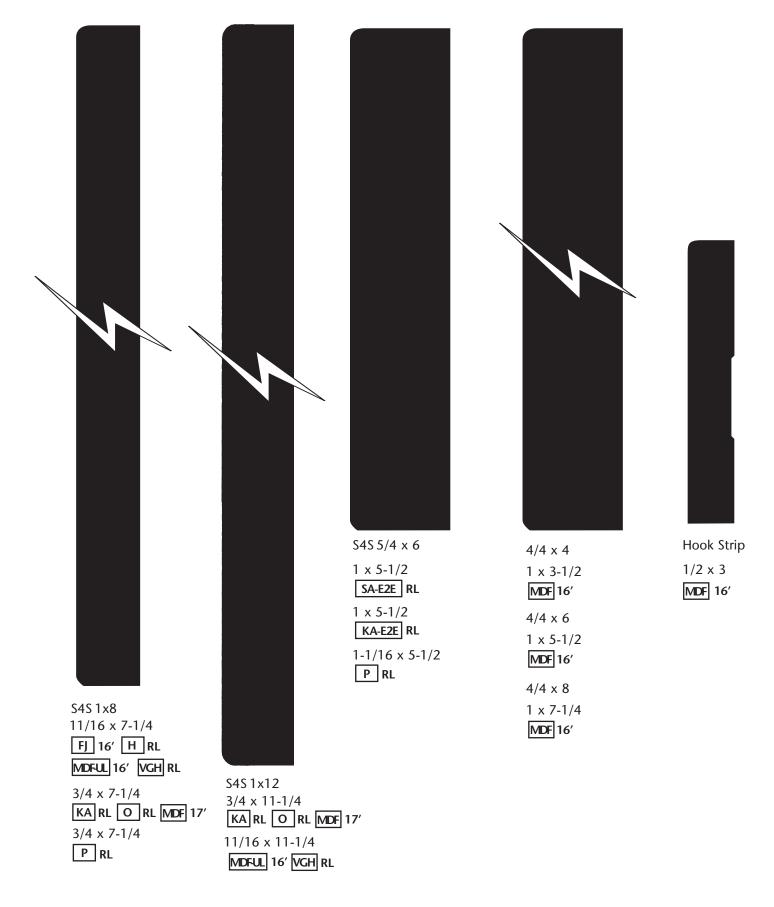


Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak • Neneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Larninated Veneer Lumber

#### CHAMFER STRIP




**CHAMFER STRIP:** USED IN HIGHWAY AND DAM CONSTRUCTION FORMS, MAKING A CHAMFERED EDGE AT CONCRETE CORNERS. ALSO USED WHERE KITCHEN CABINET TOPS MEET THE WALL. ALSO USED AS A LINOLEUM COVE (UNDER LINOLEUM WHERE IT EXTENDS UP THE WALL.)



TM 995 11/16 x 11/16 SP RL

#### BRICK MOULD

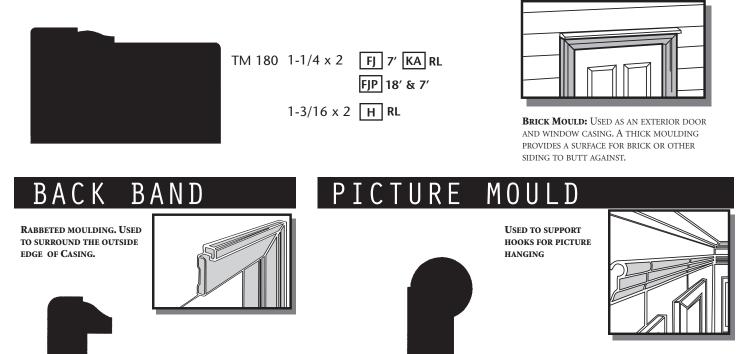


TM 273 11/16 x 1-3/4 H RL

BASE CAPS

TM 281 11/16 x 1-1/8


FJ 16'

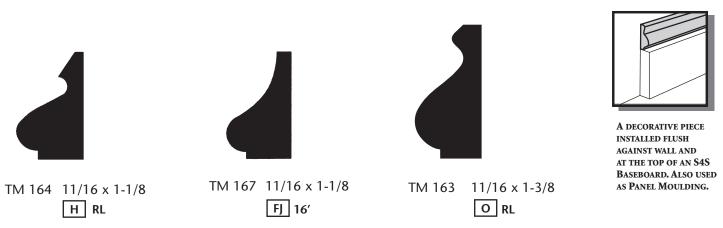

Note: Actual Profile Sizes May Vary Depending On Wood Species


13 •F] = Finger Joint •F]P = Finger Joint Primed • H = Hernlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed •MDF = Medium Density Floerboard • MDF-UL=MDF Ultralite • KA= Knotty Adder • CA = Clear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hernlock • LVL = Laminated Veneer Lumber

TRIMCO

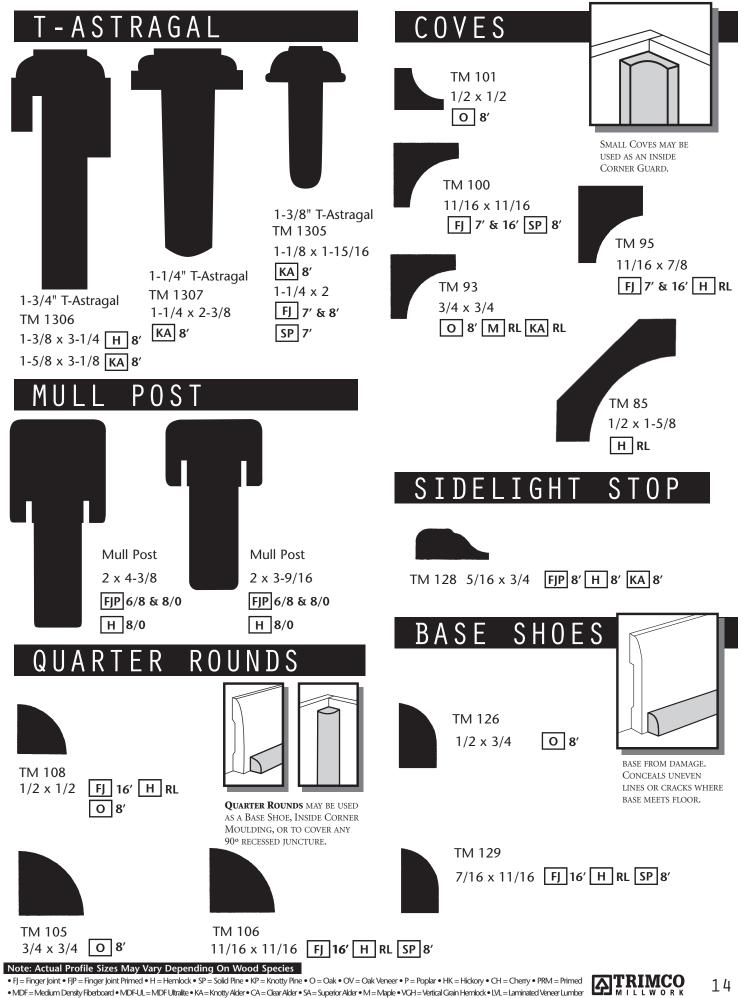

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hernlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hernlock • LVL = Laminated Veneer Lumber

#### SHELF EDGE/SCREEN MOULD

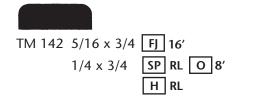

TM 144 1/4 x 3/4 H RL


SCREEN MOULD: COVERS SEAM WHERE SCREENING IS FASTENED TO THE SCREEN FRAME.

SHELF EDGE: ALSO COVERS PARTICLE OR


FLAKEBOARD SHELF

EDGES.














AS A HAND SUPPORT




TM 231 1-1/2 x 1-11/16 H 16' PRM 16' & 18' TM 240 1-1/4 x 2-1/4 H RL

#### CORNER GUARDS







**CORNER GUARDS:** OUTSIDE (OS) CORNER GUARD IS USED TO PROTECT CORNERS OR TO COVER RAGGED EDGE WHERE WALL COVERING AND PAINTED SURFACES MEET AT OUTSIDE CORNER.



L ROUND

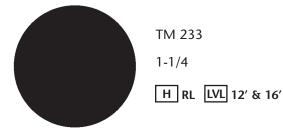

ROUNDS: MOST OFTEN USED AS A CLOSET POLE OR ROOM DIVIDER.



Note: Actual Profile Sizes May Vary Depending On Wood Species

• FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cheny • PRM = Primed

15 • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LML = Laminated Veneer Lumber



#### CORNER MOULD

Universal Corner Mould used for radius corners.




TM 803 3/4 x 1-13/16 SP RL

#### COUNTER EDGE



TM 435 9/16 x 1-1/2

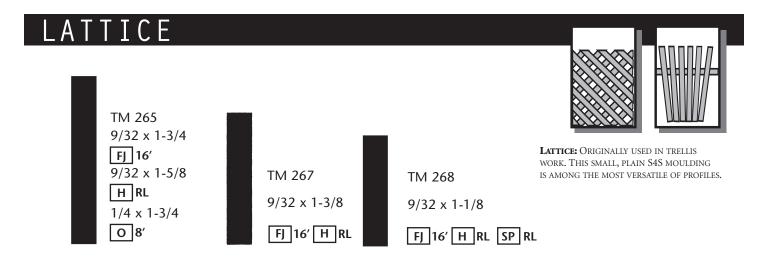

Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LM = Larminated Veneer Lumber



#### SHELVING & SHEET GOODS

## SUPER SHELF


DESCRIPTION	SIZE
#45 Super Shelf — 3/4"	12″ X 97″
#45 Super Shelf — 3/4"	12″ X 145″
#45 Super Shelf — 3/4"	16″ X 97″
#45 Super Shelf — 3/4"	16″ X 145″
#45 Super Shelf — 3/4"	24″ X 145″

COUNTERTOP	
DESCRIPTION	SIZE
#45 Countertop — 3/4"	25″ X 145″

MDF SHEET STOCK				
THICK	SIZE			
1/4″	49″ x 97″			
1/2″	49″ x 97″			
3/4″	49″ x 97″			
3/4″	49″ x 121″			


## BEAD BOARD


Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	1-1/2"
3/16" x 4' x 8'	Primed	2"




Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	3"

## V - G R O O V E





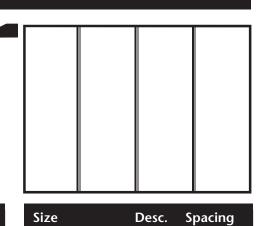

Desc.

Size	Desc.	Spacing		Size		Spacing
3/16" x 4' x 8'	Raw	4″		3/16" x 4' x 8'	Raw	6″
			•			

3/16" x 4' x 8' Raw

Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LML = Laminated Veneer Lumber




8″


## PANEL CAP



TM 292 9/16 x 1-1/8 FJ 16' H RL SP 8' KA RL 3/4 X 1-1/4 O 8'




PANEL/PLY CAP: TURNS OUT THE UPPER EDGE OR TOP OF A WAINSCOT. COVERS PLYWOOD'S ROUGH SANDWICH EDGE IN INSTALLATIONS WHERE IT IS EXPOSED TO VIEW. ALSO CALLED A DADO CAP.

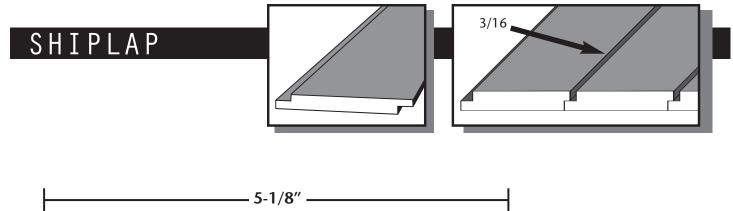



SL 1X6 5/8 x 5-1/2

MDF 16'

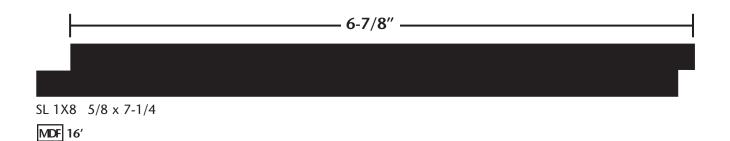

Note: Actual Profile Sizes May Vary Depending On Wood Species

**:0** 18

#### MOULDING R

#### PRICING CALL FOR

#### SPECIAL ORDER

#### How to Determine Flexible Moulding Length

#### **HOW TO ORDER:** TRUE RADIUS ROUND TOP HALF CIRCLE CASING

To order this type of product simply:

- 1. Determine diameter dimension (distance across inside width of circle)
- 2. Determine radius dimension (half of diameter dimension)
- 3. Multiply diameter dimension times 2 to calculate length
- 4. Round length up or down to nearest even footage Example: diameter  $2/4 \ge 2 = (28'') \ge 2 = 56''$  round to 5 ft.

#### HOW TO ORDER: TRUE RADIUS FULL CIRCLE CASING

To order this type of product simply:

- 1. Determine diameter dimension (distance across inside width of circle)
- 2. Verify that half of the diameter dimension is the radius dimension
- 3. Multiply diameter dimension times 4 to calculate length
- 4. Round length up or down to nearest even footage Example: diameter  $26'' \times 4 = 104''$  rounded up to 9 ft.





#### To order this type of product simply:

- 1. Make a template that fits exact inside radius edge
- 2. Multiply rise times 3, add width, and round up to nearest even footage length



#### & TIMBER COLLECTION STONE

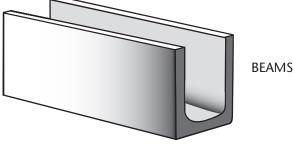







WIDTH

RISE



INSIDE

OUTBOARD RADIUS

WDTH



FLEX DIAMETER-WIDTH


Flex Trim is curved lona like

this on both ends



7/1/2020

#### PLINTH BLOCKS BULLSEVE DESIGN

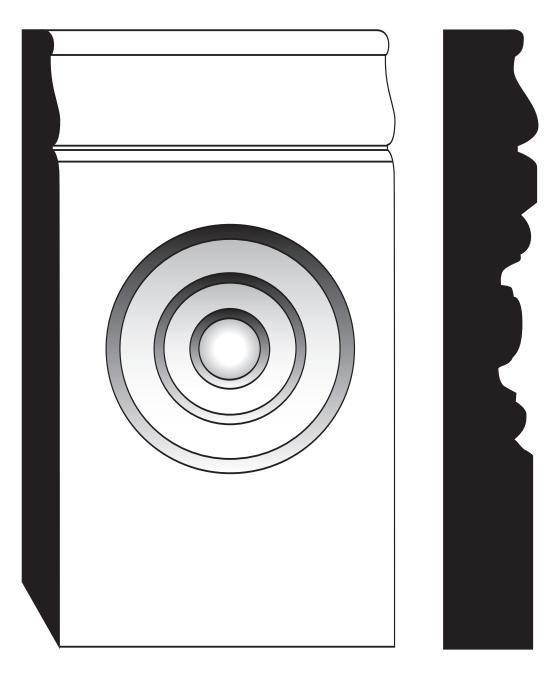


1 x 3-1/2 x 6-1/2 MDF

Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FIP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak • Pereore • P = Poplar • HK = Hickory • CH = Chemy • PRM = Primed • MDF=Medium Density Fiberboard • MDF-UL=MDF Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber 20



## PLINTH BLOCKS

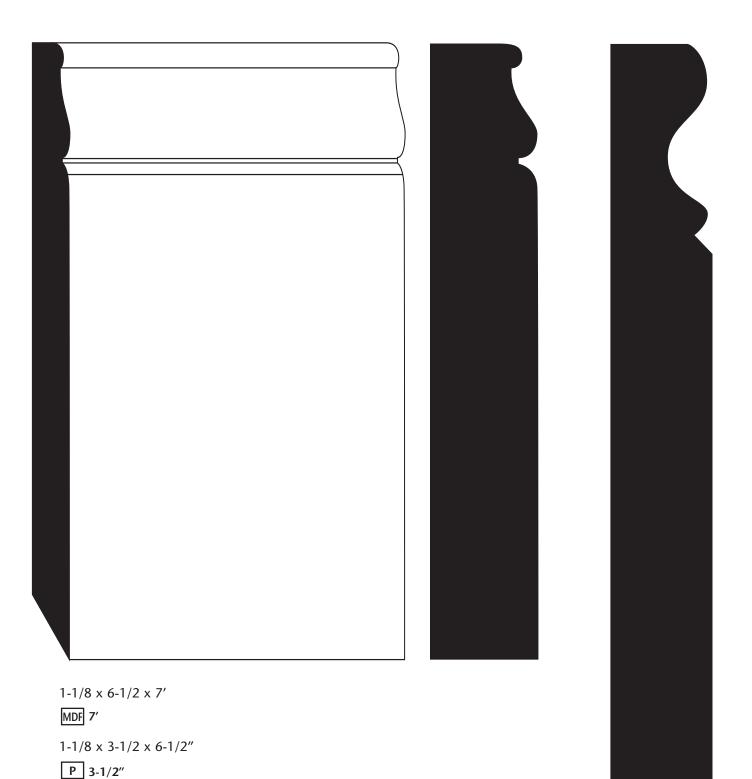


1-1/16 x 7-7/8

Note: Actual Profile Sizes May Vary Depending On Wood Species


• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak • Neneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF=Medium Density Floerboard • MDF-UL= MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LM = Laminated Veneer Lumber

#### CORNER BLOCKS BULLSEVE DESIGN

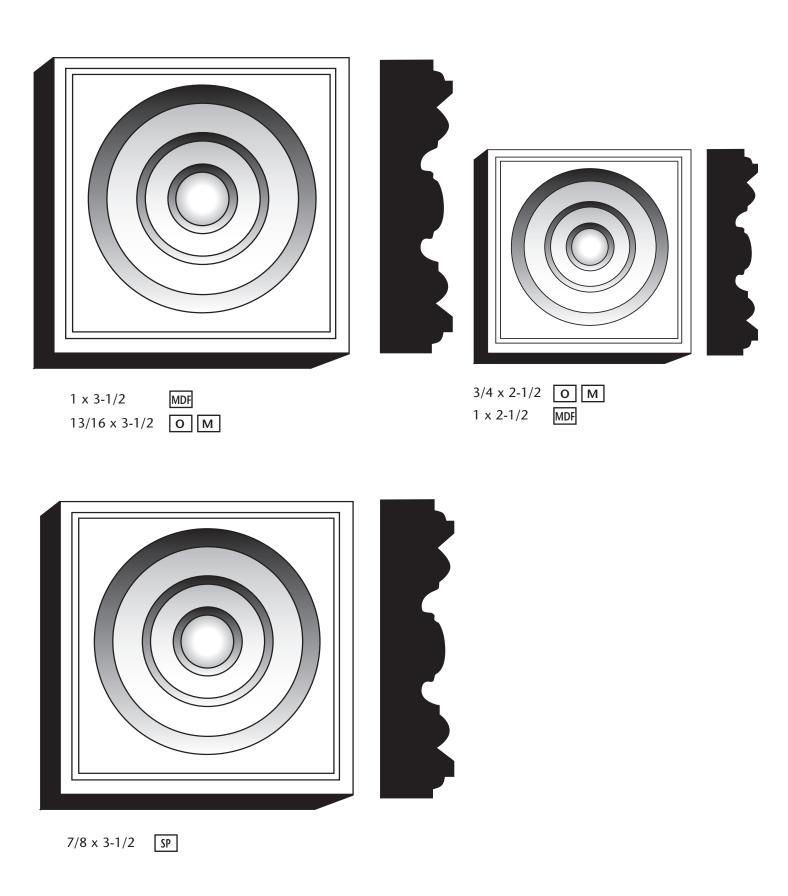

#### Note: Actual Profile Sizes May Vary Depending On Wood Species



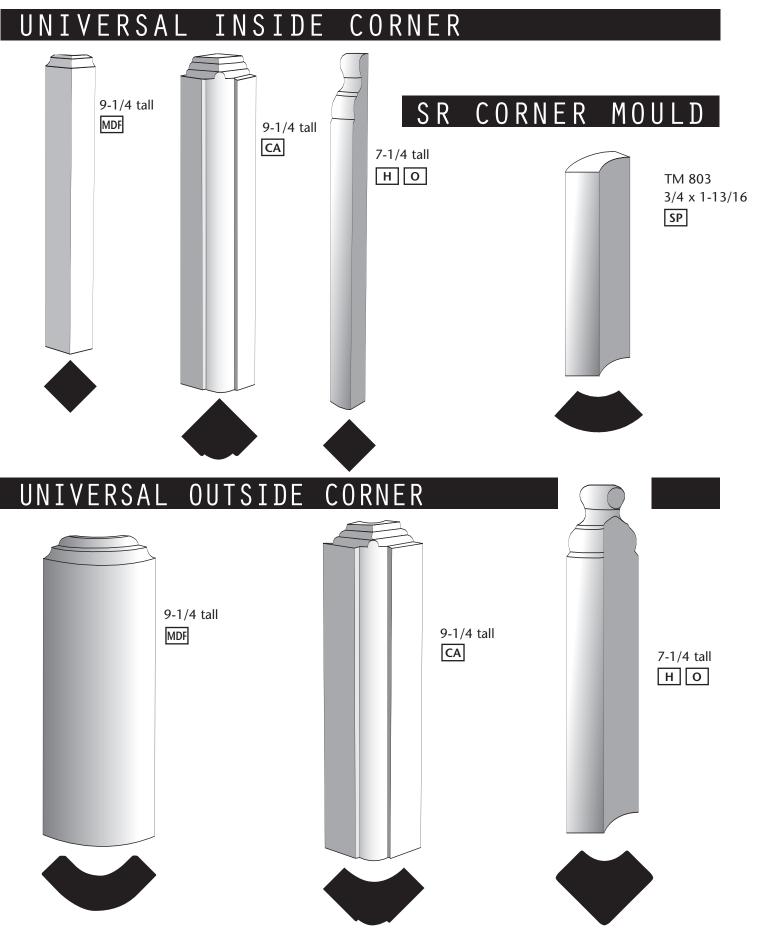


Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • F]P = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak • Neneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LM = Laminated Veneer Lumber

## RADIUS CORNERS TM 356 5/8 x 2-1/4 MDF 11/16 x 2-1/4 H TM 411 H MDF TM 444 11/16 x 3-1/4" Н 9/16 x 3-1/4" 5/8 x 3-1/4" MDF TM 312 H 11/16 x 3" TM 730 H MDF TM 852 H TM 623 H MDF TM 412 9/16 x 4-1/2" | H | 9/16 x 3-1/4" 9/16 x 3-1/4" 9/16 x 4-1/4" 9/16 x 3-1/4 MDF

Note: Actual Profile Sizes May Vary Depending On Wood Species • F] = Finger Joint • F]P = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Floerboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber


## RADIUS CORNERS

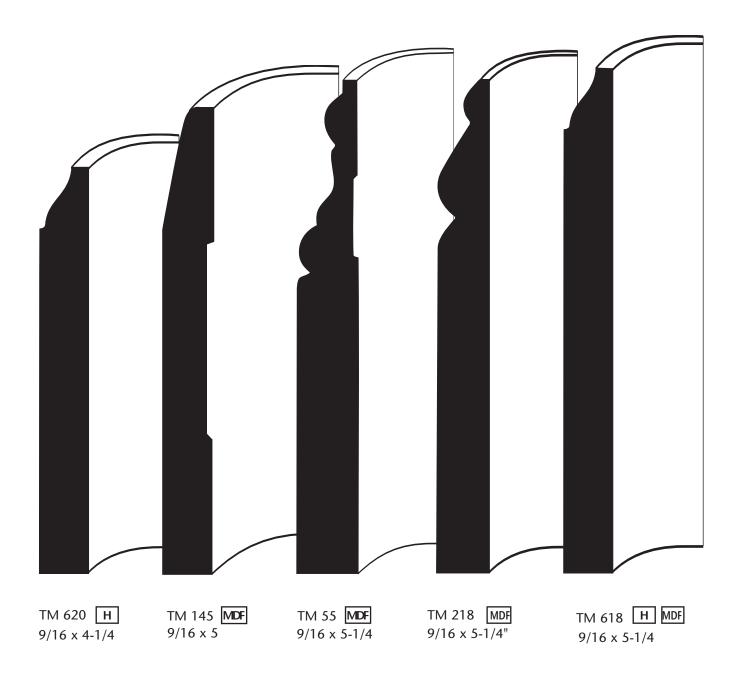

Note: Actual Profile Sizes May Vary Depending On Wood Species

• FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fiberboard • MDF-UL=MDF-Ultraite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LL = Laminated Veneer Lumber

## RADIUS CORNERS

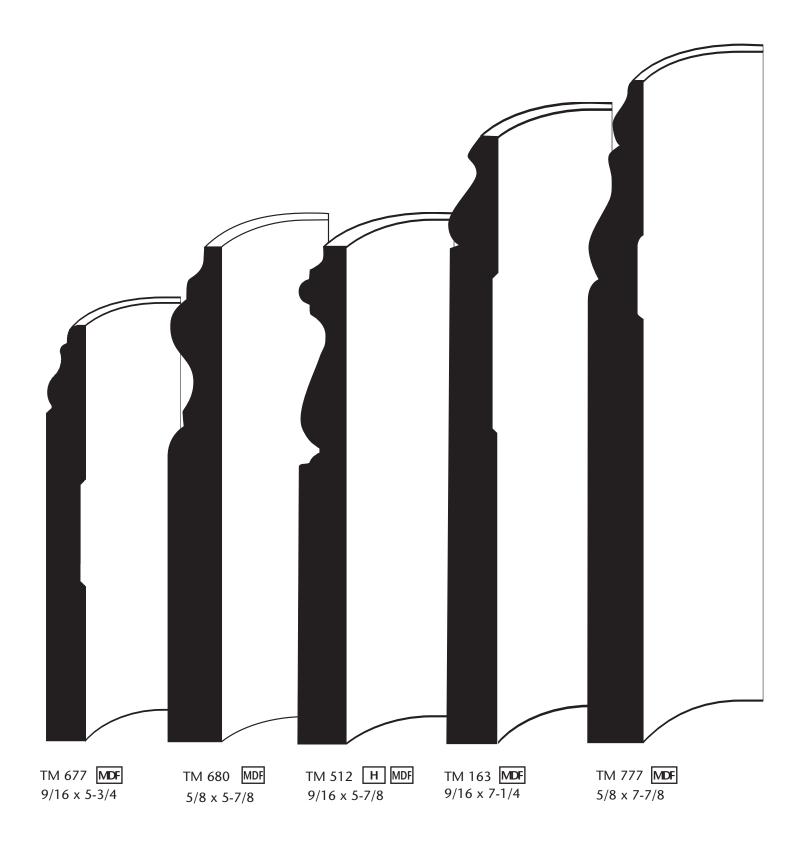

Note: Actual Profile Sizes May Vary Depending On Wood Species

• FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF=Medium Density Fiberboard • MDF-UL=MDF Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Larninated Veneer Lumber



## TRIM-FIT MDF CROWN CORNERS PRE-MANUFACTURED CROWN CORNERS

#### EASY INSTALLATION

Measure wall from corner to corner and subtract the appropriate crown dimension listed below from measurement:

#### **CUTBACK FOR EACH**

Inside Corner






Trim-Fit #	Crown Width	Inside Corner	Outside Corner
TM49	3-5/8"	3"	5/8"
TM48	4-1/4"	3-1/4"	5/8"
TM45	5-1/4"	4"	5/8"
TM329	6-5/16"	5"	5/8"

Outside Corner

Keystone (Splice Cover)

#### TRIM-FIT<sup>™</sup> Crowns are manufactured to fit the following TRIMCO profiles:

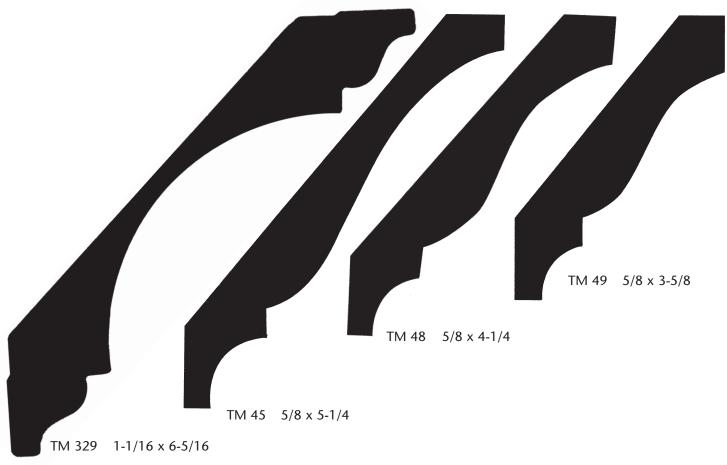

Note: Actual Profile Sizes May Vary Depending On Wood Species

• F] = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRM = Primed • MDF = Medium Density Fberboard • MDF-UL = MDF Ultralite • KA = Knotty Adder • CA = Gear Adder • SA = Superior Adder • M = Maple • VCH = Vertical Grain Hemlock • LM = Larminated Veneer Lumber

## INTERIOR JAMBS & EXTERIOR FRAMES

#### **Interior Flat Jamb**



#### Kerf Flat Jamb



3-1/2 FLAT JAMBS W/SHEETROCK KERF	82-1/4"	86-1/4"	98-1/4"
FJ RAW	Х		Х
4-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	х		Х
FJ PRIMED	Х		
KNOTTY ALDER	Х		Х
HEMLOCK SOLID	Х		
HEMLOCK VENEER	Х		
SOLID PINE	Х		
OAK VENEER-LUAN Substrate	Х		
MDF MEDITE PRIMED	Х		
4-7/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×		х
HEMLOCK SOLID	Х	X	
OAK VENEER-LUAN Substrate	Х		
SOLID PINE			Х
KNOTTY ALDER	х		×
5-1/4 FLAT JAMBS	82-1/4"	86-1/4"	
FJ RAW	х		
HEMLOCK SOLID	х		
6-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	х	х	х
HEMLOCK SOLID	х		х
KNOTTY ALDER	Х		Х
SOLID PINE	Х		
7-1/4 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	Х		
HEMLOCK SOLID	Х	×	
KNOTTY ALDER			Х

# Exterior Blank

#### **Exterior SCSK**



1-1/4 X 4-5//8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW BLANK		х				
HEMLOCK SOLID SCSK		х				
FJ PRIMED BLANK	х				х	
KNOTTY ALDER SK			х			
1-1/4 X 4-3/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х				
1-1/4 X 4-7/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW BLANK				х		
1-1/4 X 5-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		х				
FJ RAW SK						х
FJ RAW BLANK		Х				х
HEMLOCK SOLID SCSK		Х				
HEMLOCK SOLID SK						х
HEMLOCK SOLID BLANK		х				
1-1/4 X 6-5/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х				х
FJ PRIMED BLANK	Х	Х			Х	
HEMLOCK SOLID SCSK		Х				Х
HEMLOCK SOLID BLANK		Х				
KNOTTY ALDER SK			х			х
1-1/4 X 7-1/4 EXTERIOR FRAMES (2-14" Thick Doors)	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
KNOTTY ALDER SK						х
1-1/4 X 7-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		х				
FJ RAW SK						х
FJ RAW BLANK		х				
HEMLOCK SOLID SCSK		х				
HEMLOCK SOLID SK						х
HEMLOCK SOLID BLANK						х
KNOTTY ALDER SK						х
1-1/4 X 8-1/2 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SK				Х		х
HEMLOCK SOLID SK						х
KNOTTY ALDER SK						х


\* SCSK = Sill Cut/Saw Kerf

SK = Saw Kerf


FJP = Finger Joint Prime




#### MOUNTAIN HERITAGE

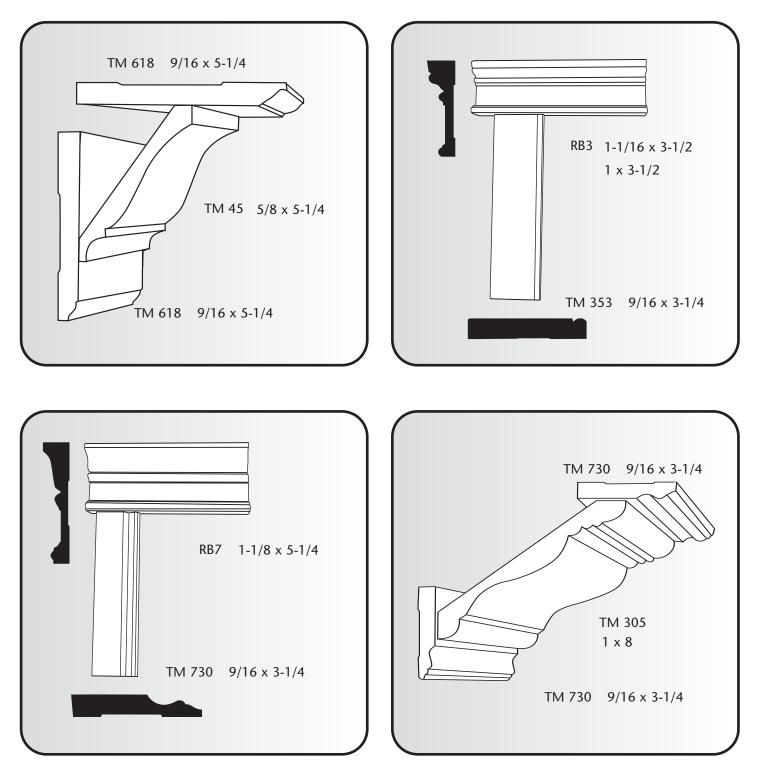




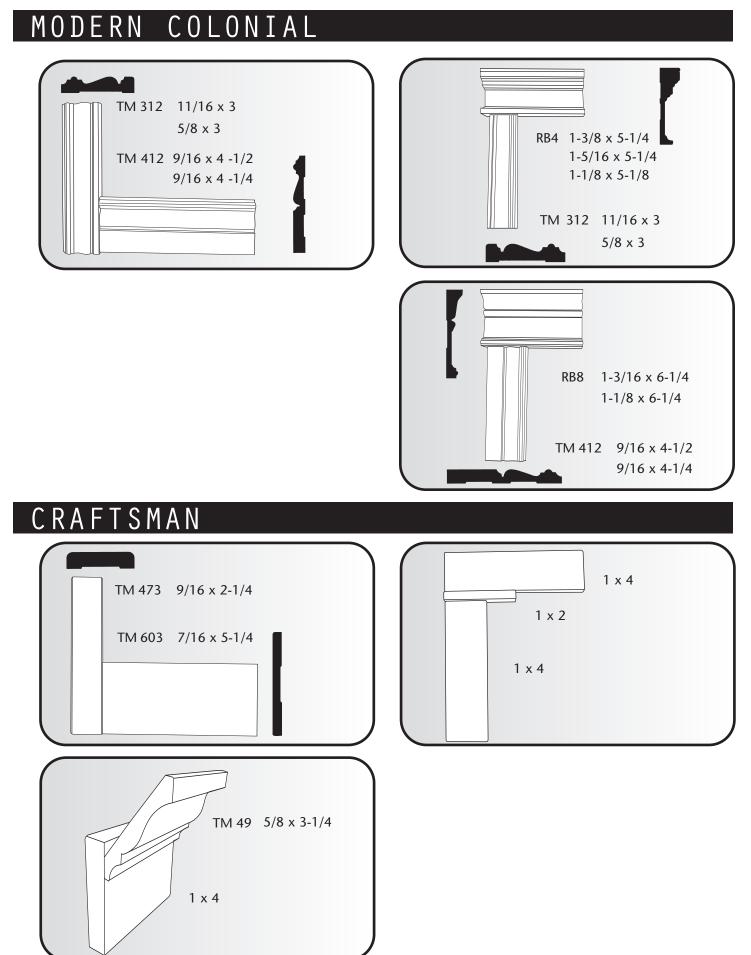

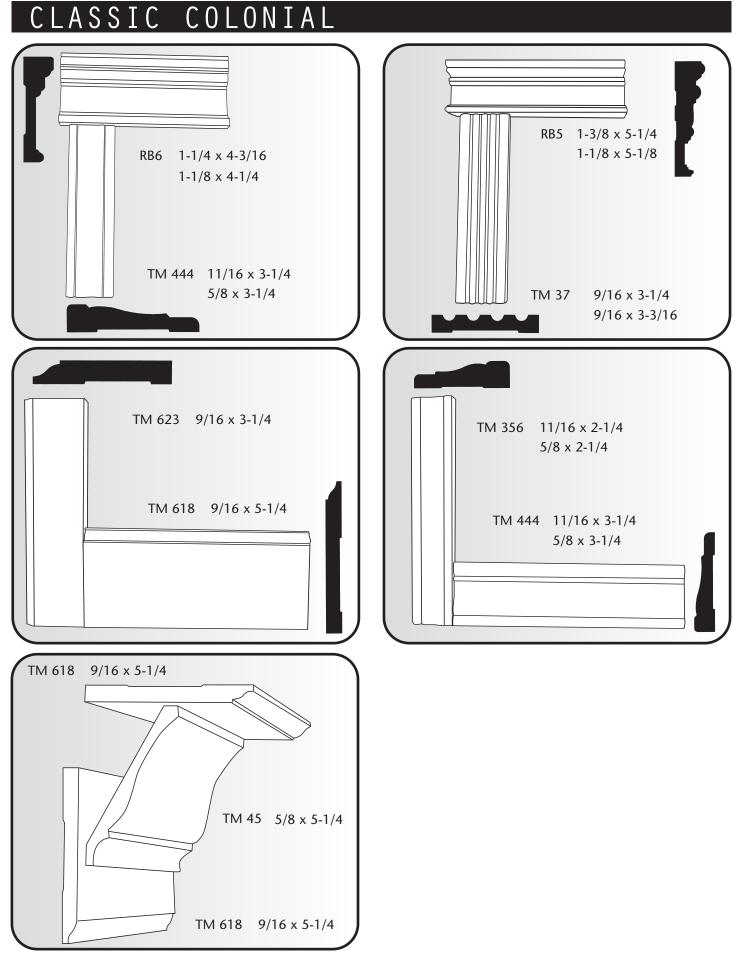


## CONTEMPORARY TM 245 11/16 x 3 RB5 1-3/8 x 5-1/4 1-1/8 x 5-1/8 TM 145 9/16 x 5 TM 304 5/8 x 3 TM 377 11/16" x 3-1/4" RB8 1-1/8 x 6-1/4 TM 48 5/8 x 4-1/4 TM 377 11/16" x 3-1/4" TM 377 11/16" x 3-1/4" TM 377 11/16" x 3-1/4" TM 677 9/16 x 5-3/4


## PRE-MANUFACTURED CROWN CORNER BUILD-UPS

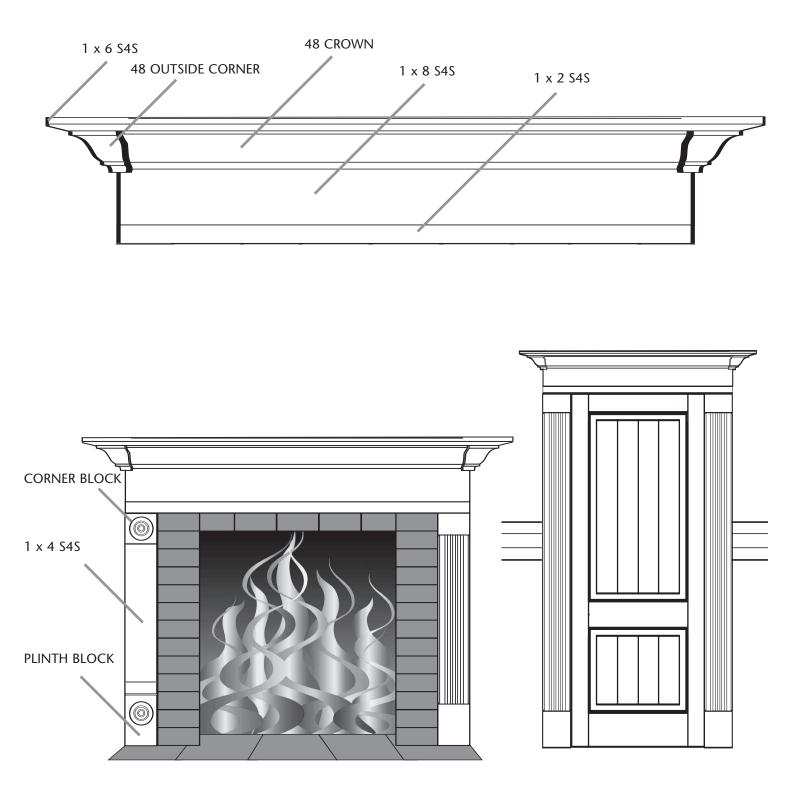




#### CUSTOM BUILD-UPS

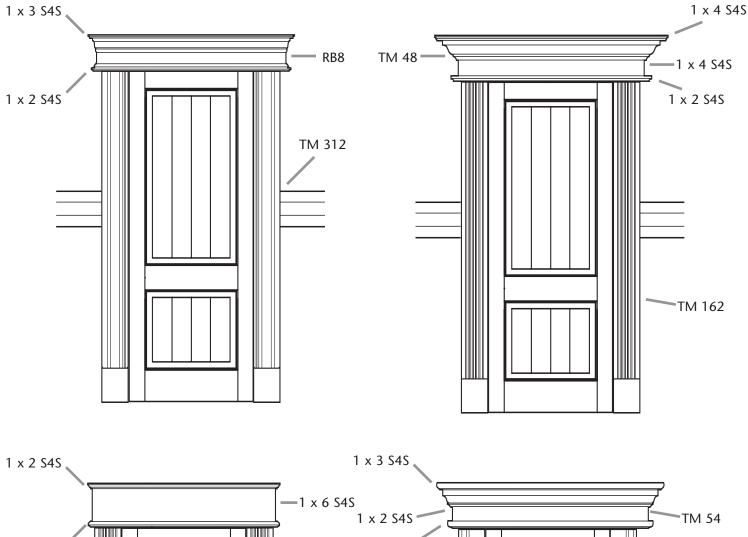

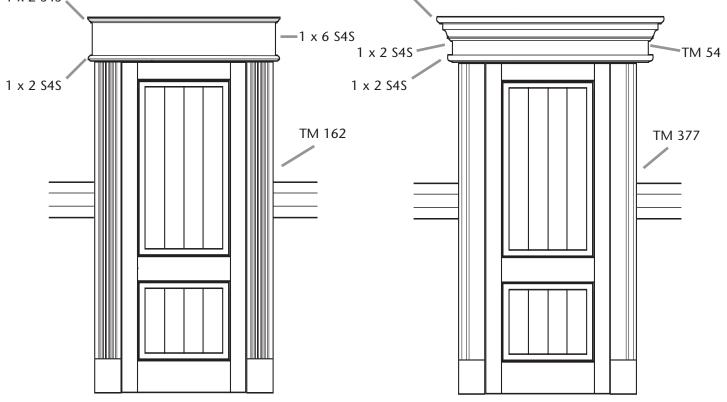


#### DOORS


## NDEN INTERIOR DOOR STYLES

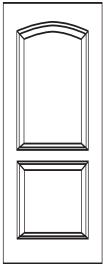


Rosario<sup>®</sup> (Caiman<sup>®</sup>) **S**MOOTH




COLUMBIA® (COLONIST®) **S**моотн

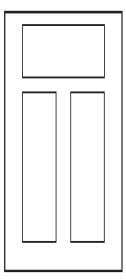


YARROW<sup>®</sup> (CRAFTSMAN<sup>®</sup>) **S**MOOTH



LOPEZ® (CASHAL®) **S**моотн




**BONNEVILLE®** (COLONIST<sup>®</sup>) TEXTURED

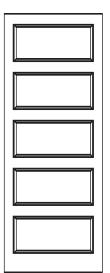


WINTHROP® (CONMORE®) **S**моотн


Lynden Door

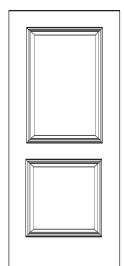


KINGSTON® (CARRARA®) **S**MOOTH

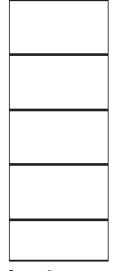


Denman® **S**моотн

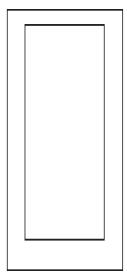


MERCER® (MADISON®) **S**моотн

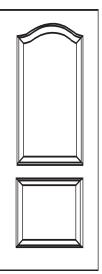

BLAKELY<sup>®</sup> (CLASSIQUE<sup>®</sup>) TEXTURED

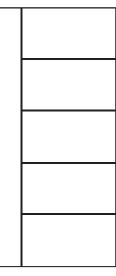


**A**lki<sup>®</sup>

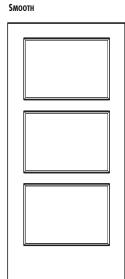


**Aberdeen**® **S**MOOTH



SAMISH® (CREMONA®) **S**моотн

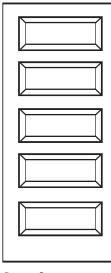

**Benton**<sup>®</sup> **S**моотн




**Whitman**® **S**MOOTH



#### PORCH POSTS

#### PORCH POSTS

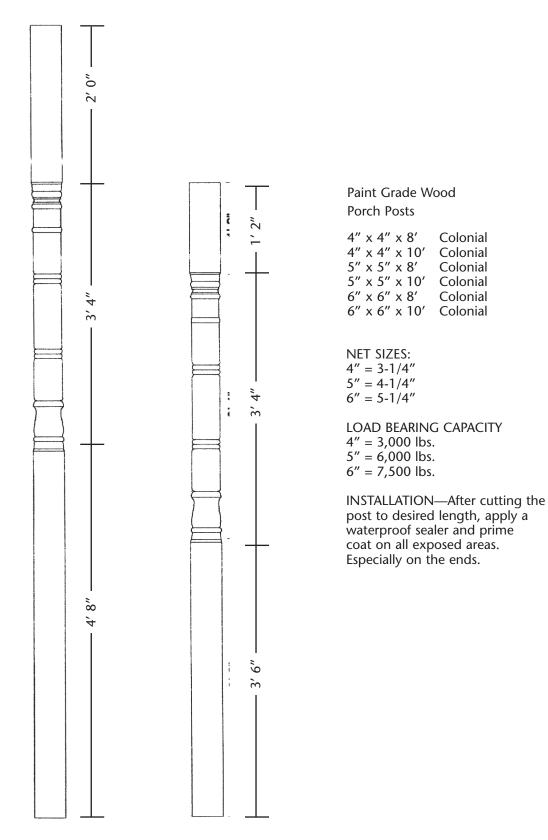



GRADE Wood mouldings are available in two grades. "N Grade" is intended for natural or clear finishes and the exposed face must be of one single piece. "P Grade" is intended for opaque paint finishes or overlays and can be finger jointed and or edge glued.

These grades may have a few minor characteristics such as light checks, small pitch pockets, light torn grain, occasional medium stain or a small amount of medium pitch. A serious combination of these is not admissible in any one piece. The number and extent of characteristics permitted varies as the area of the piece increases or diminishes.

N-GRADE (suitable for natural, stain, paint, or enamel finish). On the basis of net 2" face-12' long this grade will admit the following characteristics or their equivalent:

A. A small spot of torn grain, one foot of medium pitch, light skip in dressing on back, or B. One small and one very small pitch pocket, or C. One short, tight season check and a light snipe at one end, or D. Medium stain in occasional (10%) pieces for one third the area in an otherwise perfect piece.

Characteristics that will not show when piece is laid shall not be given the same consideration as characteristics elsewhere.

P–GRADE (paint or overlay grade) The same quality as N-Grade except stain is no defect. Glue joints (laminated or finger joints) must be precision machined and assembled with tight joints. Patching, filling or plugging is permitted providing a paintable surface results.

LENGTHS Random lengths shall be 3 to 20 feet in multiples of one foot. Not over 15% of any one item shall be under 8 feet. When computing the percentage of shorts in casing and stops, pieces 7' in length will be considered long lengths.

Specified lengths of cut to length window and door trim shall be graded as completely usable.

Finger and/or laminated jointed mouldings may be ordered in specified lengths with not over 15% trim backs permitted in any one item.

Specified Lengths We reserve the option to charge a 25% premium on specified lengths of items normally sold on a random length basis. This policy applies mostly to Solid Pine, Oak and Hemlock mouldings.

ADHESIVES Adhesives used in finger joints or laminations shall meet the dry used adhesive performance requirements of ASTM D-3110-82 (or latest revision) "Standard Specification for Adhesives Used in Non-Structural Glued Lumber Products."

In situations where a Wet-Use adhesive is required, it shall be so specified, acknowledged and invoiced.

BUNDLING shall be in accordance with the Standard Wood Moulding and Millwork Producers Association Schedule.

MANUFACTURING TOLERANCES Thickness and width + or - 1/32"

DEFINITIONS Definitions of characteristics permitted in wood mouldings shall be those of the National Grading Rules for softwood lumber.

Settlement Provisions In determining compliance with purchase specifications and of effecting settlement of invoices between buyers and sellers, each item of a shipment shall be considered as of the grade invoiced if upon re-inspection 95% thereof or more is found to be of said grade or better.



#### Green's the Thing

At Trimco Millwork, we're not just trying to conserve energy and reduce our own carbon footprint, we're taking green to the next level by offering the finest, environmentally responsible building materials available. We offer a wide range of products that are made from recycled materials or are recycleable, as well as products from manufacturers that support the green initiatives of the organizations you see on this page. We are constantly searching for and adding high quality, green products to our inventory.

#### Go Green

To make it easier for our customers to find greener building materials we have developed GO GREEN, a selection of products that are easier on the earth through their manufacture, performance or use. Our GO GREEN offerings can help you meet your green product requirements.

#### **Building Green With Trimco**

The products listed below are a sample of the Go Green products we offer at Trimco Millwork:

#### MOULDING

Masisa/Metrie - MDF Fred Tebb & Sons - Knotty Alder Ferche - Oak Sierra Pacific - Frames Brightwood - Hemlock, Solid Pine, & Finger Joint DOORS Therma Tru - Doors

Lynden Doors - Interior Doors

WOODGRAIN DOOR SIMPSON DOOR SIMPSON STRONG TIE



#### For more information about GO GREEN products contact us at

**TRIN** 

1835 Commerce Ave. Boise, ID 83705 Phone: 208-336-9000 • Fax: 208-384-1658 Toll Free: 1-800-733-0312 A Division of Hoff Companies, Inc.

#### **OTHER PRODUCTS FROM TRIMCO**



Engineered Excellence





The Most Preferred Brand in the Business™

THERMA













oxusa





Goldberg Brothers

























THE ULTIMATE FLOORING EXPERIENCE



