

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123
CLIENT PROJECT NUMBER: 00000



524 SOUTH 600 EAST
SALT LAKE CITY, UT 84102
801.575.8800 | VCBO.COM

owner

STEVE ROSE
INTERMOUNTAIN HEALTH CARE
36 SOUTH STATE STREET, SUITE 2300
MURRAY, UTAH 84111
steve.rose@mail.org
801.442.2861

architect

TODD BRAUN, AIA
VCBO ARCHITECTURE
524 SOUTH 600 EAST
SALT LAKE CITY, UT 84102
tbraun@vcbo.com
801.575.8800

electrical engineer

TYLER SQUIRE
SPECTRUM ENGINEERS
324 SOUTH STATE ST. #400
SALT LAKE CITY, UTAH 84111
tts@spectrum-engineers.com
801.328.5151



1

2

3

4

5

6

ABBREVIATIONS

NOT ALL ABBREVIATIONS MAY BE USED

& @	AND AT	LAV LB / LBS	LAVATORY POUND (S)
ACT	ACOUSTICAL CEILING TILE	MAT	MATERIAL (S)
ADJ	ADJUSTABLE	MAX	MAXIMUM
AFP	ABOVE FINISH FLOOR	MD	MEDIUM DENSITY
ALT	ALTERNATE	MECH	MECHANICAL
AL ALUM	ALUMINUM	MEMB	MEMBRANE
APPROX	APPROXIMATE	MEZZ	MEZZAINE
ARCH	ARCHITECTURAL	MFR	MANUFACTURER
BD	BOARD	MSR	MANAGER
BLDG	BUILDING	MN	MINIMUM
BLK	BLOCKING	MIR	MIRROR
BO	BOTTOM OF	MISC	MISCELLANEOUS
BRG	BEARING	MO	MASONRY OPENING
BSMT	BASEMENT	MTD	MOUNT (ED)
BS	BOTH SIDES	MTL	METAL
BW	BOTH WAYS	MW	MICROWAVE
CAB	CABINET	N	NORTH
CCB	CATCH BASIN	NC	NOT IN CONTRACT
CCSA	CUSTOM COLOR SELECTED BY ARCHITECT	NO	NUMBER
CG	CORNER GUARD	NOM	NOMINAL
CHAM	CHAMFER	NRC	NOISE REDUCTION COEFFICIENT
CJ	CONTROL JOINT	OD	ON CENTER
CL	CENTER LINE	OFCJ	OUTSIDE DIAMETER
CLG	CEILING	OFCJ	OWNER FURNISHED/ CONTRACTOR
CLR	CLEAR	OFD	INSTALLED
CM	CONSTRUCTION MANAGER	OP	OVERFLOW DRAIN
COL	COLUMN	OH	OVERHEAD
COMP	COMPUTER	OPG	OPENING
CONC	CONCRETE	OPP	OPPOSITE
CONT	CONTINUOUS	OSB	ORIENTED STRAND BOARD
CMU	CONCRETE MASONRY UNIT	OZ	OUNCE
CSBA	COLOR SELECTED BY ARCHITECT	PERI	PERIMETER
CT	CERAMIC TILE	PL	PLATE
D	DEPTH	PLM	PLASTIC LAMINATE
DB	DECK BEARING	PNL	PANEL
DBL	DOUBLE	PNT	PAINT (ED)
DEPT	DEPARTMENT	P.O.	POINT OF
DF	DRINKING FOUNTAIN	PR	PAIR
DIA	DIAMETER	PT	POST TENSIONED
DN	DIMENSION	PART	PARTITION
DN	DOWN	PLY	PLYWOOD
DRN	DRAIN	QT	QUARRY TILE
DTL/DET	DETAIL	R / RAD	RADIUS
DWG	DRAWING	REC	REFLECTED CEILING PLAN
E	EAST	REF	RECESSED
EA	EACH	REF	REFERENCE
EIPS	EXTERIOR INSULATION SYSTEM	REFG	REFRIGERATOR
EJ	EXPANSION JOINT	REINF	REINFORCE (ED)
ELEC	ELECTRICAL	REM	REMOVE (ED)
ELEV	ELEVATION	REPL	REPLACE
EQ	EQUAL	REQD	REQUIRED
EQUIP	EQUIPMENT	REV	REVISION (S)
EVAP	EVAPORATIVE	RM	ROOM
EXIST	EXISTING	RO	ROUGH OPENING
EXP	EXPANSION	S	SOUTH
EXT	EXTERIOR	SALV	SALVAGE (ED)
EWC	ELECTRIC WATER COOLER	SECT	SECTION
FA	FIRE ALARM	SF	SQUARE FOOT
FD	FLOOR DRAIN	SIM	SIMILAR
FDN	FOUNDATION	SLNT	SEALANT
FE	FIRE EXTINGUISHER	SPEC	SPECIFICATION (S)
FEC	FIRE EXTINGUISHER CABINET	SQ	SQUARE
FG	FINISH GRADE	SS	STAINLESS STEEL
FH	FIRE HYDRANT	STC	SOUND TRANSMISSION CLASS
FN	FINISHED	STD	STANDARD
FLR	FLOOR	STL	STEEL
F.O.	FACE OF	STOR	STORAGE
FT	FOOT, FEET	STRUC	STRUCTURE (AL)
FRP	FIBER REINFORCED PANEL	SUSP	SUSPENDED
FRT	FIRE RETARDANT TREATED WOOD	SYM	SYMMETRY (ICAL)
FTG	FOOTING	T	THICKNESS
FV	FIELD VERIFY	T & B	TOP AND BOTTOM
GA	GAUGE	T & G	TONGUE AND GROOVE
GALV	GALVANIZED	TBD	TO BE DETERMINED
GB	GRAB BAR	TEMP	TEMPORARY
GC	GENERAL CONTRACTOR	THRU	THROUGH
GFRC	GLASS/FIBER REINFORCED PANEL	T.O.	TOP OF
GYP	GYPSPUM	TRANS	TRANSFORMER
GWB	GYPSPUM WALLBOARD	TS	TUBE STEEL
HB	HOSE BIB	TYP	TYPICAL
HC	HANDICAP ACCESSIBLE	UNF	UNFINISHED
HDW	HARDWARE	UNO	UNLESS OTHERWISE NOTED
HDF	HIGH DENSITY FIBERBOARD	VAR	VARIES
HM	HOLLOW METAL	VB	VAPOR BARRIER
H	HEIGHT	VCT	VINYL COMPOSITION TILE
HOR	HORIZONTAL	VERT	VERTICAL
ID	INSIDE DIAMETER	VEST	VESTIBULE
ICF	INSULATED CONCRETE FORM	VWC	VINYL WALL COVERING
IN	INCH	W	WEST
INCL	INCLUDE	W	WIDTH
INFO	INFORMATION	W	WITH
INT	INTERIOR	WC	WATER CLOSET
INSUL	INSULATE, (D), (ION)	WD	WOOD
INV	INVERT	W/O	WITHOUT
JST	JOIST	WSCOT	WAINSCOT
JT	JOINT	WWF	WELDED WIRE FABRIC

UTILITY CONTACTS

PROJECT TEAM

REFERENCE SYMBOL LEGEND

DESIGN DATA

SHEET INDEX

1

2

3

4

5

6

ABBREVIATIONS

NOT ALL ABBREVIATIONS MAY BE USED

& @	AND AT	LAV LB / LBS	LAVATORY POUND (S)
ACT	ACOUSTICAL CEILING TILE	MAT	MATERIAL (S)
ADJ	ADJUSTABLE	MAX	MAXIMUM
AFP	ABOVE FINISH FLOOR	MD	MEDIUM DENSITY
ALT	ALTERNATE	MECH	MECHANICAL
AL ALUM	ALUMINUM	MEMB	MEMBRANE
APPROX	APPROXIMATE	MEZZ	MEZZAINE
ARCH	ARCHITECTURAL	MFR	MANUFACTURER
BD	BOARD	MSR	MANAGER
BLDG	BUILDING	MN	MINIMUM
BLK	BLOCKING	MIR	MIRROR
BO	BOTTOM OF	MISC	MISCELLANEOUS
BRG	BEARING	MO	MASONRY OPENING
BSMT	BASEMENT	MTD	MOUNT (ED)
BS	BOTH SIDES	MTL	METAL
BW	BOTH WAYS	MW	MICROWAVE
CAB	CABINET	N	NORTH
CCB	CATCH BASIN	NC	NOT IN CONTRACT
CCSA	CUSTOM COLOR SELECTED BY ARCHITECT	NO	NUMBER
CG	CORNER GUARD	NOM	NOMINAL
CHAM	CHAMFER	NRC	NOISE REDUCTION COEFFICIENT
CJ	CONTROL JOINT	OD	ON CENTER
CL	CENTER LINE	OFCJ	OUTSIDE DIAMETER
CLG	CEILING	OFCJ	OWNER FURNISHED/ CONTRACTOR
CLR	CLEAR	OFD	INSTALLED
CM	CONSTRUCTION MANAGER	OP	OVERFLOW DRAIN
COL	COLUMN	OH	OVERHEAD
COMP	COMPUTER	OPG	OPENING
CONC	CONCRETE	OPP	OPPOSITE
CONT	CONTINUOUS	OSB	ORIENTED STRAND BOARD
CMU	CONCRETE MASONRY UNIT	OZ	OUNCE
CSBA	COLOR SELECTED BY ARCHITECT	PERI	PERIMETER
CT	CERAMIC TILE	PL	PLATE
D	DEPTH	PLM	PLASTIC LAMINATE
DB	DECK BEARING	PNL	PANEL
DBL	DOUBLE	PNT	PAINT (ED)
DEPT	DEPARTMENT	P.O.	POINT OF
DF	DRINKING FOUNTAIN	PR	PAIR
DIA	DIAMETER	PT	POST TENSIONED
DN	DIMENSION	PART	PARTITION
DN	DOWN	PLY	PLYWOOD
DRN	DRAIN	QT	QUARRY TILE
DTL/DET	DETAIL	R / RAD	RADIUS
DWG	DRAWING	REC	REFLECTED CEILING PLAN
E	EAST	REF	RECESSED
EA	EACH	REF	REFERENCE
EIPS	EXTERIOR INSULATION SYSTEM	REFG	REFRIGERATOR
EJ	EXPANSION JOINT	REINF	REINFORCE (ED)
ELEC	ELECTRICAL	REM	REMOVE (ED)
ELEV	ELEVATION	REPL	REPLACE
EQ	EQUAL	REQD	REQUIRED
EQUIP	EQUIPMENT	REV	REVISION (S)
EVAP	EVAPORATIVE	RM	ROOM
EXIST	EXISTING	RO	ROUGH OPENING
EXP	EXPANSION	S	SOUTH
EXT	EXTERIOR	SALV	SALVAGE (ED)
EWC	ELECTRIC WATER COOLER	SECT	SECTION
FA	FIRE ALARM	SF	SQUARE FOOT
FD	FLOOR DRAIN	SIM	SIMILAR
FDN	FOUNDATION	SLNT	SEALANT
FE	FIRE EXTINGUISHER	SPEC	SPECIFICATION (S)
FEC	FIRE EXTINGUISHER CABINET	SQ	SQUARE
FG	FINISH GRADE	SS	STAINLESS STEEL
FH	FIRE HYDRANT	STC	SOUND TRANSMISSION CLASS
FN	FINISHED	STD	STANDARD
FLR	FLOOR	STL	STEEL
F.O.	FACE OF	STOR	STORAGE
FT	FOOT, FEET	STRUC	STRUCTURE (AL)
FRP	FIBER REINFORCED PANEL	SUSP	SUSPENDED
FRT	FIRE RETARDANT TREATED WOOD	SYM	SYMMETRY (ICAL)
FTG	FOOTING	T	THICKNESS
FV	FIELD VERIFY	T & B	TOP AND BOTTOM
GA	GAUGE	T & G	TONGUE AND GROOVE
GALV	GALVANIZED	TBD	TO BE DETERMINED
GB	GRAB BAR	TEMP	TEMPORARY
GC	GENERAL CONTRACTOR	THRU	THROUGH
GFRC	GLASS/FIBER REINFORCED PANEL	T.O.	TOP OF
GYP	GYPSPUM	TRANS	TRANSFORMER
GWB	GYPSPUM WALLBOARD	TS	TUBE STEEL
HB	HOSE BIB	TYP	TYPICAL
HC	HANDICAP ACCESSIBLE	UNF	UNFINISHED
HDW	HARDWARE	UNO	UNLESS OTHERWISE NOTED
HDF	HIGH DENSITY FIBERBOARD	VAR	VARIES
HM	HOLLOW METAL	VB	VAPOR BARRIER
H	HEIGHT	VCT	VINYL COMPOSITION TILE
HOR	HORIZONTAL	VERT	VERTICAL
ID	INSIDE DIAMETER	VEST	VESTIBULE
ICF	INSULATED CONCRETE FORM	VWC	VINYL WALL COVERING
IN	INCH	W	WEST
INCL	INCLUDE	W	WIDTH
INFO	INFORMATION	W	WITH
INT	INTERIOR	WC	WATER CLOSET
INSUL	INSULATE, (D), (ION)	WD	WOOD
INV	INVERT	W/O	WITHOUT
JST	JOIST	WSCOT	WAINSCOT
JT	JOINT	WWF	WELDED WIRE FABRIC

UTILITY CONTACTS

PROJECT TEAM

REFERENCE SYMBOL LEGEND

DESIGN DATA

SHEET INDEX

1

2

3

4

5

6

ABBREVIATIONS

NOT ALL ABBREVIATIONS MAY BE USED

& @	AND AT	LAV LB / LBS	LAVATORY POUND (S)
ACT	ACOUSTICAL CEILING TILE	MAT	MATERIAL (S)
ADJ	ADJUSTABLE	MAX	MAXIMUM
AFP	ABOVE FINISH FLOOR	MD	MEDIUM DENSITY
ALT	ALTERNATE	MECH	MECHANICAL
AL ALUM	ALUMINUM	MEMB	MEMBRANE
APPROX	APPROXIMATE	MEZZ	MEZZAINE
ARCH	ARCHITECTURAL	MFR	MANUFACTURER
BD	BOARD	MSR	MANAGER
BLDG	BUILDING	MN	MINIMUM
BLK	BLOCKING	MIR	MIRROR
BO	BOTTOM OF	MISC	MISCELLANEOUS
BRG	BEARING	MO	MASONRY OPENING
BSMT	BASEMENT	MTD	MOUNT (ED)
BS	BOTH SIDES	MTL	METAL
BW	BOTH WAYS	MW	MICROWAVE
CAB	CABINET	N	NORTH
CCB	CATCH BASIN	NC	NOT IN CONTRACT
CCSA	CUSTOM COLOR SELECTED BY ARCHITECT	NO	NUMBER
CG	CORNER GUARD	NOM	NOMINAL
CHAM	CHAMFER	NRC	NOISE REDUCTION COEFFICIENT
CJ	CONTROL JOINT	OD	ON CENTER
CL	CENTER LINE	OFCJ	OUTSIDE DIAMETER
CLG	CEILING	OFCJ	OWNER FURNISHED/ CONTRACTOR
CLR	CLEAR	OFD	INSTALLED
CM	CONSTRUCTION MANAGER	OP	OVERFLOW DRAIN
COL	COLUMN	OH	OVERHEAD
COMP	COMPUTER	OPG	OPENING
CONC	CONCRETE	OPP	OPPOSITE
CONT	CONTINUOUS	OSB	ORIENTED STRAND BOARD
CMU	CONCRETE MASONRY UNIT	OZ	OUNCE
CSBA	COLOR SELECTED BY ARCHITECT	PERI	PERIMETER
CT	CERAMIC TILE	PL	PLATE
D	DEPTH	PLM	PLASTIC LAMINATE
DB	DECK BEARING	PNL	PANEL
DBL	DOUBLE	PNT	PAINT (ED)
DEPT	DEPARTMENT	P.O.	POINT OF
DF	DRINKING FOUNTAIN	PR	PAIR
DIA	DIAMETER	PT	POST TENSIONED
DN	DIMENSION	PART	PARTITION
DN	DOWN	PLY	PLYWOOD
DRN	DRAIN	QT	QUARRY TILE
DTL/DET	DETAIL	R / RAD	RADIUS
DWG	DRAWING	REC	REFLECTED CEILING PLAN
E	EAST	REF	RECESSED
EA	EACH	REF	REFERENCE
EIPS	EXTERIOR INSULATION SYSTEM	REFG	REFRIGERATOR
EJ	EXPANSION JOINT	REINF	REINFORCE (ED)
ELEC	ELECTRICAL	REM	REMOVE (ED)
ELEV	ELEVATION	REPL	REPLACE
EQ	EQUAL	REQD	REQUIRED
EQUIP	EQUIPMENT	REV	REVISION (S)
EVAP	EVAPORATIVE	RM	ROOM
EXIST	EXISTING	RO	ROUGH OPENING
EXP	EXPANSION	S	SOUTH
EXT	EXTERIOR	SALV	SALVAGE (ED)
EWC	ELECTRIC WATER COOLER	SECT	SECTION
FA	FIRE ALARM	SF	SQUARE FOOT
FD	FLOOR DRAIN	SIM	SIMILAR
FDN	FOUNDATION	SLNT	SEALANT
FE	FIRE EXTINGUISHER	SPEC	SPECIFICATION (S)
FEC	FIRE EXTINGUISHER CABINET	SQ	SQUARE
FG	FINISH GRADE	SS	STAINLESS STEEL
FH	FIRE HYDRANT	STC	SOUND TRANSMISSION CLASS
FN	FINISHED	STD	STANDARD
FLR	FLOOR	STL	STEEL
F.O.	FACE OF	STOR	STORAGE
FT	FOOT, FEET	STRUC	STRUCTURE (AL)
FRP	FIBER REINFORCED PANEL	SUSP	SUSPENDED
FRT	FIRE RETARDANT TREATED WOOD	SYM	SYMMETRY (ICAL)
FTG	FOOTING	T	THICKNESS
FV	FIELD VERIFY	T & B	TOP AND BOTTOM
GA	GAUGE	T & G	TONGUE AND GROOVE
GALV	GALVANIZED	TBD	TO BE DETERMINED
GB	GRAB BAR	TEMP	TEMPORARY
GC	GENERAL CONTRACTOR	THRU	THROUGH
GFRC	GLASS/FIBER REINFORCED PANEL	T.O.	TOP OF
GYP	GYPSPUM	TRANS	TRANSFORMER
GWB	GYPSPUM WALLBOARD	TS	TUBE STEEL
HB	HOSE BIB	TYP	TYPICAL
HC	HANDICAP ACCESSIBLE	UNF	UNFINISHED
HDW	HARDWARE	UNO	UNLESS OTHERWISE NOTED
HDF	HIGH DENSITY FIBERBOARD	VAR	VARIES
HM	HOLLOW METAL	VB	VAPOR BARRIER
H	HEIGHT	VCT	VINYL COMPOSITION TILE
HOR	HORIZONTAL	VERT	VERTICAL
ID	INSIDE DIAMETER	VEST	VESTIBULE
ICF	INSULATED CONCRETE FORM	VWC	VINYL WALL COVERING
IN	INCH	W	WEST
INCL	INCLUDE	W	WIDTH
INFO	INFORMATION	W	WITH
INT	INTERIOR	WC	WATER CLOSET
INSUL	INSULATE, (D), (ION)	WD	WOOD
INV	INVERT	W/O	WITHOUT
JST	JOIST	WSCOT	WAINSCOT
JT	JOINT	WWF	WELDED WIRE FABRIC

UTILITY CONTACTS

PROJECT TEAM

REFERENCE SYMBOL LEGEND

DESIGN DATA

SHEET INDEX

1

2

3

4

5

6

ABBREVIATIONS

NOT ALL ABBREVIATIONS MAY BE USED

& @	AND AT	LAV LB / LBS	LAVATORY POUND (S)
ACT	ACOUSTICAL CEILING TILE	MAT	MATERIAL (S)
ADJ	ADJUSTABLE	MAX	MAXIMUM
AFP	ABOVE FINISH FLOOR	MD	MEDIUM DENSITY
ALT	ALTERNATE	MECH	MECHANICAL
AL ALUM	ALUMINUM	MEMB	MEMBRANE
APPROX	APPROXIMATE	MEZZ	MEZZAINE
ARCH	ARCHITECTURAL	MFR	MANUFACTURER
BD	BOARD	MSR	MANAGER
BLDG	BUILDING	MN	MINIMUM
BLK	BLOCKING	MIR	MIRROR
BO	BOTTOM OF	MISC	MISCELLANEOUS
BRG	BEARING	MO	MASONRY OPENING
BSMT	BASEMENT	MTD	MOUNT (ED)
BS	BOTH SIDES	MTL	METAL
BW	BOTH WAYS	MW	MICROWAVE
CAB	CABINET	N	NORTH
CCB	CATCH BASIN	NC	NOT IN CONTRACT
CCSA	CUSTOM COLOR SELECTED BY ARCHITECT	NO	NUMBER
CG	CORNER GUARD	NOM	NOMINAL
CHAM	CHAMFER	NRC	NOISE REDUCTION COEFFICIENT
CJ	CONTROL JOINT	OD	ON CENTER
CL	CENTER LINE	OFCJ	OUTSIDE DIAMETER
CLG	CEILING	OFCJ	OWNER FURNISHED/ CONTRACTOR
CLR	CLEAR	OFD	INSTALLED
CM	CONSTRUCTION MANAGER	OP	OVERFLOW DRAIN
COL	COLUMN	OH	OVERHEAD
COMP	COMPUTER	OPG	OPENING
CONC	CONCRETE	OPP	OPPOSITE
CONT	CONTINUOUS	OSB	ORIENTED STRAND BOARD
CMU	CONCRETE MASONRY UNIT	OZ	OUNCE
CSBA	COLOR SELECTED BY ARCHITECT	PERI	PERIMETER
CT	CERAMIC TILE	PL	PLATE
D	DEPTH	PLM	PLASTIC LAMINATE
DB	DECK BEARING	PNL	PANEL
DBL	DOUBLE	PNT	PAINT (ED)
DEPT	DEPARTMENT	P.O.	POINT OF
DF	DRINKING FOUNTAIN	PR	PAIR
DIA	DIAMETER	PT	POST TENSIONED
DN	DIMENSION	PART	PARTITION
DN	DOWN	PLY	PLYWOOD
DRN	DRAIN	QT	QUARRY TILE
DTL/DET	DETAIL	R / RAD	RADIUS
DWG	DRAWING	REC	REFLECTED CEILING PLAN
E	EAST	REF	RECESSED
EA	EACH	REF	REFERENCE
EIPS	EXTERIOR INSULATION SYSTEM	REFG	REFRIGERATOR
EJ	EXPANSION JOINT	REINF	REINFORCE (ED)
ELEC	ELECTRICAL	REM	REMOVE (ED)
ELEV	ELEVATION	REPL	REPLACE
EQ	EQUAL	REQD	REQUIRED
EQUIP	EQUIPMENT	REV	REVISION (S)
EVAP	EVAPORATIVE	RM	ROOM
EXIST	EXISTING	RO	ROUGH OPENING
EXP	EXPANSION	S	SOUTH
EXT	EXTERIOR	SALV	SALVAGE (ED)
EWC	ELECTRIC WATER COOLER	SECT	SECTION
FA	FIRE ALARM	SF	SQUARE FOOT
FD	FLOOR DRAIN	SIM	SIMILAR
FDN	FOUNDATION	SLNT	SEALANT
FE	FIRE EXTINGUISHER	SPEC	SPECIFICATION (S)
FEC	FIRE EXTINGUISHER CABINET	SQ	SQUARE
FG	FINISH GRADE	SS	STAINLESS STEEL
FH	FIRE HYDRANT	STC	SOUND TRANSMISSION CLASS
FN	FINISHED	STD	STANDARD
FLR	FLOOR	STL	STEEL
F.O.	FACE OF	STOR	STORAGE
FT	FOOT, FEET	STRUC	STRUCTURE (AL)
FRP	FIBER REINFORCED PANEL	SUSP	SUSPENDED
FRT	FIRE RETARDANT TREATED WOOD	SYM	SYMMETRY (ICAL)
FTG	FOOTING	T	THICKNESS

GENERAL DEMOLITION NOTES

1. FIELD VERIFY DIMENSIONS AND CONDITIONS INCLUDING EXISTING UTILITIES PRIOR TO BIDDING. BRING OFFERING DIMENSIONS AND CONDITIONS TO ARCHITECT'S ATTENTION PRIOR TO BIDDING.
2. A HAZARDOUS MATERIAL SURVEY IS AVAILABLE FROM THE OWNER. ABATEMENT MUST BE COMPLETED PRIOR TO DEMOLITION OF BUILDINGS OR BUILDING ELEMENTS.
3. PROVIDE DUSTPROOF ENCLOSURES AT PERIMETER OF CONSTRUCTION & DEMOLITION FOR PROTECTION OF ADJACENT SPACES.
4. COORDINATE MAINTENANCE OF FIRE EGRESS FOR OCCUPANTS IN EXISTING BUILDING WITH THE OWNER AND FIRE MARSHAL. PROVIDE NECESSARY TEMPORARY WALLS OR ENCLOSURES, EMERGENCY LIGHTS, ETC., FOR THE DURATION OF CONSTRUCTION.
5. BRING TO ARCHITECT'S ATTENTION EXISTING CONDITIONS THAT PRESENT ANY CODE VIOLATIONS, INCORRECT CONSTRUCTION OR SAFETY PROBLEMS.
6. MAINTAIN EXISTING FIRE RATINGS, AND ASSOCIATED FIRE PROTECTION SYSTEMS (I.E. FIRE SPRINKLERS AND FIRE ALARM SYSTEMS) THROUGHOUT CONSTRUCTION. COORDINATE ANY INTERRUPTION TO THESE SYSTEMS WITH THE OWNER AND FIRE MARSHAL. PROVIDE FIRE WATCH REQUIREMENTS ASSOCIATED WITH INTERRUPTIONS TO THESE SYSTEMS.
7. PROTECT EXISTING STRUCTURE, FINISHES, AND SITE ELEMENTS NOT SCHEDULED FOR DEMOLITION. RESTORE DAMAGED ITEMS TO THEIR ORIGINAL CONDITION OR REPLACE AT CONTRACTOR'S EXPENSE.
8. REMOVE BUILDINGS TO BE DEMOLISHED IN THEIR ENTIRETY, INCLUDING CONCRETE FOOTINGS AND FOUNDATIONS. DISPOSE PER CITY REQUIREMENTS.
9. REMOVE AND DISPOSE SELECTIVE DEMOLITION MATERIAL PER CITY REQUIREMENTS.
10. SALVAGE MATERIAL WHERE INDICATED. REMOVE ITEMS FROM CURRENT LOCATIONS & PREPARE FOR TRANSPORT BY THE OWNER.
11. MAINTAIN EXISTING UTILITY SERVICES FOR EXISTING FACILITIES. COORDINATE REQUIRED DISRUPTION OF THESE SERVICES WITH OWNER PRIOR TO DISCONNECTING. PROVIDE TEMPORARY UTILITY SERVICES TO KEEP FACILITIES IN OPERATION DURING UTILITY RELOCATION INCLUDING BUT NOT LIMITED TO FIRE WATCHES, ELECTRICAL GENERATORS, ETC.

GENERAL PLAN DEMOLITION NOTES

1. REFER TO ELECTRICAL AND MECHANICAL PLANS FOR REQUIRED ADDITIONAL DEMOLITION.
2. MAINTAIN EXISTING FIRE RATINGS THROUGHOUT CONSTRUCTION.
3. DO NOT DISTURB EXISTING FIRE RATED ELEMENTS INCLUDING FIREPROOFING, PATCH/REPAIR. DAMAGED OR DISTURBED ITEMS.
4. AFTER DEMOLITION, PRIOR TO FINISH, PATCH AND REPAIR EXISTING WALLS TO PROVIDE SMOOTH SURFACE SUITABLE FOR PAINTING OR WALL COVERING.
5. PATCH & LEVEL EXISTING CONCRETE SLABS FOR NEW FINISHES WITH FLOOR LEVELING COMPOUND.
6. FIELD VERIFY AND COORDINATE SAW CUTTING OF THE CONCRETE FLOOR SLAB WITH PLUMBING AND ELECTRICAL.
7. REPLACE SLAB AND TRENCH BY COMPACTING CLEAN GRAVEL IN 8 INCH LIFTS. DRILL #4 EPOXY-COATED REBAR INTO EXISTING SLAB @ 12 INCHES OC. POUR SLAB TO PROVIDE A SMOOTH EVEN FLOOR.
8. WHERE ELECTRICAL CIRCUIT CONTINUITY IS INTERRUPTED, BUT MUST BE MAINTAINED, MAKE NECESSARY MODIFICATIONS TO MAINTAIN CIRCUIT INTEGRITY.
9. REMOVE ELECTRICAL BOXES BEHIND RELOCATED MILLWORK AND CAP AS REQUIRED.
10. CAP EXISTING DUCT WORK FOR DUST CONTROL.

DEMOLITION LEGEND

- HALF-TONE LINE DENOTES ITEMS TO REMAIN
- - - DASHED LINE DENOTES ITEMS TO BE DEMOLISHED
■ AREA TO REMAIN UNDISTURBED DURING CONSTRUCTION

KEYED NOTES

- 201.0 EXISTING FLOORING TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED
202.0 EXISTING WALL TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED
203.0 EXISTING WOOD CASEWORK TO REMAIN, PROTECT AS NECESSARY
204.0 EXISTING ACOUSTIC PANEL TO REMAIN, PROTECT AS NECESSARY
204.1 REMOVE & DISPOSE OF EXISTING VINYL WALLCOVERING, PATCH & PREP WALL BENEATH AS NEEDED FOR PAINTING
207.0 EXISTING DOOR TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED
208.0 EXISTING WALL TILE TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED

REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER:	20235.01
CLIENT NUMBER:	00000
DATE:	01-15-2022

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS

DEMOLITION PLAN - LEVEL
01

AD110.1

A1 PLAN - LEVEL 01 - DEMOLITION

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES

1. FIELD VERIFY DIMENSIONS AND CONDITIONS INCLUDING EXISTING UTILITIES PRIOR TO BIDDING. BRING OFFERINGS DIMENSIONS AND CONDITIONS TO ARCHITECT'S ATTENTION PRIOR TO BIDDING.
2. A HAZARDOUS MATERIAL SURVEY IS AVAILABLE FROM THE OWNER. ABATEMENT MUST BE COMPLETED PRIOR TO DEMOLITION OF BUILDINGS OR BUILDING ELEMENTS.
3. PROVIDE DUSTPROOF ENCLOSURES AT PERIMETER OF CONSTRUCTION & DEMOLITION FOR PROTECTION OF ADJACENT SPACES.
4. COORDINATE MAINTENANCE OF FIRE EGRESS FOR OCCUPANTS IN EXISTING BUILDING WITH THE OWNER AND FIRE MARSHAL. PROVIDE NECESSARY TEMPORARY WALLS OR ENCLOSURES, EMERGENCY LIGHTS, ETC., FOR THE DURATION OF CONSTRUCTION.
5. BRING TO ARCHITECT'S ATTENTION EXISTING CONDITIONS THAT PRESENT ANY CODE VIOLATIONS, INCORRECT CONSTRUCTION OR SAFETY PROBLEMS.
6. MAINTAIN EXISTING FIRE RATINGS, AND ASSOCIATED FIRE PROTECTION SYSTEMS (I.E. FIRE SPRINKLERS AND FIRE ALARM SYSTEMS) THROUGHOUT CONSTRUCTION. COORDINATE ANY INTERRUPTION TO THESE SYSTEMS WITH THE OWNER AND FIRE MARSHAL. PROVIDE FIRE WATCH REQUIREMENTS ASSOCIATED WITH INTERRUPTIONS TO THESE SYSTEMS.
7. PROTECT EXISTING STRUCTURE, FINISHES, AND SITE ELEMENTS NOT SCHEDULED FOR DEMOLITION. RESTORE DAMAGED ITEMS TO THEIR ORIGINAL CONDITION OR REPLACE AT CONTRACTOR'S EXPENSE.
8. REMOVE BUILDINGS TO BE DEMOLISHED IN THEIR ENTIRETY, INCLUDING CONCRETE FOOTINGS AND FOUNDATIONS. DISPOSE PER CITY REQUIREMENTS.
9. REMOVE AND DISPOSE SELECTIVE DEMOLITION MATERIAL PER CITY REQUIREMENTS.
10. SALVAGE MATERIAL WHERE INDICATED. REMOVE ITEMS FROM CURRENT LOCATIONS & PREPARE FOR TRANSPORT BY THE OWNER.
11. MAINTAIN EXISTING UTILITY SERVICES FOR EXISTING FACILITIES. COORDINATE REQUIRED DISRUPTION OF THESE SERVICES WITH OWNER PRIOR TO DISCONNECTING. PROVIDE TEMPORARY UTILITY SERVICES TO KEEP FACILITIES IN OPERATION DURING UTILITY RELOCATION INCLUDING BUT NOT LIMITED TO FIRE WATCHES, ELECTRICAL GENERATORS, ETC.

GENERAL PLAN DEMOLITION NOTES

1. REFER TO ELECTRICAL AND MECHANICAL PLANS FOR REQUIRED ADDITIONAL DEMOLITION.
2. MAINTAIN EXISTING FIRE RATINGS THROUGHOUT CONSTRUCTION.
3. DO NOT DISTURB EXISTING FIRE RATED ELEMENTS INCLUDING FIREPROOFING, PATCH/REPAIR. DAMAGED OR DISTURBED ITEMS.
4. AFTER DEMOLITION, PRIOR TO FINISH, PATCH AND REPAIR EXISTING WALLS TO PROVIDE SMOOTH SURFACE SUITABLE FOR PAINTING OR WALL COVERING.
5. PATCH & LEVEL EXISTING CONCRETE SLABS FOR NEW FINISHES WITH FLOOR LEVELING COMPOUND.
6. FIELD VERIFY AND COORDINATE SAW CUTTING OF THE CONCRETE FLOOR SLAB WITH PLUMBING AND ELECTRICAL.
7. REPLACE SLAB AND TRENCH BY COMPACTING CLEAN GRAVEL IN 8 INCH LIFTS. DRILL #4 EPOXY-COATED REBAR INTO EXISTING SLAB @ 12 INCHES OC. POUR SLAB TO PROVIDE A SMOOTH EVEN FLOOR.
8. WHERE ELECTRICAL CIRCUIT CONTINUITY IS INTERRUPTED, BUT MUST BE MAINTAINED, MAKE NECESSARY MODIFICATIONS TO MAINTAIN CIRCUIT INTEGRITY.
9. REMOVE ELECTRICAL BOXES BEHIND RELOCATED MILLWORK AND CAP AS REQUIRED.
10. CAP EXISTING DUCT WORK FOR DUST CONTROL.

DEMOLITION LEGEND

- HALF-TONE LINE DENOTES ITEMS TO REMAIN
- - - DASHED LINE DENOTES ITEMS TO BE DEMOLISHED
■ AREA TO REMAIN UNDISTURBED DURING CONSTRUCTION

KEYED NOTES

- 204.1 REMOVE & DISPOSE OF EXISTING VINYL WALLCOVERING, PATCH & PREP WALL BENEATH AS NEEDED FOR PAINTING
205.0 EXISTING CEILING/SOFFIT TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED
206.1 REMOVE & DISPOSE OF EXISTING COVE LIGHTING, TO BE REPLACED WITH NEW LED COVE LIGHTING
206.2 REMOVE EXISTING PENDANT FIXTURE(S), TO BE REPLACED WITH NEW LED FIXTURE(S); DONATE EXISTING FIXTURES FOR SALVAGE.

REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER:	20235.01
CLIENT NUMBER:	00000
DATE:	01-15-2022

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS

REFLECTED CEILING
DEMOLITION PLAN - LEVEL
01

AD110.4

A1 REFLECTED CEILING PLAN - LEVEL 01 - DEMOLITION

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES

1. FIELD VERIFY DIMENSIONS AND CONDITIONS INCLUDING EXISTING UTILITIES PRIOR TO BIDDING. BRING OFFERING DIMENSIONS AND CONDITIONS TO ARCHITECT'S ATTENTION PRIOR TO BIDDING.
2. A HAZARDOUS MATERIAL SURVEY IS AVAILABLE FROM THE OWNER. ABATEMENT MUST BE COMPLETED PRIOR TO DEMOLITION OF BUILDINGS OR BUILDING ELEMENTS.
3. PROVIDE DUSTPROOF ENCLOSURES AT PERIMETER OF CONSTRUCTION & DEMOLITION FOR PROTECTION OF ADJACENT SPACES.
4. COORDINATE MAINTENANCE OF FIRE EGRESS FOR OCCUPANTS IN EXISTING BUILDING WITH THE OWNER AND FIRE MARSHAL. PROVIDE NECESSARY TEMPORARY WALLS OR ENCLOSURES, EMERGENCY LIGHTS, ETC., FOR THE DURATION OF CONSTRUCTION.
5. BRING TO ARCHITECT'S ATTENTION EXISTING CONDITIONS THAT PRESENT ANY CODE VIOLATIONS, INCORRECT CONSTRUCTION OR SAFETY PROBLEMS.
6. MAINTAIN EXISTING FIRE RATINGS, AND ASSOCIATED FIRE PROTECTION SYSTEMS (I.E. FIRE SPRINKLERS AND FIRE ALARM SYSTEMS) THROUGHOUT CONSTRUCTION. COORDINATE ANY INTERRUPTION TO THESE SYSTEMS WITH THE OWNER AND FIRE MARSHAL. PROVIDE FIRE WATCH REQUIREMENTS ASSOCIATED WITH INTERRUPTIONS TO THESE SYSTEMS.
7. PROTECT EXISTING STRUCTURE, FINISHES, AND SITE ELEMENTS NOT SCHEDULED FOR DEMOLITION. RESTORE DAMAGED ITEMS TO THEIR ORIGINAL CONDITION OR REPLACE AT CONTRACTOR'S EXPENSE.
8. REMOVE BUILDINGS TO BE DEMOLISHED IN THEIR ENTIRETY, INCLUDING CONCRETE FOOTINGS AND FOUNDATIONS. DISPOSE PER CITY REQUIREMENTS.
9. REMOVE AND DISPOSE SELECTIVE DEMOLITION MATERIAL PER CITY REQUIREMENTS.
10. SALVAGE MATERIAL WHERE INDICATED. REMOVE ITEMS FROM CURRENT LOCATIONS & PREPARE FOR TRANSPORT BY THE OWNER.
11. MAINTAIN EXISTING UTILITY SERVICES FOR EXISTING FACILITIES. COORDINATE REQUIRED DISRUPTION OF THESE SERVICES WITH OWNER PRIOR TO DISCONNECTING. PROVIDE TEMPORARY UTILITY SERVICES TO KEEP FACILITIES IN OPERATION DURING UTILITY RELOCATION INCLUDING BUT NOT LIMITED TO FIRE WATCHES, ELECTRICAL GENERATORS, ETC.

GENERAL PLAN DEMOLITION NOTES

1. REFER TO ELECTRICAL AND MECHANICAL PLANS FOR REQUIRED ADDITIONAL DEMOLITION.
2. MAINTAIN EXISTING FIRE RATINGS THROUGHOUT CONSTRUCTION.
3. DO NOT DISTURB EXISTING FIRE RATED ELEMENTS INCLUDING FIREPROOFING. PATCH/REPAIR DAMAGED OR DISTURBED ITEMS.
4. AFTER DEMOLITION, PRIOR TO FINISH, PATCH AND REPAIR EXISTING WALLS TO PROVIDE SMOOTH SURFACE SUITABLE FOR PAINTING OR WALL COVERING.
5. PATCH & LEVEL EXISTING CONCRETE SLABS FOR NEW FINISHES WITH FLOOR LEVELING COMPOUND.
6. FIELD VERIFY AND COORDINATE SAW CUTTING OF THE CONCRETE FLOOR SLAB WITH PLUMBING AND ELECTRICAL.
7. REPLACE SLAB AND TRENCH BY COMPACTING CLEAN GRAVEL IN 8 INCH LIFTS. DRILL #4 EPOXY-COATED REBAR INTO EXISTING SLAB @ 12 INCHES OC. POUR SLAB TO PROVIDE A SMOOTH EVEN FLOOR.
8. WHERE ELECTRICAL CIRCUIT CONTINUITY IS INTERRUPTED, BUT MUST BE MAINTAINED, MAKE NECESSARY MODIFICATIONS TO MAINTAIN CIRCUIT INTEGRITY.
9. REMOVE ELECTRICAL BOXES BEHIND RELOCATED MILLWORK AND CAP AS REQUIRED.
10. CAP EXISTING DUCT WORK FOR DUST CONTROL.

DEMOLITION LEGEND

- HALF-TONE LINE DENOTES ITEMS TO REMAIN
- - - DASHED LINE DENOTES ITEMS TO BE DEMOLISHED
■ AREA TO REMAIN UNDISTURBED DURING CONSTRUCTION

KEYED NOTES

- 206.0 EXISTING CEILING/SOFFIT TO REMAIN. PROTECT AS NECESSARY. REPAIR AS REQUIRED.
206.1 REMOVE & DISPOSE OF EXISTING COVE LIGHTING. TO BE REPLACED WITH NEW LED COVE LIGHTING.
206.2 REMOVE EXISTING PENDANT FIXTURE(S). TO BE REPLACED WITH NEW LED FIXTURE(S). DONATE EXISTING FIXTURES FOR SALVAGE.

REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2022

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS

REFLECTED CEILING
DEMOLITION PLAN - LEVEL
02

AD120.4

A1 REFLECTED CEILING PLAN - LEVEL 02 - DEMOLITION

SCALE: 1/8" = 1'-0"

KEYED NOTES

GENERAL CEILING NOTES

1. REMOVE OR MASK OFF ALL CEILING MOUNTED DEVICES PRIOR TO PAINTING.
2. REFER TO ARCHITECTURAL DRAWINGS FOR LOCATIONS OF LIGHT FIXTURES AND TO ELECTRICAL DRAWINGS FOR QUANTITY AND TYPES.

CEILING LEGEND (EXISTING)

- A - SUSPENDED 2' X 2' ACOUSTICAL LAY-IN TILE CEILING
B - SUSPENDED 2' X 4' ACOUSTICAL LAY-IN TILE CEILING
C - SUSPENDED 5/8" GYP. BD. CEILING SYSTEM - PAINT
D - SUSPENDED 5/8" EXTERIOR GYP. SOFFIT BD. - PAINT
E - SUSPENDED 5/8" GYP. BD. CEILING SYSTEM - EPOXY PAINT
G - OPEN TO STRUCTURE ABOVE
H - WOOD CEILING SYSTEM - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. ABOVE WOOD CEILING
I - CUSTOM WOOD CEILING
J - WOODWORKS PLANK CEILING OR APPROVED EQUAL - REFER SPECIFICATIONS
K - LINEAR ACOUSTICAL TILE CEILING 1' X 6' - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. A MIN. OF 24" OVERLAP OF ACOUSTICAL CEILING
L - SPRAY APPLIED ACOUSTICAL CLOSED CELL INSULATION - 1-1/2" MIN - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. TO MATCH INSULATION COLOR

CEILING SYMBOLS

ELECTRICAL

- 2'X4' FLUORESCENT FIXTURE
2'X2' FLUORESCENT FIXTURE
1'X4' FLUORESCENT FIXTURE
FLUORESCENT STRIP FIXTURE
RECESSED DOWN LIGHT
WALL WASH
1'X4' FLUORESCENT FIXTURE
PENDANT LIGHT FIXTURE
EXIT SIGN, SINGLE-SIDED
EXIT SIGN, DOUBLE-SIDED
FIRE ALARM
SPEAKER
SMOKE DETECTOR
WIRELESS INTERNET

MECHANICAL

- SUPPLY GRILLE
RETURN GRILLE
EXHAUST GRILLE
LINEAR DIFFUSER
SPRINKLER HEAD - CEILING MOUNT
SPRINKLER HEAD - WALL MOUNT

REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2022

A1 REFLECTED CEILING PLAN - LEVEL 01

SCALE: 1/8" = 1'-0"

KEYED NOTES

202.1 EXISTING WINDOW SYSTEM TO REMAIN, PROTECT AS REQUIRED

GENERAL CEILING NOTES

1. REMOVE OR MASK OFF ALL CEILING MOUNTED DEVICES PRIOR TO PAINTING.
2. REFER TO ARCHITECTURAL DRAWINGS FOR LOCATIONS OF LIGHT FIXTURES AND TO ELECTRICAL DRAWINGS FOR QUANTITY AND TYPES.

CEILING LEGEND (EXISTING)

- A - SUSPENDED 2' X 2' ACOUSTICAL LAY-IN TILE CEILING
B - SUSPENDED 2' X 4' ACOUSTICAL LAY-IN TILE CEILING
C - SUSPENDED 5/8" GYP. BD. CEILING SYSTEM - PAINT
D - SUSPENDED 5/8" EXTERIOR GYP. BD. SOFFIT BD. - PAINT
E - SUSPENDED 5/8" GYP. BD. CEILING SYSTEM - EPOXY PAINT
G - OPEN TO STRUCTURE ABOVE
H - WOOD CEILING SYSTEM - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. ABOVE WOOD CEILING
I - CUSTOM WOOD CEILING
J - WOODWORKS PLANK CEILING OR APPROVED EQUAL - REFER SPECIFICATIONS
K - LINEAR ACOUSTICAL TILE CEILING 1' X 6' - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. A MIN. OF 24" OVERLAP OF ACOUSTICAL CEILING
L - SPRAY APPLIED ACOUSTICAL CLOSED CELL INSULATION - 1-1/2" MIN - PAINT ALL BUILDING STRUCTURE, OVERHEAD MEP UTILITIES, ETC. TO MATCH INSULATION COLOR


CEILING SYMBOLS

ELECTRICAL

- 2X4' FLUORESCENT FIXTURE
2X2' FLUORESCENT FIXTURE
1X4' FLUORESCENT FIXTURE
FLUORESCENT STRIP FIXTURE
RECESSED DOWN LIGHT
WALL WASH
1X4' FLUORESCENT FIXTURE
PENDANT LIGHT FIXTURE
EXIT SIGN, SINGLE-SIDED
EXIT SIGN, DOUBLE-SIDED
FIRE ALARM
SPEAKER
SMOKE DETECTOR
WIRELESS INTERNET

MECHANICAL

- SUPPLY GRILLE
RETURN GRILLE
EXHAUST GRILLE
LINEAR DIFFUSER
SPRINKLER HEAD - CEILING MOUNT
SPRINKLER HEAD - WALL MOUNT

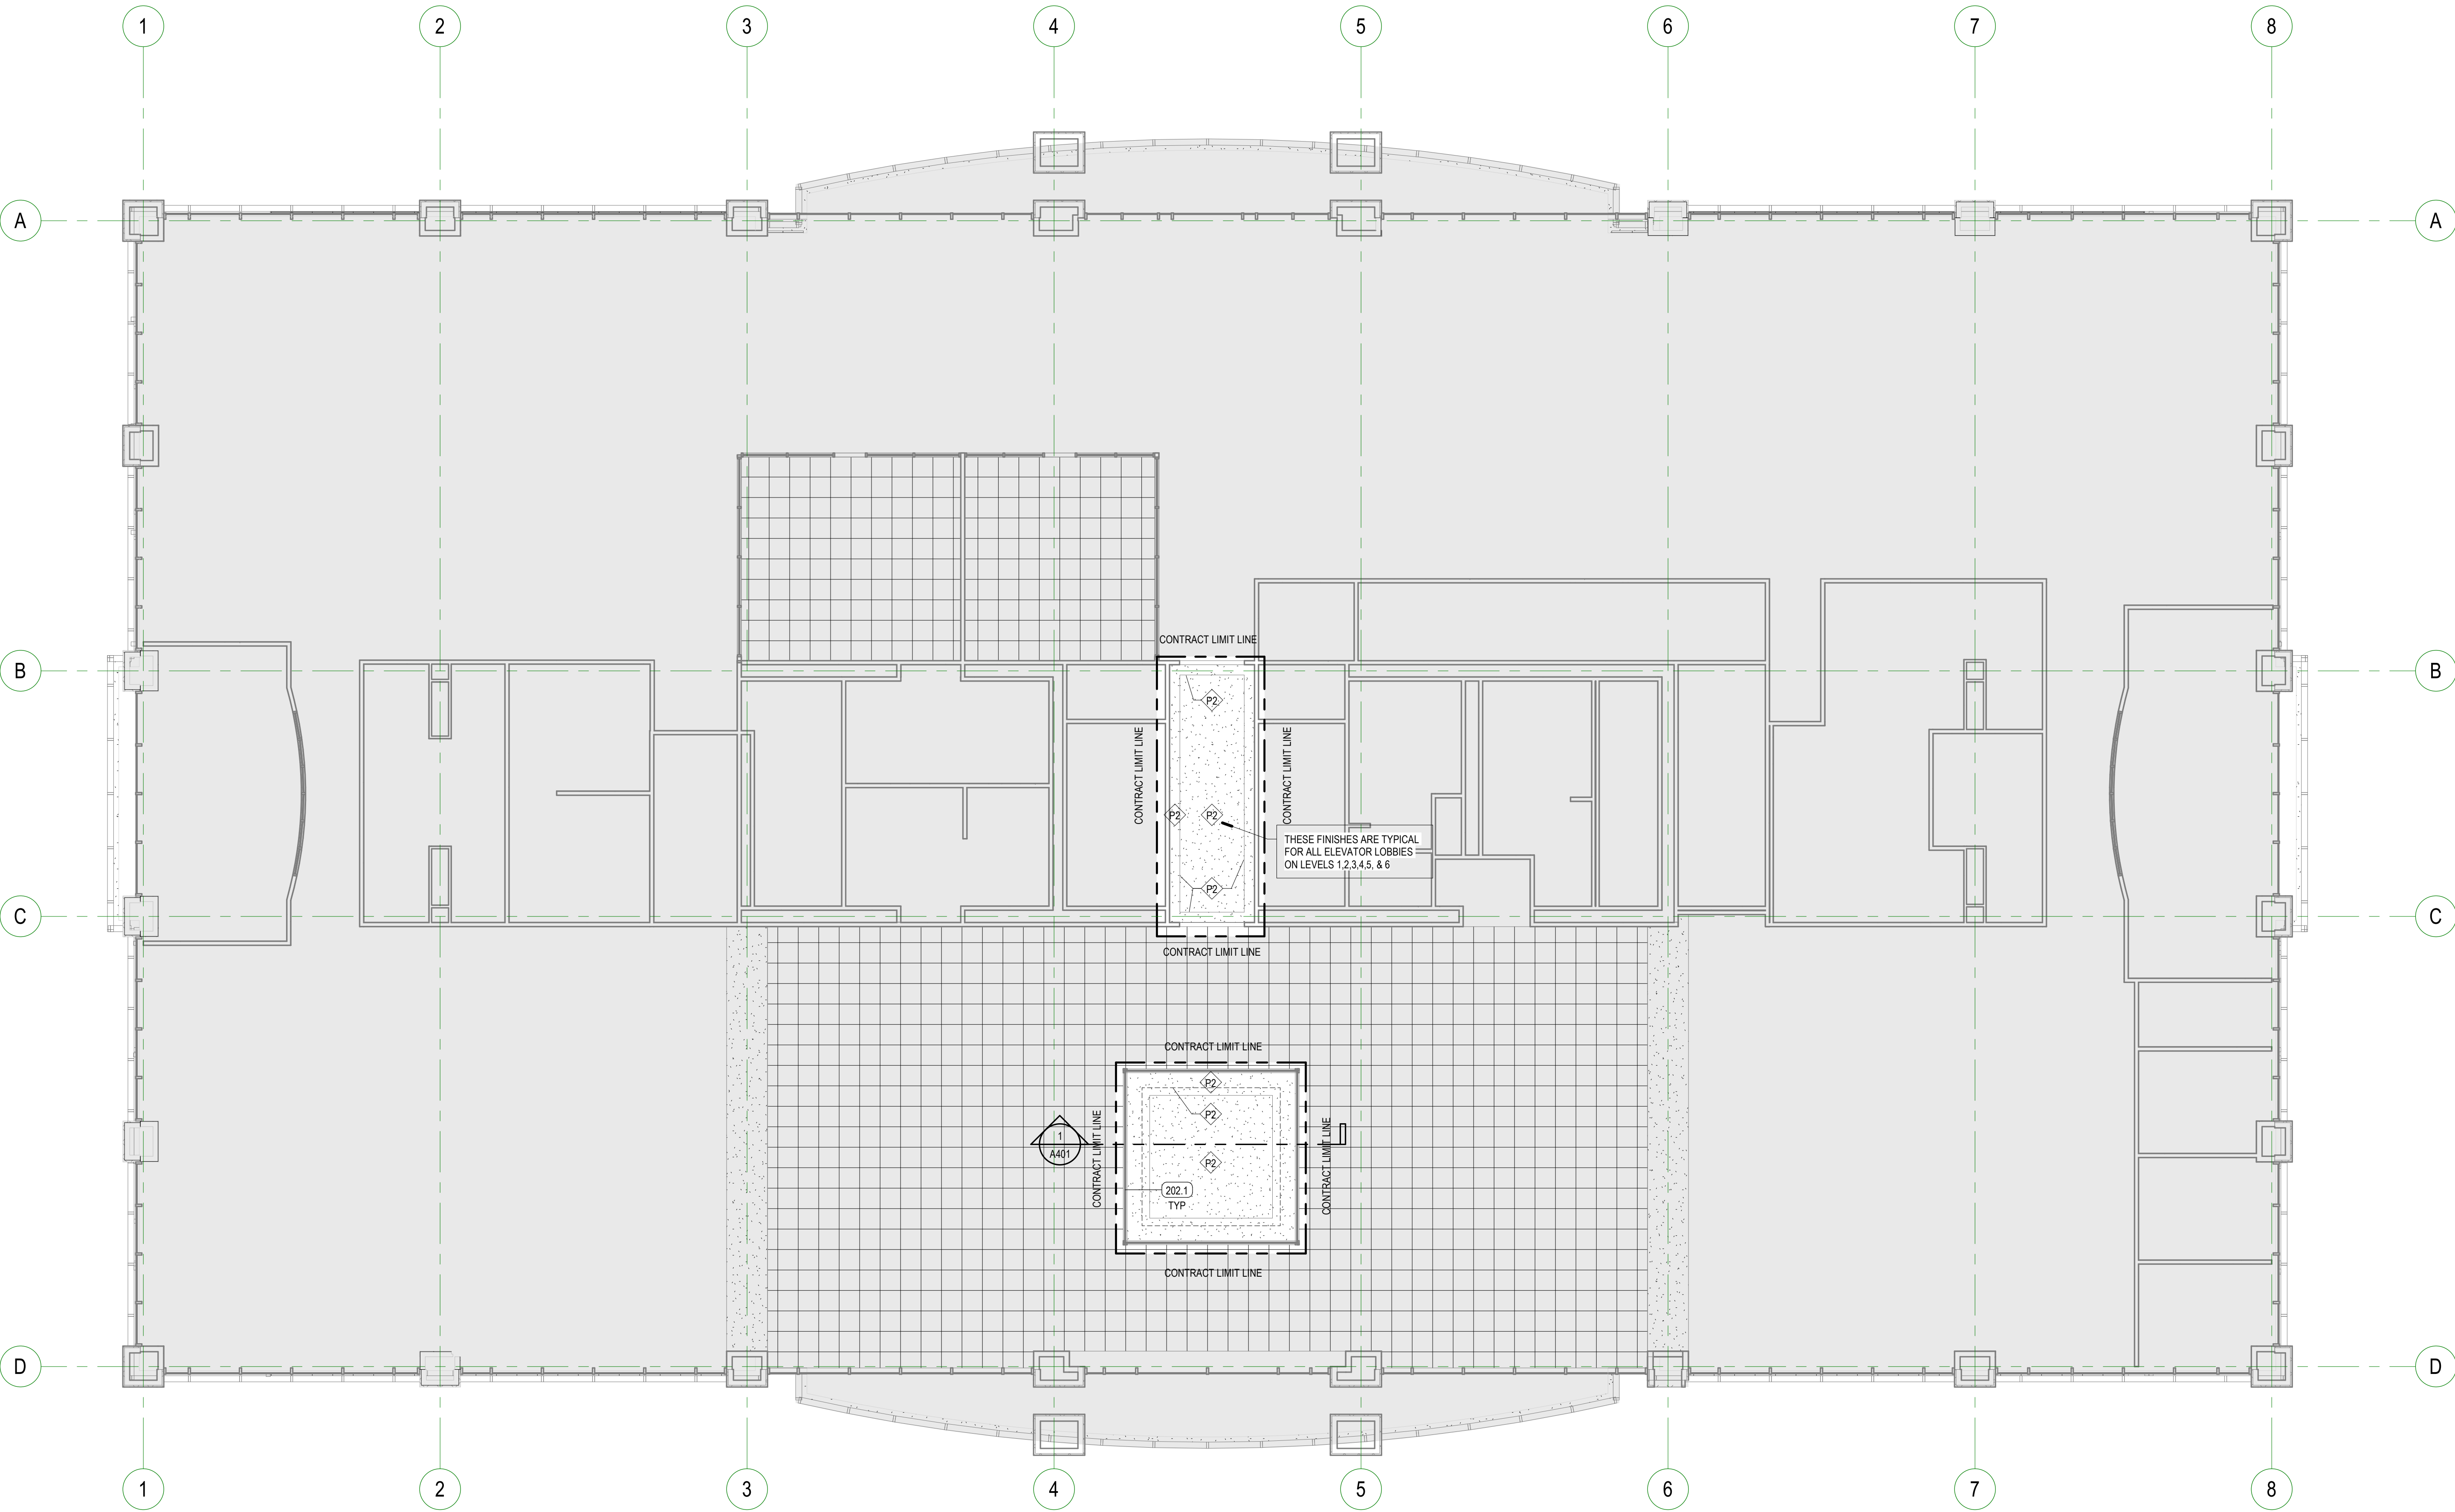

A1 REFLECTED CEILING PLAN - LEVEL 02

SCALE: 1/8" = 1'-0"

REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2022

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS

REFLECTED CEILING PLAN -
LEVEL 02

FINISH LEGEND					
Key Name	Finish - Description	Finish - Manufacturer	Finish - Name	Finish - Color	Finish - Comments
PAINT					
P1	GENERAL PAINT	SHERWIN WILLIAMS	6120 BELIEVABLE BUFF	LIGHT BEIGE	
P2	CEILING PAINT	SHERWIN WILLIAMS	6140 MODERATE WHITE	WHITE	
P3	H.M. DOOR FRAME PAINT	SHERWIN WILLIAMS	6120 BELIEVABLE BUFF	LIGHT BEIGE	
SURFACE					
S1	NOT USED				
S2	NOT USED				
WALL					
W1	GENERAL PAINT - SEE P1				
MISC					
CG1	CORNER GUARDS	KOROSEAL	KOROGARD GS75	STAINLESS STEEL	3/4" WING SIZE, 48" LONG, SURFACE MOUNT

KEYED NOTES

201.1	EXISTING WALL TILE BASE TO REMAIN, PROTECT AS REQUIRED
202.1	EXISTING WINDOW SYSTEM TO REMAIN, PROTECT AS REQUIRED
203.0	EXISTING WOOD CASEWORK TO REMAIN, PROTECT AS NECESSARY
204.0	EXISTING ACOUSTIC PANEL TO REMAIN, PROTECT AS NECESSARY
207.0	EXISTING DOOR TO REMAIN, PROTECT AS NECESSARY, REPAIR AS REQUIRED
1015.0	STAINLESS STEEL CORNER GUARD - REFER SPECIFICATIONS



REV	DATE	DESCRIPTION
-----	------	-------------

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2023

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS

ENLARGED PLANS +
ELEVATIONS, FINISH
SCHEULE

A401

1/14/2022 5:07:31 PM E:\Autodesk\2021\12\10\2021 - Elec Central - Lobby_01s_spectrum-engineers_com.rvt

E

D

C

B

A


SHEET INDEX, ABBREVIATIONS, AND GENERAL NOTES

EE001

SELECT HEALTH - LOBBY REMODEL
INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123
CONSTRUCTION DOCUMENTS

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2022

SPECTRUM ENGINEERS
324 S. State St., Suite 400
Salt Lake City, UT 84111
800-678-7077
801-328-5151
fax: 801-328-5155
www.spectrum-engineers.com

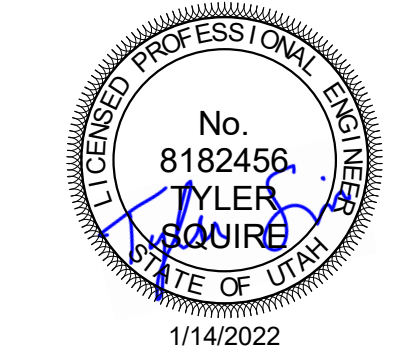

VCBO ARCHITECTURE
524 SOUTH 600 EAST
SALT LAKE CITY, UT 84102
801-575-8800
VCBO.COM

GENERAL ELECTRICAL NOTES

- CLARIFICATION METHODS: AT THE TIME OF BIDDING, BIDDERS SHALL FAMILIARIZE THEMSELVES WITH THE DRAWINGS AND SPECIFICATIONS. ANY QUESTIONS, MISUNDERSTANDINGS, CONFLICTS, DELETIONS, DISCONTINUED PRODUCTS, CATALOG NUMBER DISCREPANCIES, DISCREPANCIES BETWEEN THE EQUIPMENT SUPPLIED AND THE INTENT OR FUNCTION OF THE EQUIPMENT, ETC. SHALL BE SUBMITTED TO THE ARCHITECT/ENGINEER IN WRITING FOR CLARIFICATION PRIOR TO ISSUANCE OF THE FINAL ADDENDUM AND BIDDING OF THE PROJECT. WHERE DISCREPANCIES OR MULTIPLE INTERPRETATIONS OCCUR, THE MOST STRINGENT (WHICH IS GENERALLY RECOGNIZED AS THE MOST COSTLY) THAT MEETS THE INTENT OF THE DOCUMENTS SHALL BE ENFORCED.
- OWNER FURNISHED ITEMS: THE OWNER WILL FURNISH MATERIAL AND EQUIPMENT AS INDICATED IN THE CONTRACT DOCUMENTS TO BE INCORPORATED INTO THE WORK. THESE ITEMS ARE ASSIGNED TO THE INSTALLER AND COSTS FOR RECEIVING, HANDLING, STORAGE, IF REQUIRED, AND INSTALLATION ARE INCLUDED IN THE CONTRACT SUM.
 - THE INSTALLER'S RESPONSIBILITIES ARE THE SAME AS IF THE INSTALLER FURNISHED THE MATERIALS OR EQUIPMENT.
 - THE OWNER WILL ARRANGE AND PAY FOR DELIVERY OF OWNER FURNISHED ITEMS FREIGHT ON BOARD JOB SITE AND THE INSTALLER WILL INSPECT DELIVERIES FOR DAMAGE. IF OWNER FURNISHED ITEMS ARE DAMAGED, DEFECTIVE OR MISSING, DOCUMENT DAMAGED ITEMS WITH THE TRANSPORT COMPANY AND THE OWNER WILL ARRANGE FOR REPLACEMENT. THE OWNER WILL ALSO ARRANGE FOR MANUFACTURER'S FIELD SERVICES, AND THE DELIVERY OF MANUFACTURER'S WARRANTIES AND BONDS TO THE INSTALLER.
 - THE INSTALLER IS RESPONSIBLE FOR DESIGNATING THE DELIVERY DATES OF OWNER FURNISHED ITEMS AND FOR RECEIVING, UNLOADING AND HANDLING OWNER FURNISHED ITEMS AT THE SITE. THE INSTALLER IS RESPONSIBLE FOR PROTECTING OWNER FURNISHED ITEMS FROM DAMAGE, INCLUDING DAMAGE FROM EXPOSURE TO THE ELEMENTS, AND TO REPAIR OR REPLACE ITEMS DAMAGED AS A RESULT OF HIS OPERATIONS.
- EXPOSED STRUCTURE AREAS (EXCLUDING MECHANICAL, ELECTRICAL, AND COMMUNICATION SPACES): INSTALL RACEWAYS BETWEEN DECK AND STRUCTURE WHEREVER POSSIBLE IN EXPOSED STRUCTURE CEILING AREAS. ROUTE RACEWAYS IN CONCEALED AREAS WHENEVER POSSIBLE. REFER ALL CONDITIONS WHERE RACEWAYS MUST BE INSTALLED WHICH CANNOT COMPLY WITH THESE REQUIREMENTS TO THE ARCHITECT.
- SUBMITTALS: PROVIDE ORIGINAL ELECTRONIC PDF FORMAT, BOUND, BOOKMARKED (EACH SECTION AND PRODUCT), AND HIGHLIGHTED. JOB NAME AND SUBCONTRACTOR SHALL BE ON THE FRONT COVER. PREPARE INDEX OF EQUIPMENT SUBMITTED IN EACH TAB.
- REFLECTED CEILING PLANS: COORDINATE THE LOCATION OF LIGHT FIXTURES WITH THE ARCHITECTURAL REFLECTED CEILING PLANS. REFER ALL DISCREPANCIES TO THE ARCHITECT AND ENGINEER.
- ALL WORK SHALL BE DONE ACCORDING TO THE CURRENT NATIONAL ELECTRIC CODE (NEC), IBC, NFPA, AND IFC. COMPLIANCE AND FINAL APPROVAL IS SUBJECT TO THE ON SITE FIELD INSPECTION OF THE A/E.

ELECTRICAL SHEET INDEX

EE001	SHEET INDEX, ABBREVIATIONS, AND GENERAL NOTES
ED101	LIGHTING DEMOLITION PLANS
EL101	LIGHTING PLANS

DEFINITIONS

NOTE: ALL DEFINITIONS MAY NOT BE USED.

INDICATED: THE TERM "INDICATED" REFERS TO GRAPHIC REPRESENTATIONS, NOTES, OR SCHEDULES ON THE DRAWINGS, OTHER PARAGRAPHS OR SCHEDULES IN THE SPECIFICATIONS, AND SIMILAR REQUIREMENTS IN THE CONTRACT DOCUMENTS. WHERE TERMS SUCH AS "SHOWN", "NOTED", "SCHEDULED", AND "SPECIFIED" ARE USED, IT IS TO HELP THE READER LOCATE THE REFERENCE, NO LIMITATION ON LOCATION IS INTENDED.

DIRECTED: TERMS SUCH AS "DIRECTED", "REQUESTED", "AUTHORIZED", "SELECTED", "APPROVED", "REQUIRED", AND "PERMITTED" MEAN "DIRECTED BY THE ENGINEER", "REQUESTED BY THE ENGINEER", AND SIMILAR PHRASES.

APPROVED: THE TERM "APPROVED", WHERE USED IN CONJUNCTION WITH THE ENGINEER'S ACTION ON THE CONTRACTOR'S SUBMITTALS, APPLICATIONS, AND REQUESTS, IS LIMITED TO THE ENGINEER'S DUTIES AND RESPONSIBILITIES AS STATED IN GENERAL AND SUPPLEMENTARY CONDITIONS.

FURNISH: THE TERM "FURNISH" IS USED TO MEAN "SUPPLY AND DELIVER TO THE PROJECT SITE, READY FOR UNLOADING, UNPACKING, ASSEMBLY, INSTALLATION, AND SIMILAR OPERATIONS."

INSTALL: THE TERM "INSTALL" IS USED TO DESCRIBE OPERATIONS AT PROJECT SITE INCLUDING THE ACTUAL "UNLOADING, UNPACKING, ASSEMBLY, ERECTION, PLACING, ANCHORING, APPLYING, WORKING TO DIMENSION, FINISHING, CURING, PROTECTING, CLEANING, AND SIMILAR OPERATIONS."

PROVIDE: THE TERM "PROVIDE" MEANS "TO FURNISH AND INSTALL, COMPLETE AND READY FOR THE INTENDED USE."

INSTALLER: AN "INSTALLER" IS THE CONTRACTOR OR AN ENTITY ENGAGED BY THE CONTRACTOR, EITHER AS AN EMPLOYEE, SUBCONTRACTOR, OR SUB-SUBCONTRACTOR, FOR PERFORMANCE OF A PARTICULAR CONSTRUCTION ACTIVITY, INCLUDING INSTALLATION, ERECTION, APPLICATION, AND SIMILAR OPERATIONS. INSTALLERS ARE REQUIRED TO BE EXPERIENCED IN THE OPERATIONS THEY ARE ENGAGED TO PERFORM.

TECHNOLOGY SYSTEMS: THE TERM "TECHNOLOGY SYSTEMS" IS USED TO DESCRIBE ALL LOW VOLTAGE SYSTEMS GENERALLY REFERRED TO AS "SPECIAL SYSTEMS". THESE SYSTEMS INCLUDE BUT ARE NOT NECESSARILY LIMITED TO ALL SYSTEMS WHICH UTILIZE VOLTAGES OF LESS THAN 71 VOLTS SUCH AS SOUND SYSTEMS, VIDEO SYSTEMS, TV SYSTEMS, SECURITY SYSTEMS, VOICE AND DATA CABLING SYSTEMS, ETC....

SYMBOLS LEGEND

SYMBOL	DESCRIPTION
LIGHTING	
(W-3)	FIXTURE IDENTIFICATION: (W-3) INDICATES FIXTURE TYPE AS SCHEDULED.
(W-3)	FIXTURE IDENTIFICATION, EMERGENCY WITH BATTERY PACK, CONNECTED TO GENERATOR AS INDICATED. (W-3) INDICATES FIXTURE TYPE AS SCHEDULED.
EM	EMERGENCY.
NL	NIGHT LIGHT: DO NOT SWITCH.
↑	EGRESS DIRECTION ARROW (EXIT SIGNS).
EXIT SIGN: SINGLE FACE; CEILING MOUNTED	
EXIT SIGN: DOUBLE FACE; CEILING MOUNTED	
EXIT SIGN: DOUBLE FACE; WALL MOUNTED	
LIGHTING CONTROL	
⋆	OCCUPANCY SENSOR, DUAL TECHNOLOGY, OMNI-DIRECTIONAL, CEILING.
⋆	OCCUPANCY SENSOR, DUAL TECHNOLOGY, WALL.
⋆	OCCUPANCY SENSOR, DUAL TECHNOLOGY, DIRECTIONAL.
(P)	PHOTOCELL.
(P)	PHOTOCELL, WALL MOUNTED.
⋆	VACANCY SENSOR, DUAL TECHNOLOGY, OMNI-DIRECTIONAL, CEILING.
⋆	VACANCY SENSOR, DUAL TECHNOLOGY, WALL.
⋆	CEILING FAN.
⋆	SWITCH/OCCUPANCY SENSOR COMBO, DUAL TECHNOLOGY, WALL.
⋆	SWITCH/VACANCY SENSOR COMBO, DUAL TECHNOLOGY, WALL.
⋆	DIMMER SWITCH/OCCUPANCY SENSOR COMBO, DUAL TECHNOLOGY, WALL.
⋆	DIMMER SWITCH/VACANCY SENSOR COMBO, DUAL TECHNOLOGY, WALL.
a.b	LOW VOLTAGE DIGITAL LIGHTING CONTROL SWITCH: LETTER "a,b" INDICATES ZONING WHERE SHOWN (REFER TO PLANS, SCHEDULES, AND DETAILS FOR EXACT BUTTON CONFIGURATION AND PROGRAMMING REQUIREMENTS)
RC	DIGITAL LIGHTING ROOM CONTROLLER
DC	DIGITAL LIGHTING DIMMING CONTROLLER
LC	DIGITAL PLUG LOAD CONTROLLER
LS	LIGHTING NETWORK SWITCH.
NR	LIGHTING NETWORK ROUTER.
SM	LIGHTING NETWORK SEGMENT MANAGER
NB	LIGHTING NETWORK BRIDGE
ET	LIGHTING EMERGENCY TRANSFER DEVICE
LI X	LIGHTING SPACE CONTROL TYPE: X INDICATES TYPE. SEE SCHEDULE / DIAGRAM.

SYMBOLS LEGEND

SYMBOL	DESCRIPTION
REFERENCE AND LINE SYMBOLS	
A5 E-501	DETAIL INDICATOR: A5 INDICATES DETAIL NUMBER, E-501 INDICATES DRAWING SHEET WHERE DETAIL IS SHOWN.
A5 E-201	ELEVATION OR SECTION INDICATOR, EXTERIOR: A5 INDICATES ELEVATION OR SECTION NUMBER, E-201 INDICATES DRAWING SHEET WHERE ELEVATION OR SECTION IS SHOWN.
A5 E-201	ELEVATION OR SECTION INDICATOR, INTERIOR: A5 INDICATES ELEVATION OR SECTION NUMBER, E-201 INDICATES DRAWING SHEET WHERE ELEVATION OR SECTION IS SHOWN.
ROOM NAME 100	ROOM IDENTIFIER WITH ROOM NAME AND NUMBER
1	KEYNOTE INDICATOR.
△	REVISION INDICATOR.
—	BREAK, STRAIGHT: TO BREAK PARTS OF DRAWING
—	BREAK, ROUND
MATCH LINE SEE XXX.XXX	MATCH LINE INDICATOR: CENTER, EXTRA WIDE LINE.
—	NEW LINE: MEDIUM LINE.
—	HIDDEN FEATURES LINE: HIDDEN, THIN LINE
—	EXISTING TO REMAIN LINE: THIN LINE.
-----	DEMOLITION LINE: DASHED, MEDIUM LINE
- - -	CONTRACT LIMIT LINE: DASHDOT, WIDE LINE.
WIRING METHODS	
—	WIRING.
—	WIRING TURNED UP OR TOWARDS OBSERVER.
—	WIRING TURNED DOWN OR AWAY FROM OBSERVER.
A-1	SINGLE BRANCH CIRCUIT HOME RUN TO PANELBOARD WITH DEDICATED NEUTRAL CONDUCTOR. LETTER AND NUMBER NOTATION IDENTIFY PANEL AND CIRCUIT NUMBER.
A-1,3,5	BRANCH CIRCUIT HOME RUN TO PANELBOARD: NUMBER OF ARROWS INDICATES NUMBER OF CIRCUITS. LETTER AND NUMBER NOTATIONS IDENTIFY PANEL AND CIRCUIT NUMBERS.
1 A-1,3,5	BRANCH CIRCUIT HOME RUN TO PANELBOARD: NUMBER OF ARROWS INDICATES NUMBER OF CIRCUITS. LETTER AND NUMBER NOTATIONS IDENTIFY PANEL AND CIRCUIT NUMBERS. NUMBER IN BOX REFERS TO THE CONDUCTOR AND CONDUIT SCHEDULE.
-----	LOW VOLTAGE WIRING: DIVIDE, MEDIUM LINE.
+	CONDUIT STUB. DIMENSION RECORD DRAWINGS AND MARK.
1	CONDUCTOR & CONDUIT ("CC") SCHEDULE INDICATOR. REFER TO ONE-LINE DIAGRAM.
(HC)	ADA ACCESS PUSH PLATE
□	JUNCTION BOX.
□	JUNCTION BOX, CEILING.
A"xB" +/-C"-D"	CABLE TRAY ABOVE ACCESSIBLE CEILING. "A" DENOTES CABLE TRAY WIDTH, "B" DENOTES CABLETRAY DEPTH. +/-C"-D" DENOTES CABLE TRAY ELEVATION ABOVE OR BELOW FINISHED SURFACE.
	LADDER RACK.
I I	GROUND BUSBAR. REFER TO GROUNDING RISER DIAGRAM FOR ADDITIONAL INFORMATION.

INTERIOR LIGHTING FIXTURE SCHEDULE ABBREVIATIONS

MOUNTING	LUMINAIRE OPTIONS	FINISH	DIFFUSER/LENS	REFLECTOR
B - BASE C - CEILING F - FLANGE G - GRID P - PENDANT PL - POLE R - RECESSED S - SURFACE W - WALL	ARRH - AIR RETURN AND HEAT REJECTION DL - DAMP LOCATION EQC - EARTHQUAKE CLIPS F - FUSING HLD - HINGED AND LATCHED DOOR HS - HOUSE SIDE SHIELD PS - PHOTOCELL SWITCH QRS - QUARTZ RESTRIKE ST - STATIC WG - WIRE GUARD WL - WET LOCATION	MW - MATTE WHITE BL - BLACK SL - SILVER GL - GOLD CL - CLEAR PW - PAINTED WHITE EA - EXTRUDED ALUMINUM S - STEEL GS - GALVANIZED STEEL C - CAST CBA - COLOR BY ARCHITECT SCBA - STANDARD COLOR BY ARCHITECT CCA - CUSTOM COLOR BY ARCHITECT FS - MEETS FEDERAL STANDARD 209D TP - THERMALLY PROTECTED FL - FLUSH R - REGRESS M - MITERED	RA - ACRYLIC #THICK (OPAL) ROR - ACRYLIC #THICK (OPAL) GC - GLASS (CLEAR) GO - GLASS (OPAL) GF - GLASS (FROSTED) SG - SOFT GLOW LENS HPL - HIGH PERFORMANCE LENS DO - DROP OPAL CGL - CONVEX GLASS LENS S - SATIN LENS	OP - NONE/OPEN SP - SPECULAR SS - SEMI-SPECULAR D - DIFFUSE (WHITE ENAMEL) SC - SPECULAR (COLORED) PR - PRISMATIC FDR - FULL DEPTH REFLECTOR DS - DIFFUSE (SEMI SPECULAR) SILVER LI - LOW IRIDESCENT IR - IRIDESCENT SL - SILVER GL - GOLD CA - CLEAR ALZAK


GENERAL NOTES

- PROVIDE UNIT PRICES AND FIXTURE BRAND SELECTED FOR ADD/DELETE CHANGES FOR EACH FIXTURE TYPES SHOWN WITHIN 48 BUSINESS HOURS OF THE BID DATE. FAILURE TO COMPLY WITH THIS REQUIREMENT MAY DISQUALIFY THE PRODUCTS AND EMPOWER THE ENGINEER TO DETERMINE FAIR VALUE FOR FIXTURE AND INSTALLATION CHANGES, WITHOUT FURTHER INPUT FROM THE CONTRACTOR OR INSTALLER.
- CONTRACTOR ALLOWANCE PRICES ARE ACCURATE WHEN THIS JOB WAS SPECIFIED. CONTRACTOR AND ELECTRICAL DISTRIBUTOR SHALL VERIFY THIS ALLOWANCE AND REPORT ANY PROBLEMS TO THE ENGINEER BEFORE THE BID. ALLOWANCE PRICE MAY OR MAY NOT INCLUDE LAMP(S) OR FREIGHT AS NOTED, AND DO NOT INCLUDE ANY TAXES.
- SUBSTITUTIONS AND/OR EQUAL FIXTURES MUST RECEIVE APPROVAL PRIOR TO BIDDING. THEY MUST BE SUBMITTED TO THE ENGINEER NO LESS THAN 2 WEEKS PRIOR TO BID OPENING.
- SAMPLES MUST BE PROVIDED FOR ANY AND ALL FIXTURES UPON A/E REQUEST PRIOR TO RELEASING FIXTURES.
- ALL FIXTURES SHALL BE LISTED AND APPROVED FOR THEIR INTENDED USE AND LOCATION.
- VERIFY THE PROPER MOUNTING KITS OR ACCESSORIES TO FACILITATE INSTALLATION AS SHOWN AT EACH LOCATION ON THE DRAWINGS.
- COMPLY WITH THE "INTERIOR LIGHTING" SECTION OF THE SPECIFICATIONS.
- REFER TO SPECIFICATIONS FOR IMPORTANT TECHNICAL REQUIREMENTS FOR LIGHTING FIXTURES, DRIVERS, AND LAMPS.
- ALL LIGHT FIXTURES TO BE EITHER "DLC" OR "LIGHTING FACTS" LISTED OR TO BE APPROVED BY ARCHITECT/ENGINEER AND OWNER.


		NOMINAL SIZE				MANUFACTURER (CATALOG SERIES)											
ID	DESCRIPTION	LENGTH	DEPTH	HEIGHT	DIAMETER/ APERTURE	MOUNTING	TYPE	COLOR TEMP	CRI	DRIVER CONFIGURATION	VOLTAGE	WATTS	FINISH	FIXTURE LUMENS	DIFFUSER/LENS	REFLECTOR	OPTIONS
(TX-1)	DECORATIVE LED PENDANT FIXTURE, 27.5" DIAMETER.				27.5"	C,P		3500K		LED DRIVER (0-10V DIMMING)		60		5280			
(TX-2)	DECORATIVE LED PENDANT FIXTURE, 39.5" DIAMETER				39.5"	C,P				LED DRIVER (0-10V DIMMING)		108		9504			
(WS)	DECORATIVE LED WALL SCONCE. EXACT FIXTURE TBD.											0		0			

1/14/2022 5:07:34 PM E:\Autodesk\2021\210701 - Elec Central - Lobby - Use_spectrum-engineers.com.rvt


A3 LEVEL 3 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

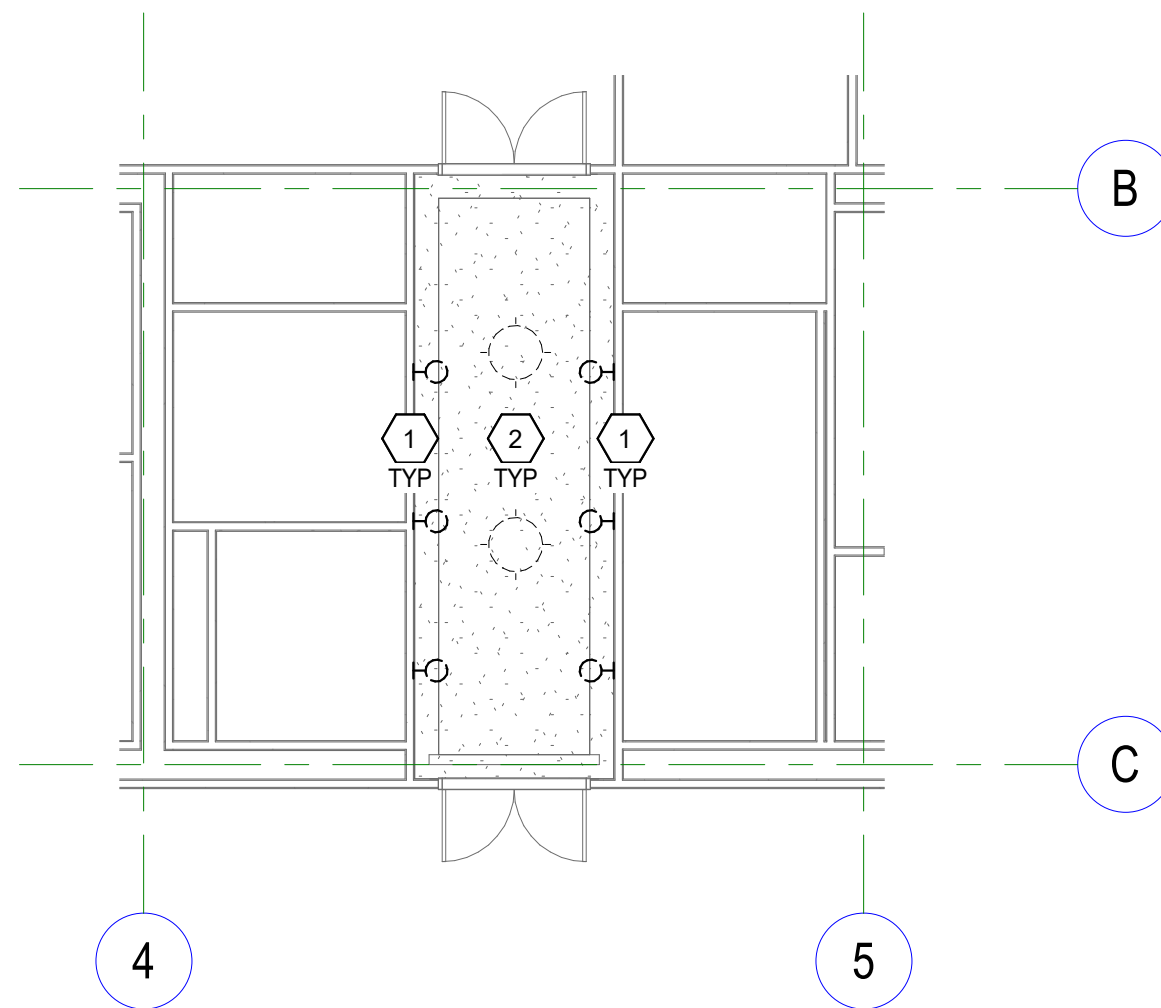


B3 LEVEL 4 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

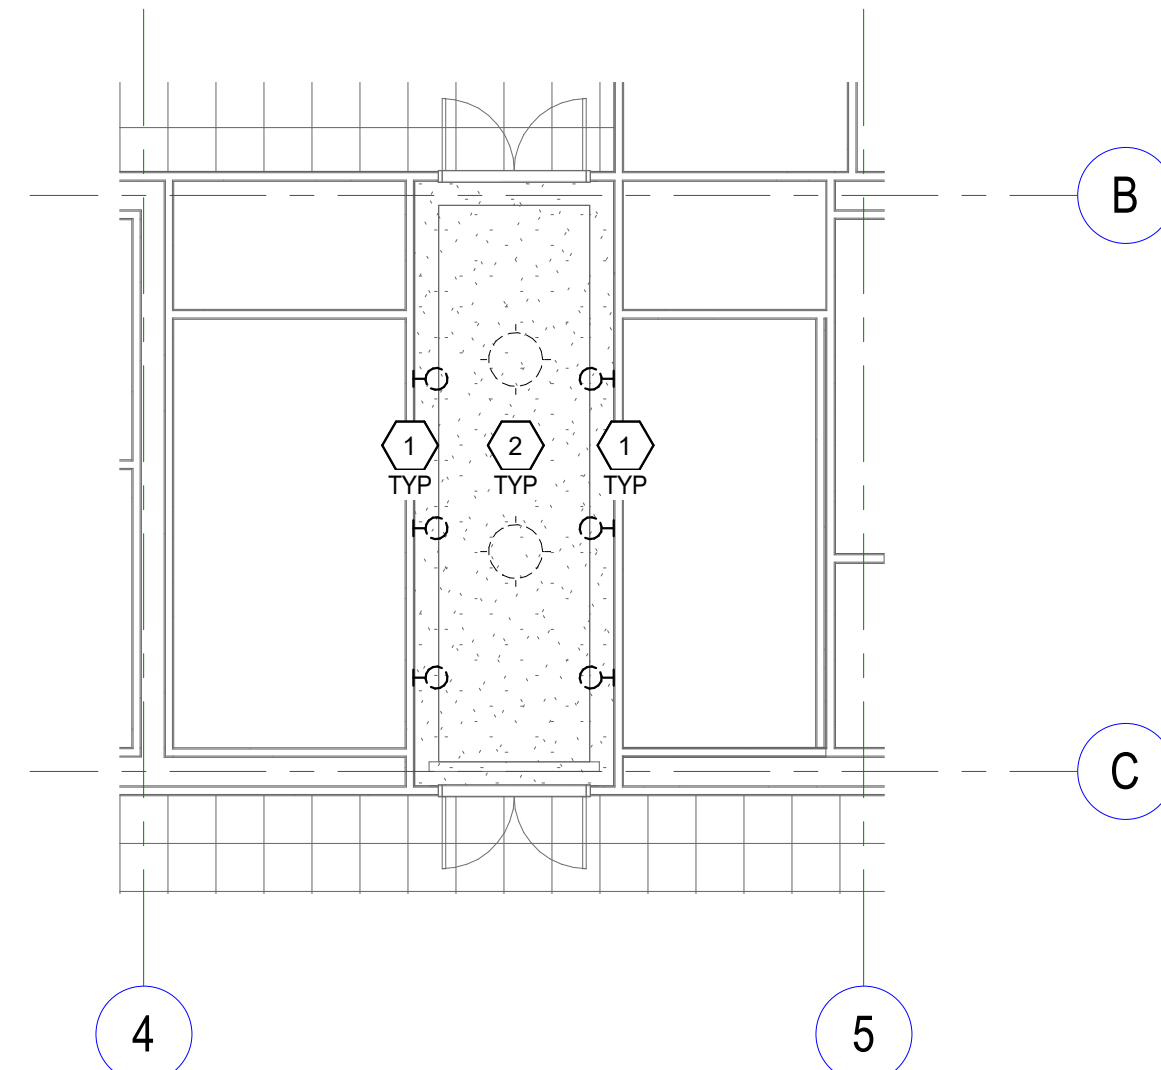


C3 LEVEL 5 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

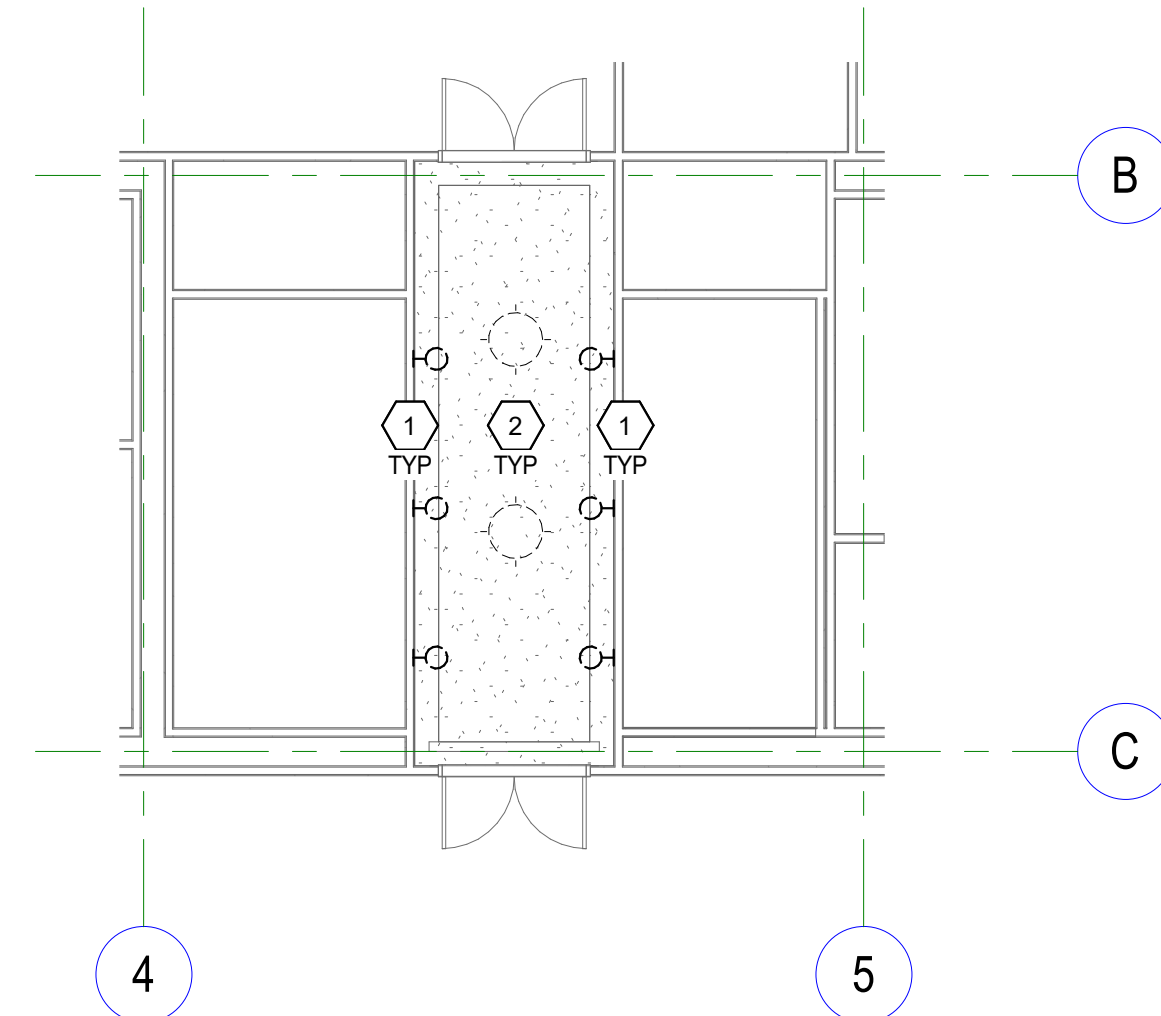


D3 LEVEL 6 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

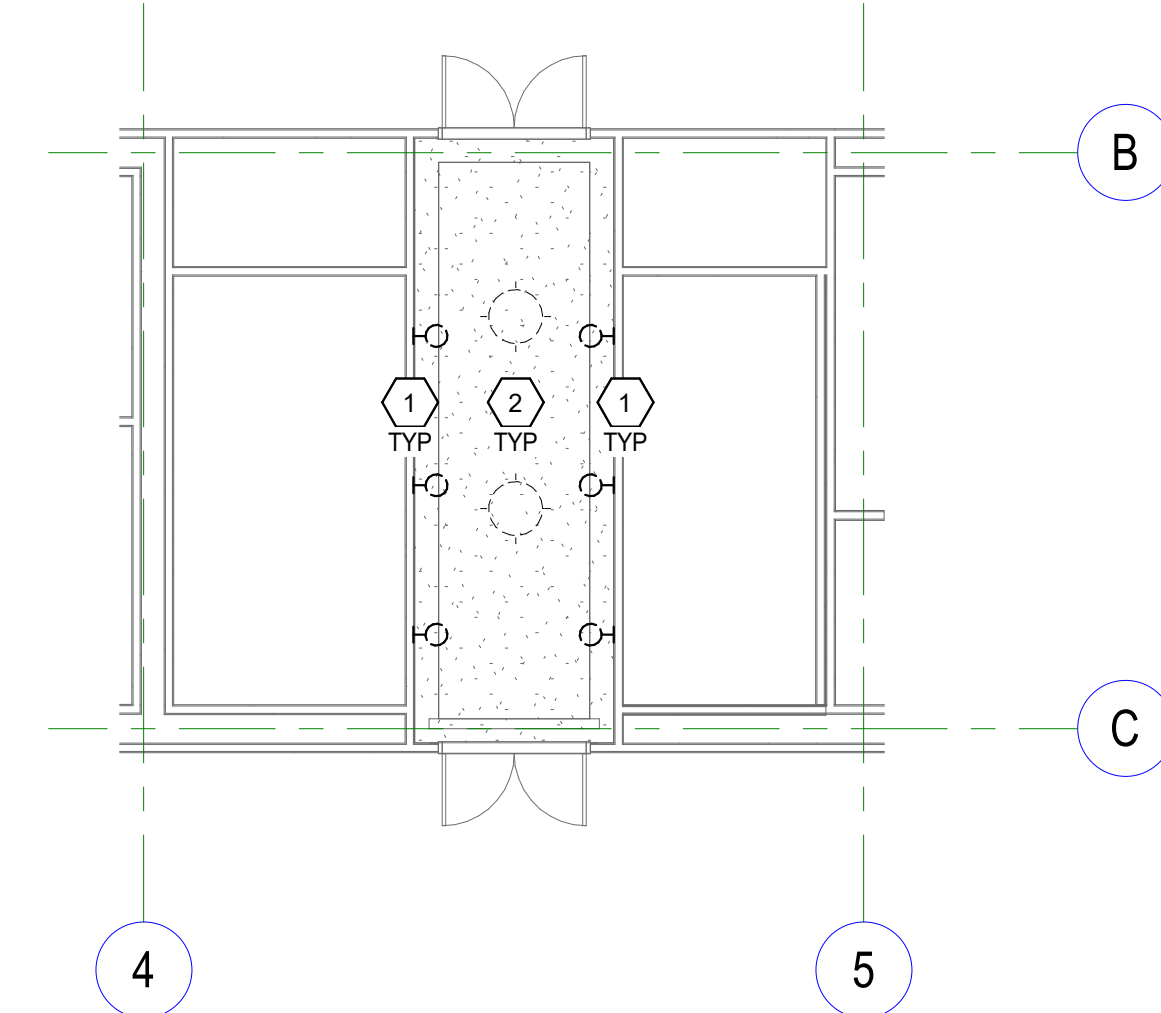

A5 LEVEL 1 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

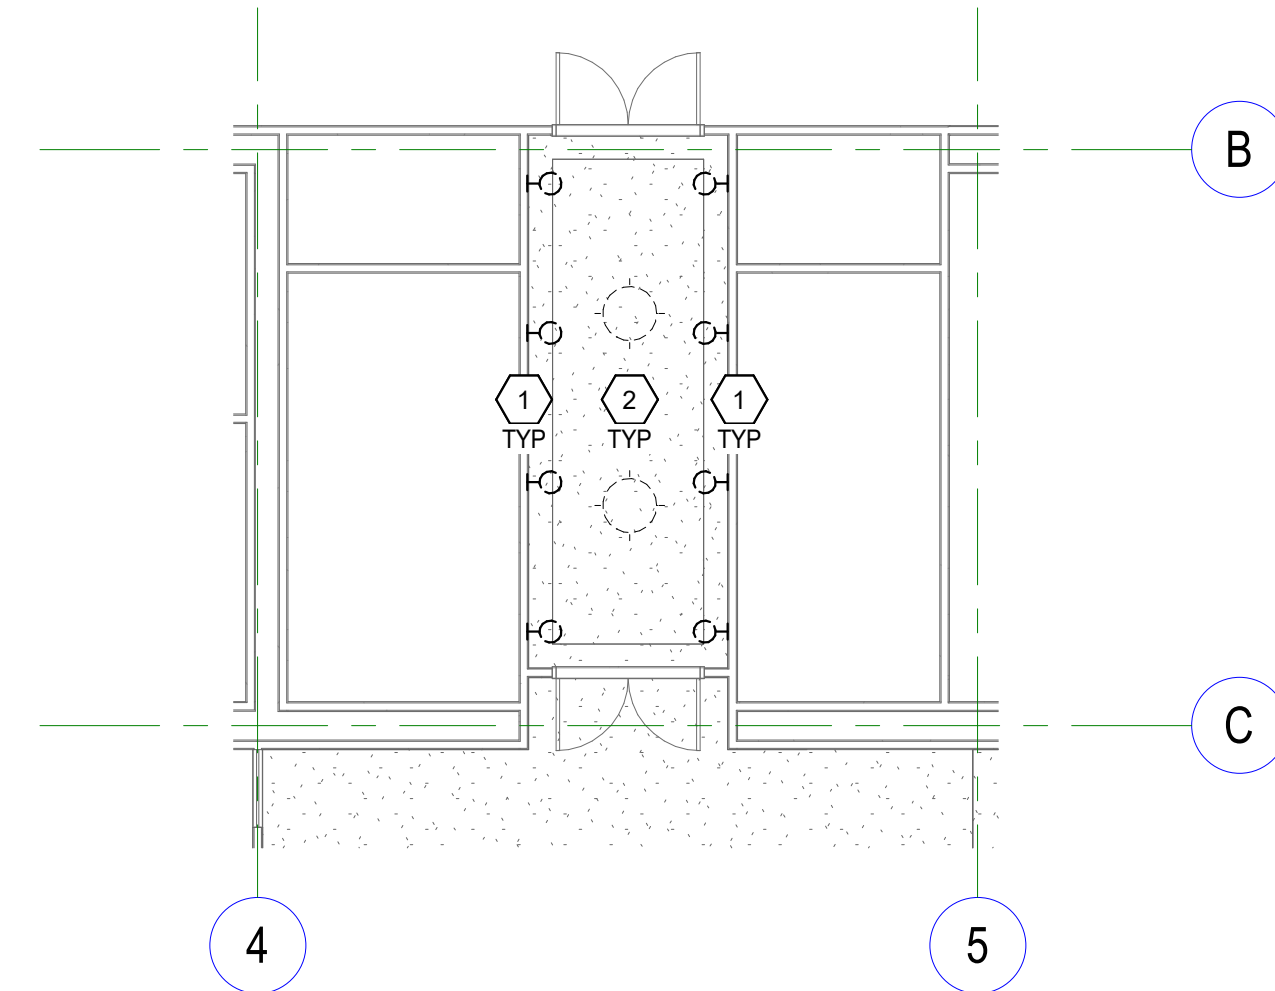

B5 LEVEL 2 CEILING DEMOLITION PLAN - LOBBY
SCALE: 1/8" = 1'-0"

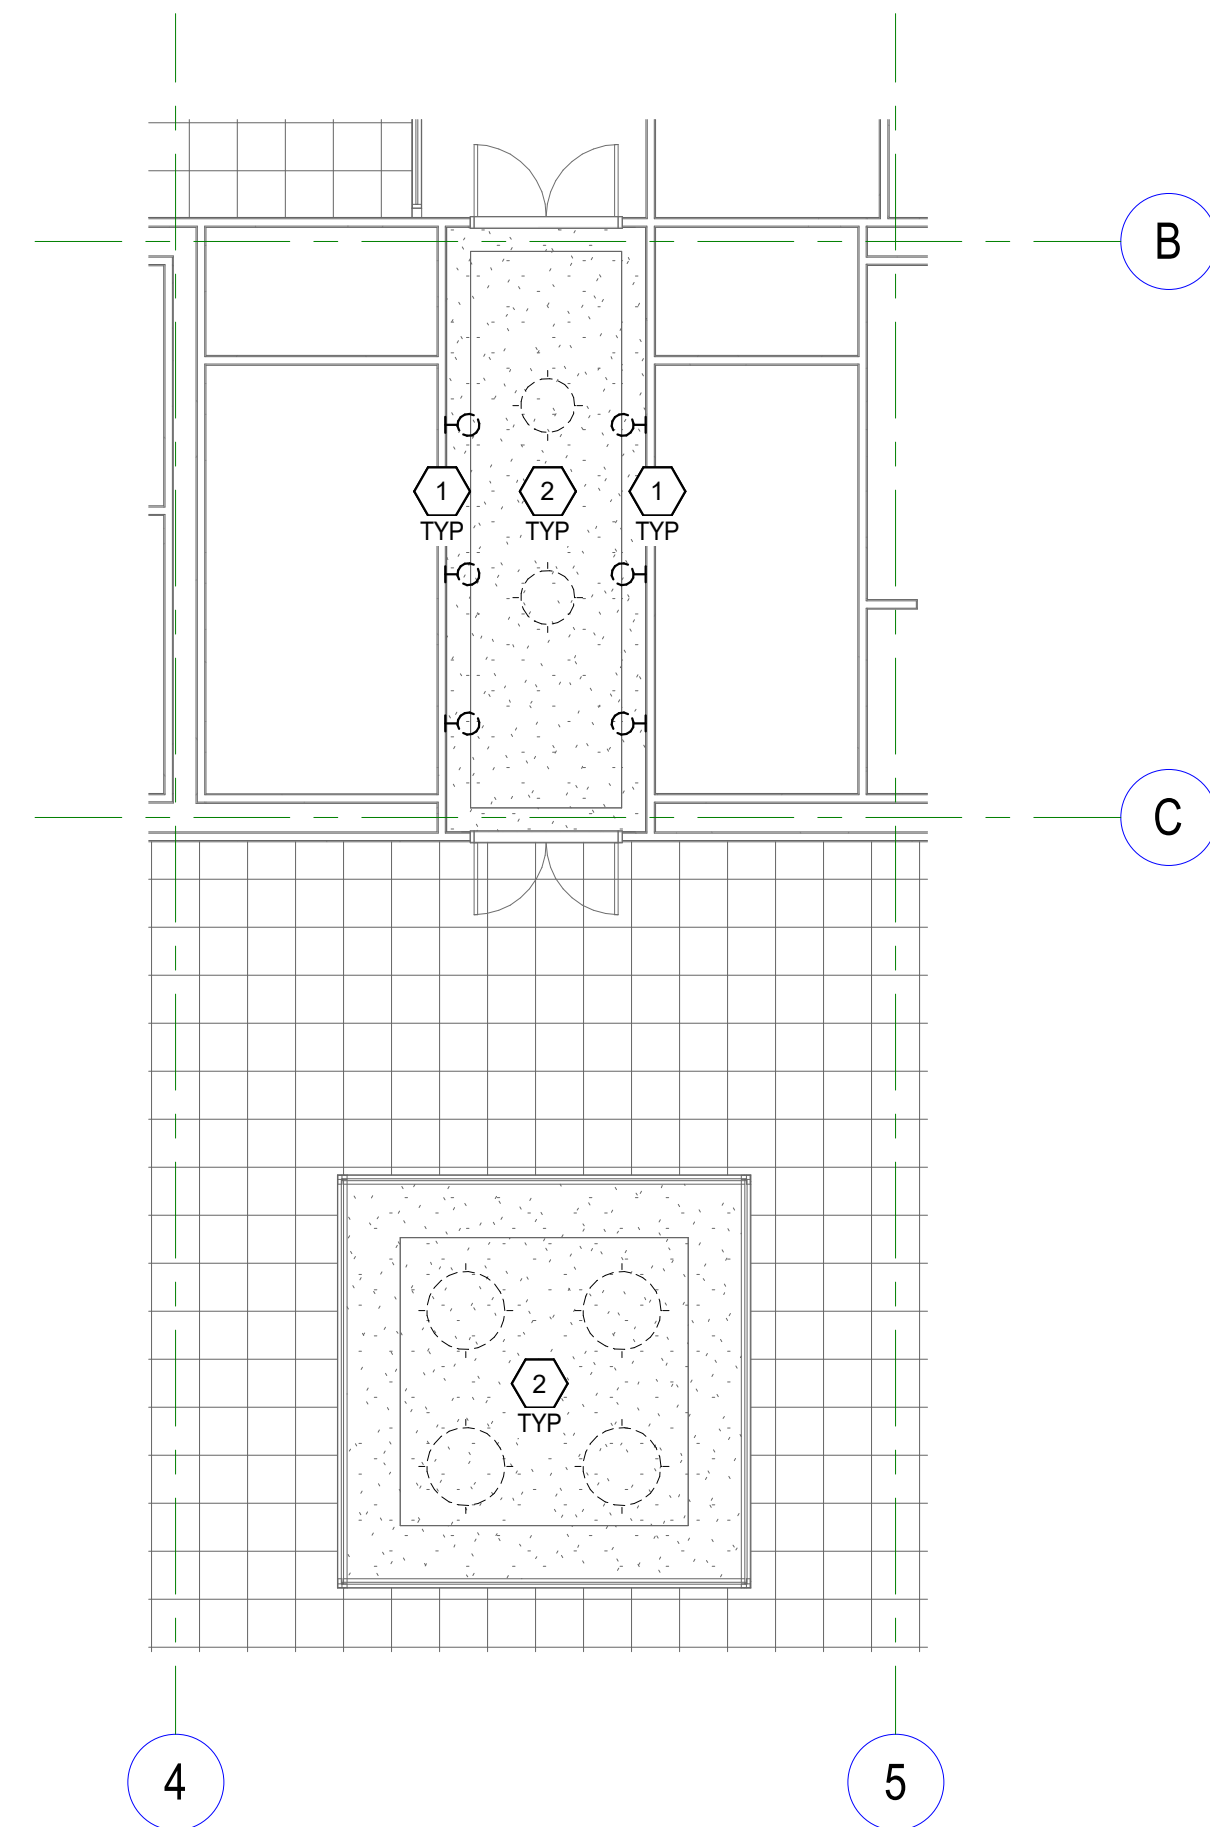

SHEET KEYNOTES

- 1 REMOVE EXISTING WALL SCONCE FIXTURES AND REPLACE WITH NEW LED WALL SCONCES IN SAME PLACE. MAINTAIN EXISTING CIRCUITING AND CONTROLS.
- 2 REMOVE EXISTING DECORATIVE PENDANT FIXTURES AND REPLACE WITH NEW LED PENDANT FIXTURES IN SAME PLACE. MAINTAIN EXISTING CIRCUITING AND CONTROLS.

GENERAL SHEET NOTES

- 1 UNLESS NOTED OTHERWISE REMOVE ALL LIGHTING FIXTURES DEVICES AND EQUIPMENT SHOWN DASHED. REMOVE CONDUIT AND WIRING BACK TO PANELBOARD OF ORIGIN OR TO FIRST ACTIVE DEVICE THAT REMAINS.
- 2 SALVAGE ALL LIGHT FIXTURES, TWIST-LOCK RECEPTACLES AND WALLPLATES, CEILING SPEAKERS AND SECURITY AND FIRE ALARM DEVICES TO OWNER. PROTECT SALVAGED EQUIPMENT FROM DAMAGE.
- 3 PRIOR TO SUBMITTING BID, VISIT THE SITE AND FIELD VERIFY THE EXTENT OF ELECTRICAL DEMOLITION WORK TO MEET THE INTENT OF THE BID DOCUMENTS AND INCLUDE ALL COSTS IN BID.
- 4 PRIOR TO REMOVAL OF ANY ELECTRICAL EQUIPMENT OR WIRING, FIELD VERIFY THAT THE EQUIPMENT OR WIRING IS INACTIVE OR NO LONGER IN USE.

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5881 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS


LIGHTING DEMOLITION
PLANS

ED101

VCBO NUMBER: 20235.01
CLIENT NUMBER: 00000
DATE: 01-15-2022

REV DATE DESCRIPTION


SPECTRUM
ENGINEERS
324 S. State St., Suite 400
Salt Lake City, UT 84111
800-678-7077
801-328-5151
fax: 801-328-5155
www.spectrum-engineers.com

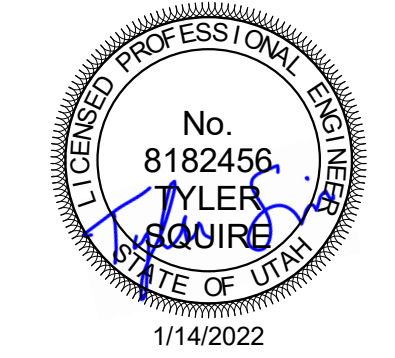


VCBO
ARCHITECTURE
524 SOUTH 600 EAST
SALT LAKE CITY, UT 84102
801-575-8800
VCBO.COM

1/14/2022 5:07:38 PM E:\Autodesk\2021\1210701 - Elec Central Lobby Use_spectrum-engineers.com.rvt


A3 LEVEL 3 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

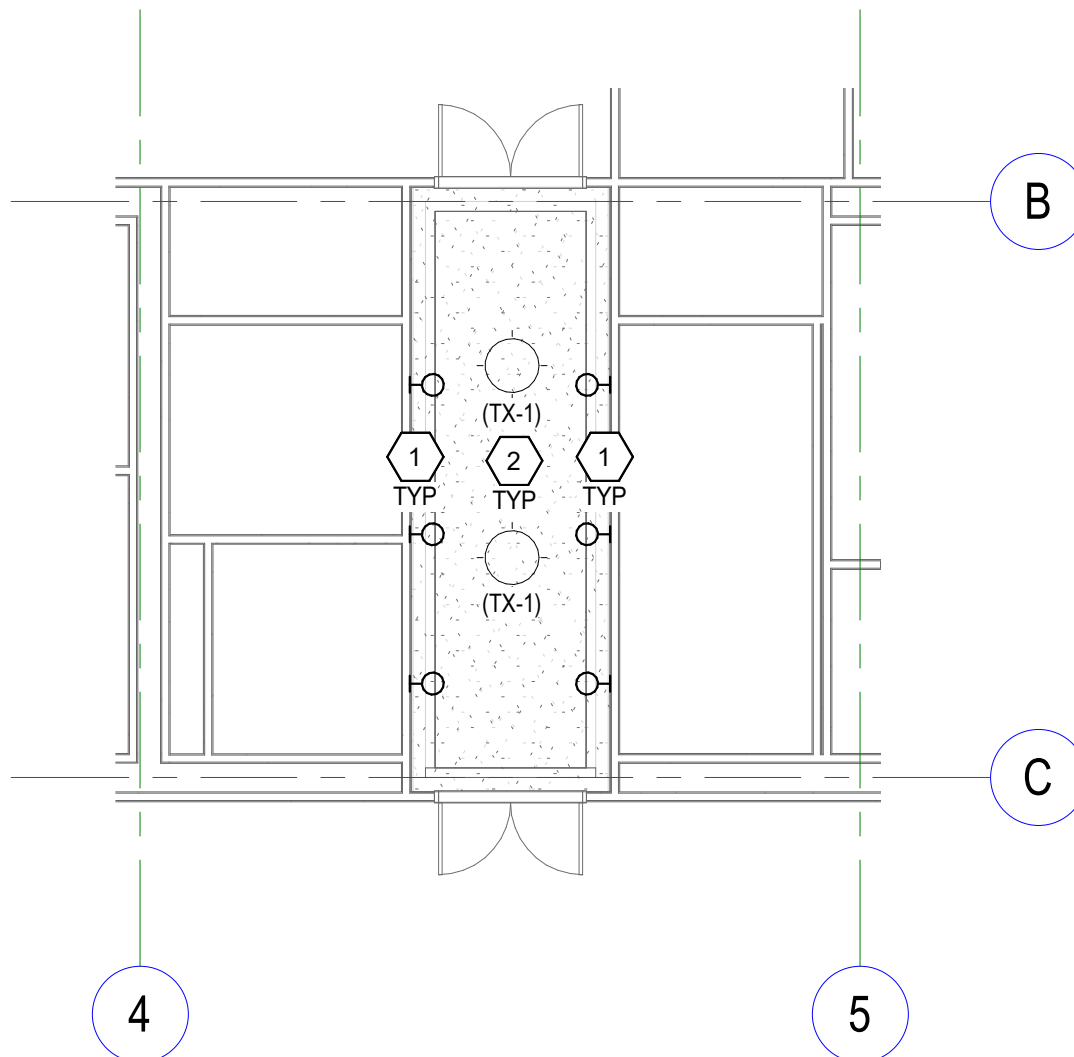


B3 LEVEL 4 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

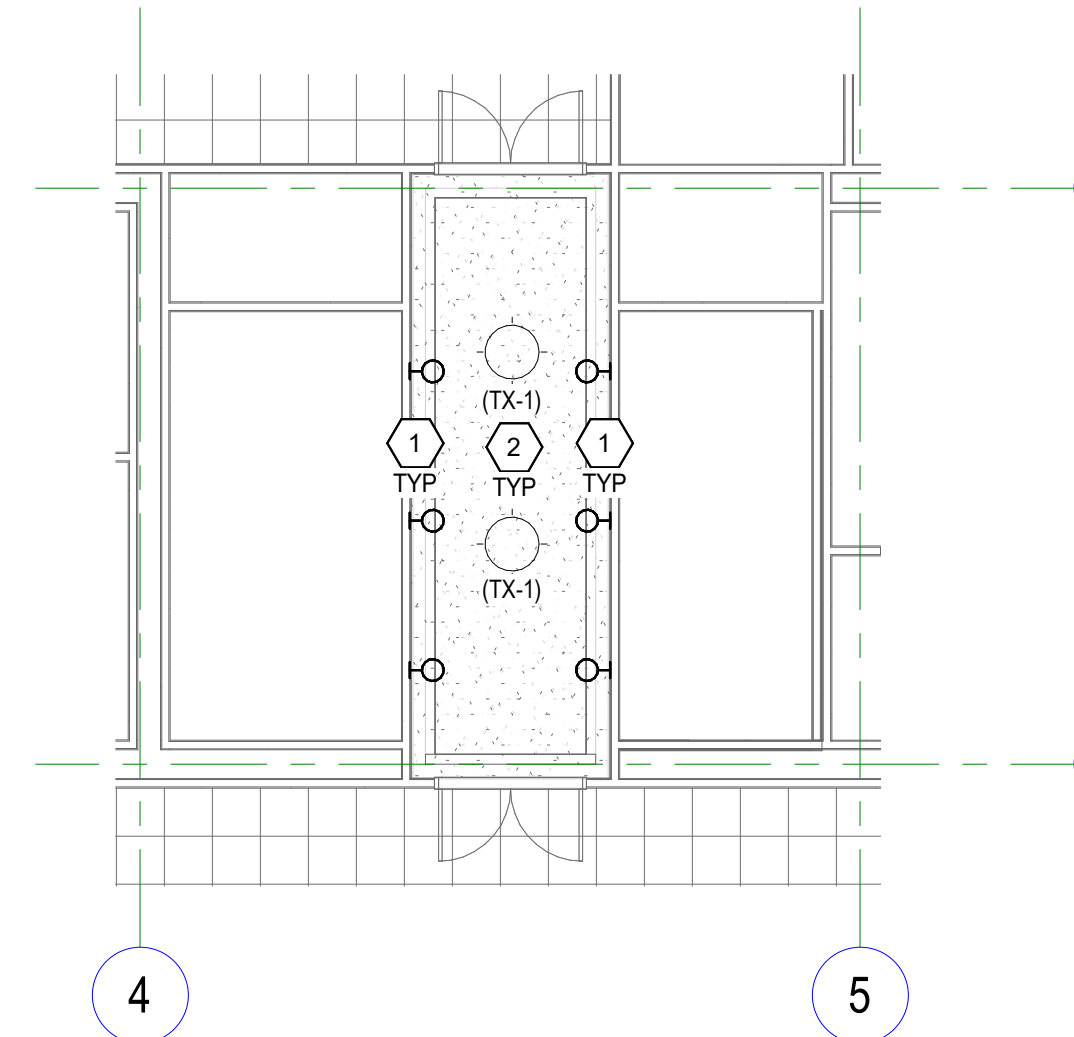


C3 LEVEL 5 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

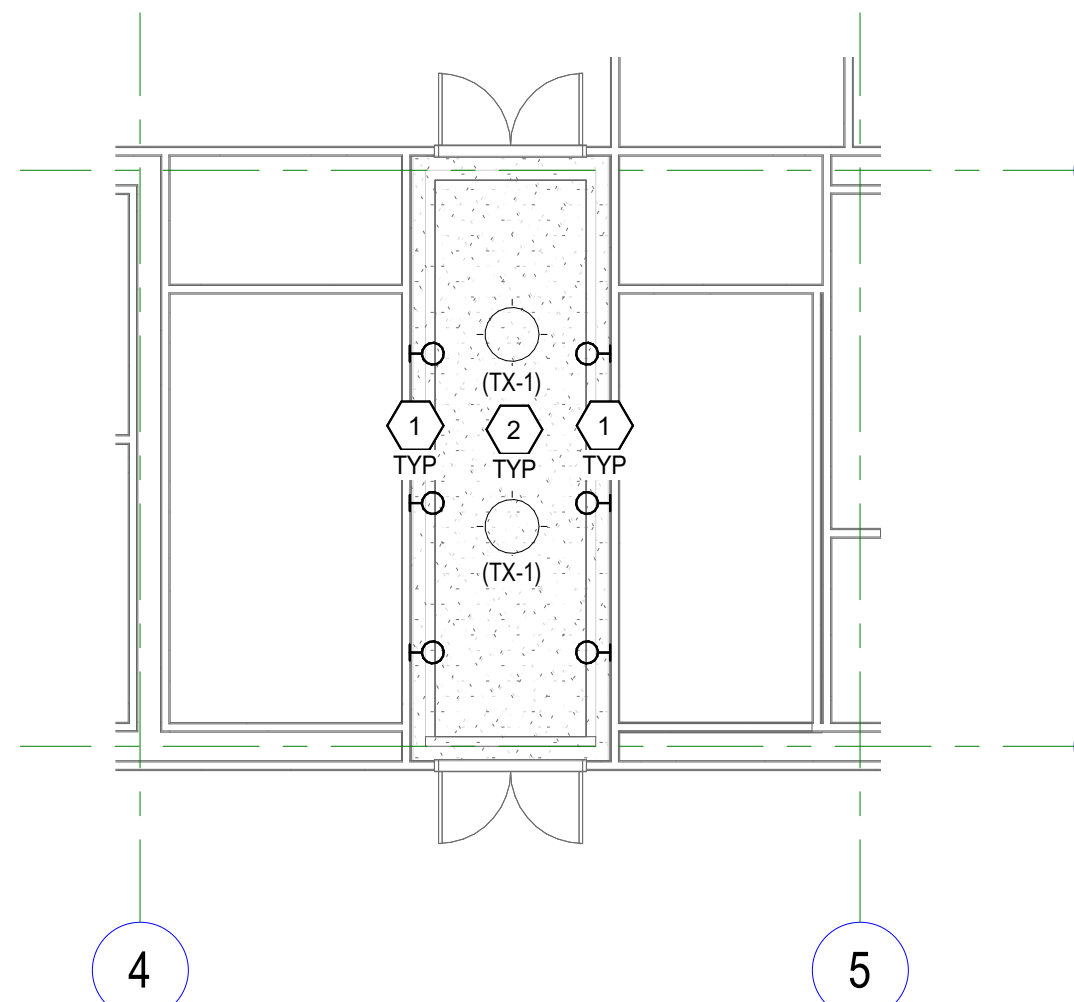


E3 LEVEL 6 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

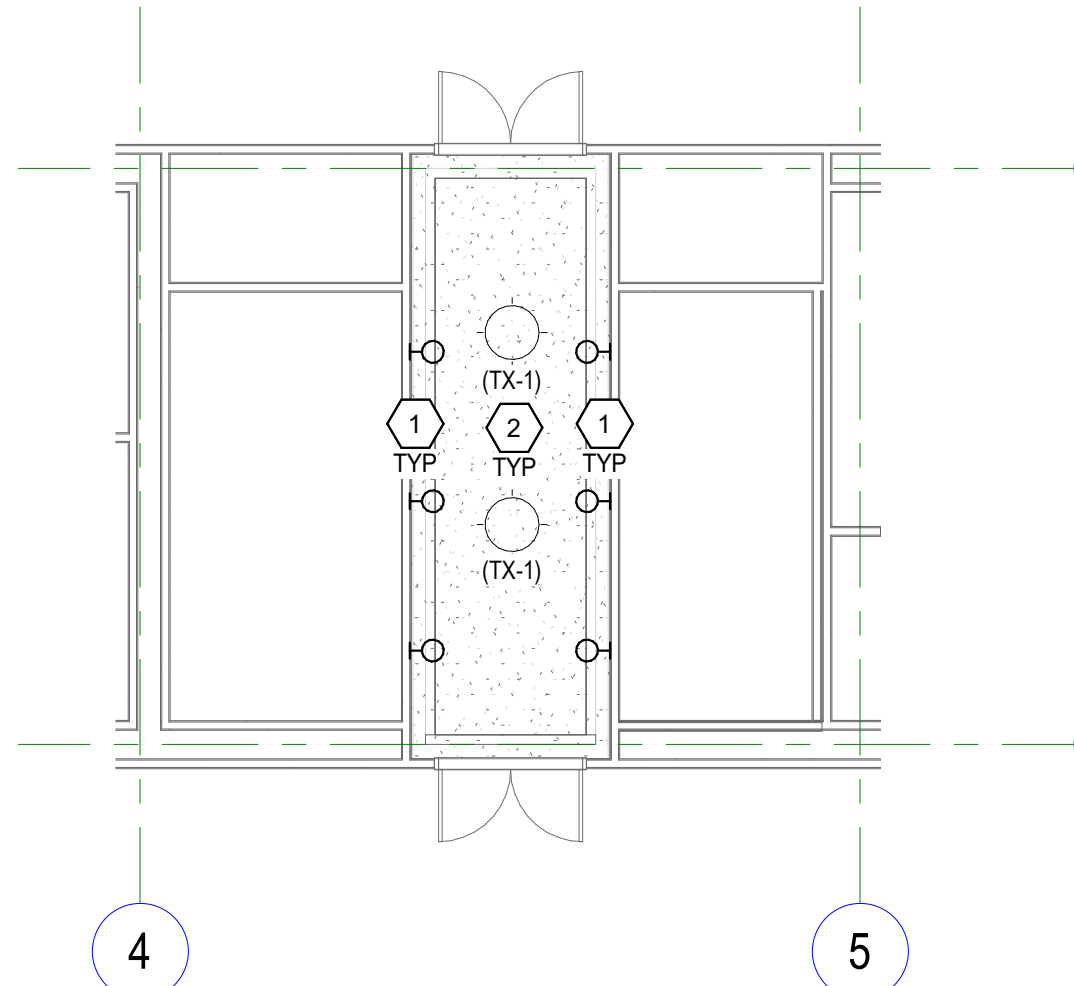

A5 LEVEL 1 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

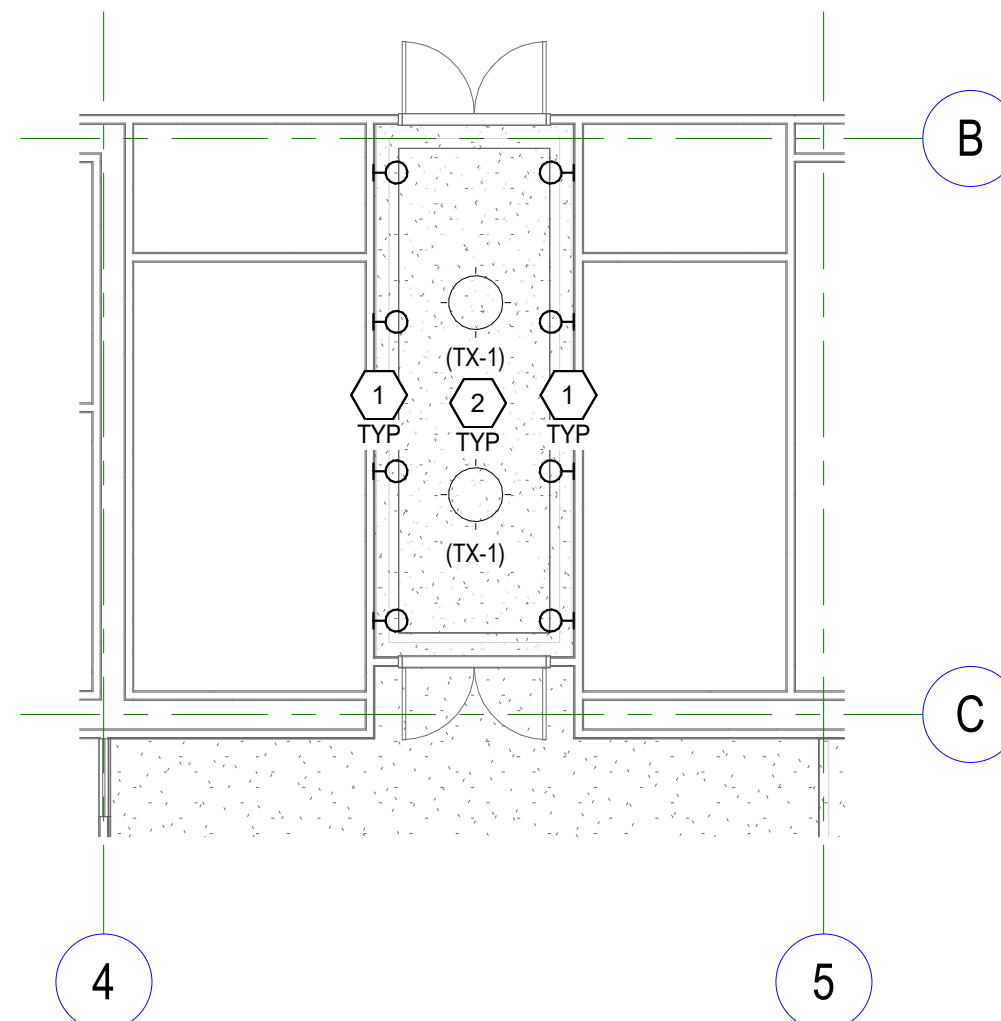

B5 LEVEL 2 LIGHTING PLAN - LOBBY
SCALE: 1/8" = 1'-0"

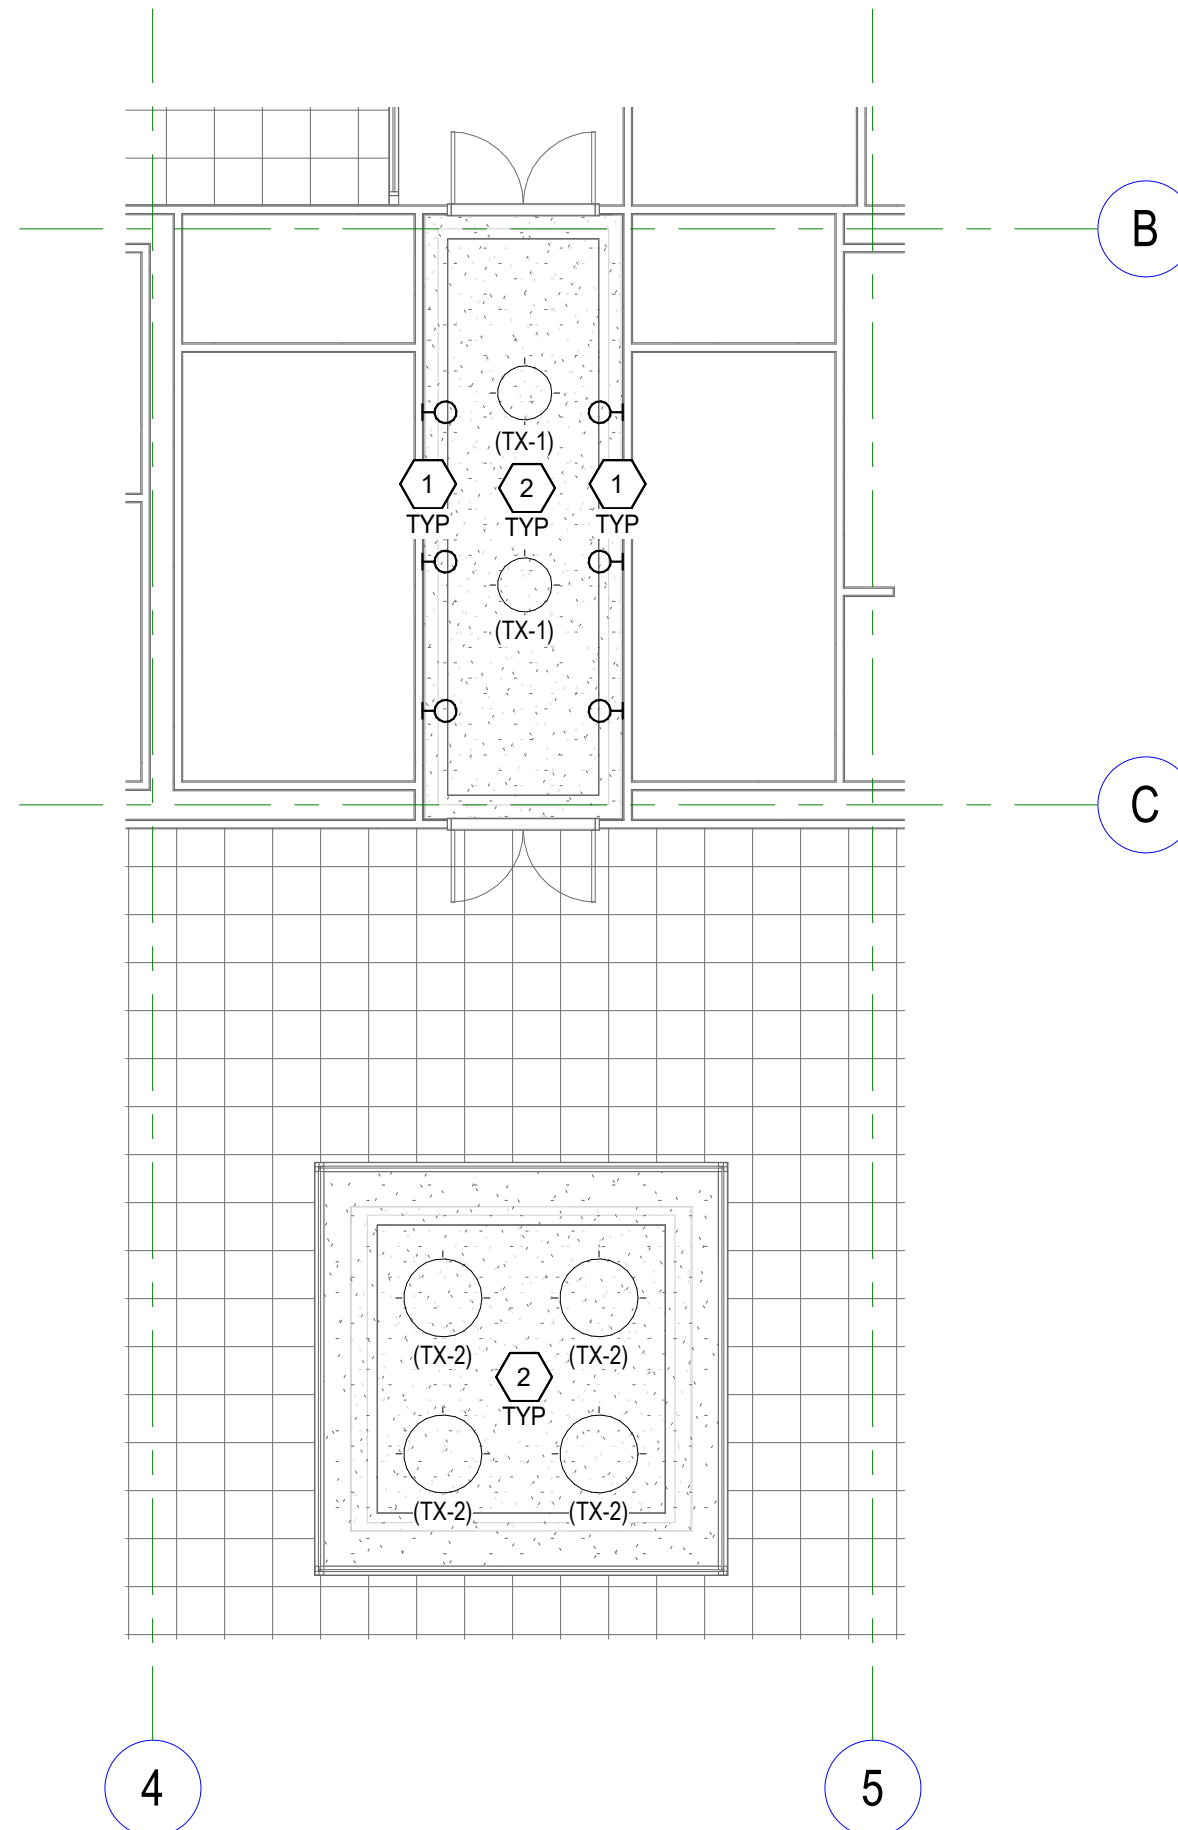

SHEET KEYNOTES

- 1 PROVIDE NEW WALL SCONCE FIXTURE AS SPECIFIED. MOUNT IN SAME LOCATION AS PREVIOUS FIXTURE. MAINTAIN EXISTING CIRCUITING AND CONTROLS.
- 2 PROVIDE NEW DECORATIVE LED PENDANT FIXTURES AS SPECIFIED AND ADD-ALTERNATE PRICING FOR ADD-ALTERNATE FIXTURE INDICATED. MOUNT IN SAME LOCATION AS PREVIOUS FIXTURE. MAINTAIN EXISTING CIRCUITING AND CONTROLS.

GENERAL SHEET NOTES

SELECT HEALTH - LOBBY REMODEL

INTERMOUNTAIN HEALTH CARE
5381 GREEN STREET, MURRAY, UTAH 84123

CONSTRUCTION DOCUMENTS


LIGHTING PLANS

EL 101

VCBO NUMBER: 20235.01
CLIENT NUMBER: 000000
DATE: 01-15-2022

REV DATE DESCRIPTION

SPECTRUM
ENGINEERS
324 S. State St., Suite 400
Salt Lake City, UT 84111
800-678-7077
801-328-5151
fax: 801-328-5155
www.spectrum-engineers.com

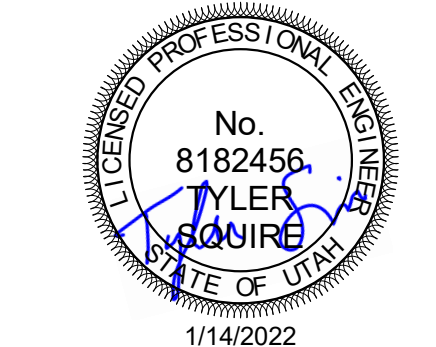

VCBO
ARCHITECTURE
524 SOUTH 600 EAST
SALT LAKE CITY, UT 84102
801-575-8800
VCBO.COM