


TRIUMPH® 4815

Powerful, semi-automatic cutter with electric blade drive, manual spindle clamp, and EASY CUT blade activation.



Shown with optional side tables

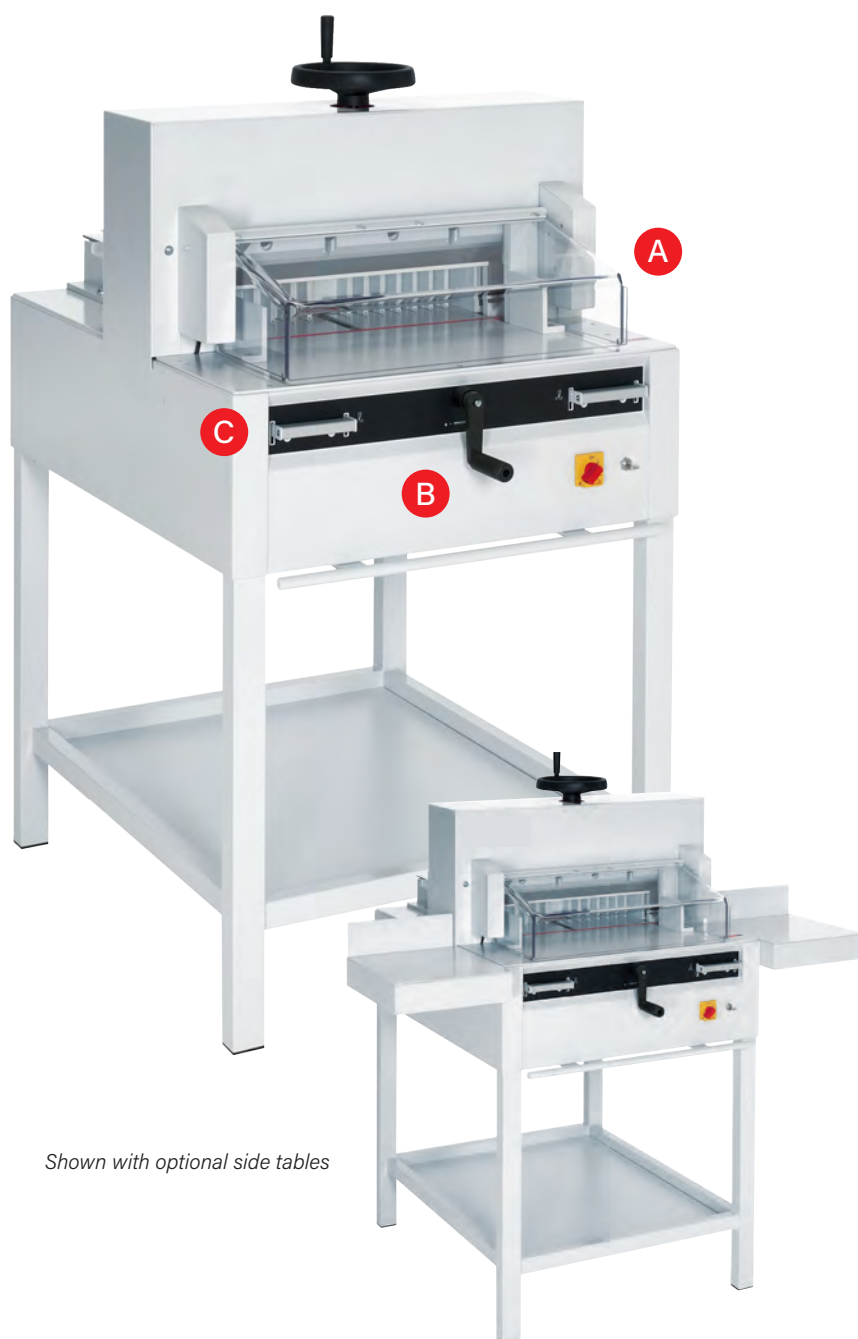

- A TRANSPARENT SAFETY GUARD**
A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.
- B BACK GAUGE HAND CRANK**
The calibrated hand crank is used to set the spindle-guided back gauge.
- C EASY CUT BLADE ACTIVATION BARS**
Patented EASY CUT blade activation bars ensure true, two-hand operation.
- D SAFE BLADE CHANGES**
Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.



AUTOMATED EQUIPMENT SERVICE, INC.

MAIL PROCESSING SYSTEMS

(845) 452-2100 (518) 459-4545
(914) 478-2100 (607) 733-2108
info@AESMailPro.com



TRIUMPH® 4815

- Ergonomic, 37" working height
- Electric blade drive
- Spindle-guided back gauge with calibrated crank
- Front table digital display (cm or inches) for precise back gauge positioning
- Bright, LED optical cutting line
- Safety cover on rear table
- Main switch and safety lock with key
- 24 volt controls (low voltage)
- Patented IDEAL safety drive
- Automatic blade return from every position
- Disc brake for instant blade stop



Digital Display

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.



Tool Holder

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.

Specifications:

Cutting width	18 5/8"
Cutting height	3"
Narrow cut	1"
Dimensions (D x W X H)	41 1/2" x 30" x 55 1/2"
Width with side tables (W)	53"



AUTOMATED EQUIPMENT SERVICE, INC.
MAIL PROCESSING SYSTEMS

