

Dynaric, Inc.

DF40

Semi-Automatic Table-Top Strapping Machine

The Perfect
Solution for
Securing
Packages or
Products



Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or even for product security and more.




Dynaric, Inc.



Semi-Automatic Table-Top Strapping Machine

An economical, easy to use strapping machine designed to run 1/4"– 5/8" strapping. Equipped with externally adjustable strap feed and electronic tension control, the DF40 is the perfect machine for securing and unitizing outgoing shipments of mail trays or bundled mail. Offering added safety for the operator the DF40 is equipped with hinged tabletops to prevent injury due to dropping, as well as large power switch with lock-out feature.

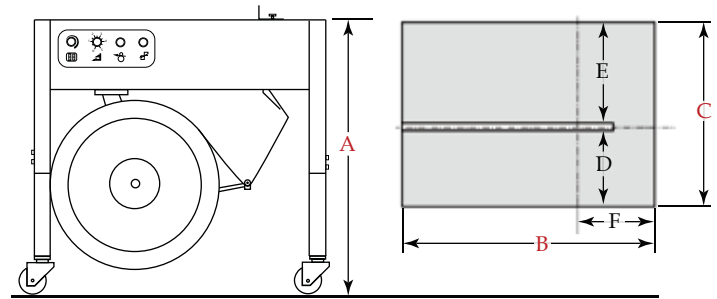

D	10.6" (270 mm)
E	10.4" (265 mm)
F	9.8" (250 mm)

At A Glance

- Utilizes a direct drive dual motor system, eliminating the need for clutches and brakes
- Improved strap feed system eliminates slipping during tensioning even under the harshest conditions
- Suited to handle all office and industrial packaging applications
- New, innovative design with hinged table tops
- Compact, lightweight assembly, for easy mobility throughout your facility
- Compact, low maintenance sealer head
- 5mm - 15mm strapping can be used
- Adjustable bundle stops
- Cycle time capable of 25 - 30 straps per minute
- Strap feed and tension are externally controlled
- Minimal maintenance and lubrication required
- Easily accessible strap dispenser
- Dispenser can be quickly adjusted for 8" or 9" cores
- Complete accessibility for maintenance
- Operates on 120V single-phase power

Overall Width:	^C 21.2" (540 mm)
Overall Length:	^B 33.2" (845 mm)
Overall Height:	^A 29.5"-32.6" (750 mm-830 mm)
Machine Weight:	143 lbs. (65 kg.)
Sealing Method:	Heat Seal
Sealing Head Location:	^F 9.8" (250 mm) from the right of the machine
Power Supply:	120V Single Phase
Cycle Time:	2.0 Seconds*
Cycle Initiation:	Strap Insertion
Tension:	External Electronically Adjustable: 36 - 325 lb.
Min. Package Size:	4" (102 mm)H x 2.4" (61 mm) W
Max. Package Weight:	180 lbs. (81.6 kg)
Mobility:	4 Casters, two are locking
Strapping Size:	1/4" (5 mm) - 5/8" (15.5 mm)
Dispenser:	8" (203 mm) I.D./8" (203 mm) face/18" (457 mm) O.D. 9" (229 mm) I.D./8" (203 mm) face/18" (457 mm) O.D.

* Based on Package Size



AUTOMATED EQUIPMENT SERVICE, INC.

MAIL PROCESSING SYSTEMS

(845) 452-2100 (518) 459-4545
 (914) 478-2100 (607) 733-2108
info@AESMailPro.com