


The LINX DX Tabber

The LINX Deluxe Tabber (DX)



A proven production Tabber. Increase your production time, reduce operator interfacing and provides the best ROI possible. The Linx Deluxe Tabber (DX) is known for it's built-in bump-turn table, shop proven reliability, 24/7 production capabilities.

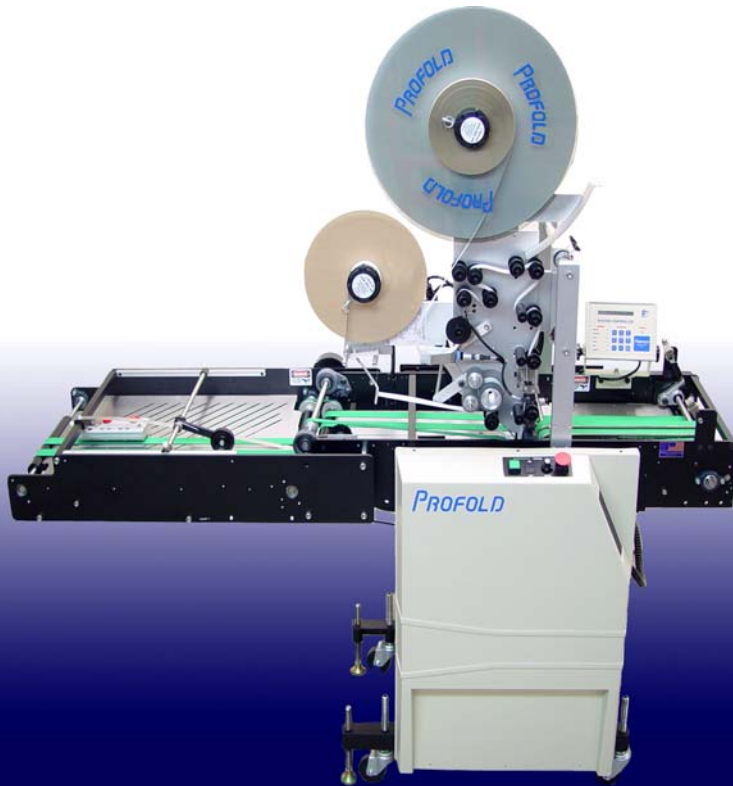

Profold, Inc.

“Profoldability” Own It!

The LINX (DX) Tabber

The Linx Deluxe Tabber

The Linx Deluxe Tabber (DX) is designed to run in-line with folders, knife trimmers and ink jet addressing systems or as a stand-alone unit. The Linx DX can be used wherever the product needs to be turned 90° before processed. It will provide improved production time, reduce operator interfacing and will provide a good ROI on your equipment investment.

Features/Benefits

- Provides cost effective, industry proven tabbing technology.
- Built-in Bump-Turn Registration Table
- Increase production time due to less "down-time" for maintenance
- Places one to eight (1-8) tabs in a single pass
- Can be used to place tabs, stamps, labels, and Post-it notes.
 - Post-it notes require adaptor kit installed
- Has electronic controller which controls accurate tab placement
- Through-put = 30k pieces per hour (Based on 1 piece, with 2 tabs)
- Lower cost due to:
 - ⇒ Lower manual labor requirements
 - ⇒ Designed to work 24/7
 - ⇒ Less down time due to robust design
- Operator-friendly equipment is easy to use.
- Tightest and most accurate tab placement on the market
- Able to place clear tabs tighter due to "TWIST-BELT" function
- Patented "Twist-Belt" sealing function provides tightest tab seal
- Pick-up spool for offloading webbing
- Over 2,000 Linx Tabbers in service
- Warranty: One year on all Profold parts excluding consumables

Linx Tabbers offer the BEST ROI of a production Tabbers on the market today.



P.O. Box 780929
Sebastian, Florida 32978-0929
800-770-3653
772-589-0063
www.profold.com



AUTOMATED EQUIPMENT SERVICE, INC.

MAIL PROCESSING SYSTEMS

(845) 452-2100 (518) 459-4545

(914) 478-2100 (607) 733-2108

info@AESMailPro.com

Specifications

- Product Sizes:
 - Min. 3" x 6"
 - Max. 9" x 12"
- Through-put
 - 30k pieces per hr. (two tabs)
- Pass-line Height:
 - 28" to 40"
 - Table adjustable 2" to 4" up & down
- Product Thickness:
 - Tabbing 5/16"
 - Labeling 5/16"
- Power
 - 115 VAC 10 Amp- Single Phase
- Dimensions
 - 73" High
 - 44" Long
 - 32" Wide
- 19." Spool
 - 40k 1" Tabs
- Optional 2.5" & 4.5" Label Extension Kits

Call Profold's Sales Department to discover our full range of products, designed to be the solution to your mailing graphics needs.