


The LINX PRO+ TABBER

More Features - More Options - Same Price!

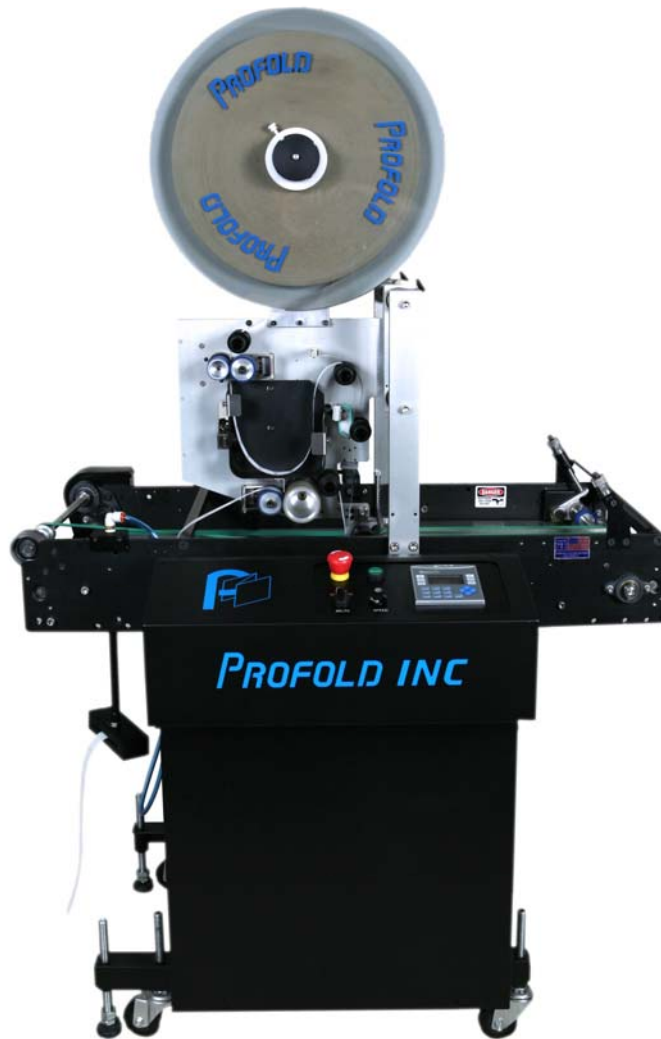

Profold's presents the New LINX PRO+ Tabber.

It will provide you with the proven performance, increased production capabilities, and reduced operator interfacing that you've come to expect from a Profold Tabber and the best ROI possible today.

The LINX PRO+ Tabber combines the proven capabilities of the LINX TABBERS with the benefits and simplification of the RSC TABBER while keeping it at the same basic price as the standard Linx.

**Same Low
Price
More Value
and Benefits!**

- *19" Spool*
- *Simplified threading*
- *Self calibrating tab sensor*
- *Air fed Venturi web waste offload unit*
- *New improved digital control pad*
- *New rugged panels*



Profold, Inc.

The LINX PRO+ TABBER

The **LINX PRO+ TABBER** is Profold's newest addition to its Tabber line-up and has been designed to respond to customer requests we've received for a Tabber that combines the proven abilities of the *Linx Tabber family* with the new benefits provided by the *RSC Tabber* without increasing the price.

Well, here it is, The **New LINX PRO+TABBER!**

The **LINX PRO+ TABBER** provides improved production, reduced operator interfacing, better ROI and gives the customer the ability to "customize" their Tabber the way they want it. They can now add the options they want.

Standard Features/Benefits

- Single 19" Spool
- Simplified web threading (reduces "down time" for spool changes)
- Can easily apply 1.5" tabs (per new USPS specifications)
- Patented "Twist-Belt" sealing assembly
- Tightest and most accurate tab placement on the market
- Able to place one to four (1-4) tabs in a single pass
- New control module provides accurate placement of tabs to 1/8th inch
- Placement of tabs, stamps, labels, and Post-it Notes.
(Post-it Notes require installation of optional 4.5" label kit)
- Air fed Venturi (Waste web removal unit)
- Self Calibrating Tab Sensor
- Improved and easily upgradeable software
- Estimated throughput = 30k pieces per hour (See Specification)
- Operator-friendly equipment is easy to use
- Over 2,500 Profold Tabbers in service today

Available Options:

- Available in Head & Foot configuration
- Height Adjustable Transport Table
- Bump-turn units – Both entry and exit units are height adjustable
- On-board air pumps for Venturi (if shop air not available)
- Rewind Unit (Waste web removal unit)
- 6" color touch screen
- Remote diagnostic capability
- Bi-lingual operator instructions (requires 6" touch screen)
- 4.5" Label Kit
- 220v Electrical Configuration

Warranty: One year, on all Profold parts excluding consumables

Profold Tabbers offer the **BEST ROI** and are production proven!



AUTOMATED EQUIPMENT SERVICE, INC.

MAIL PROCESSING SYSTEMS

(845) 452-2100 (518) 459-4545

(914) 478-2100 (607) 733-2108

info@AESMailPro.com

Specifications

- Product Sizes:
 - Min. 3" x 6"
 - Max. 9" x 12"
- Estimated Throughput:
(product dependant)
 - 30k pph
(two 1" tabs)
 - If bump-turn used, throughput (pph) is effected
(Product dependant)
- Pass-line Height:
 - Standard-34.5"
 - With Height Adj.
 - 26" (Low)
 - 42" (High)
- Product Thickness:
 - Tabbing 5/16"
 - Labeling 5/16"
- New Digital Key Pad
- Power
 - 115 VAC 20 Amp
 - 50/60 Hz
 - Single Phase
- Dimensions
 - 65" High
 - 44" Long
 - 37" Wide
- Standard Spool
 - 19" Spool
- Standard Stripper
 - 2"
- Optional Stripper
 - 4.5" Label Ext. Kit