



# RESTAURANT EQUIPMENT HAWAII



## CABINET CONSTRUCTION

DURABLE TYPE 201 STAINLESS STEEL CONSTRUCTION WITH HINGED LID(S).

COMPACT, COUNTERTOP DESIGN WITH SHALLOW DEPTH REQUIRES MINIMAL SPACE AND LEAVES COUNTER ROOM AT THE FRONT OF THE UNIT.

## REFRIGERATION SYSTEM

1/6 HP COMPRESSOR USES R600A REFRIGERANT. OPERATION REQUIRES AN 115V ELECTRICAL CONNECTION.

COLD WALL DESIGN KEEPS FOOD COLD EVEN WITH REPEATED LID OPENING.

## STORAGE

INCLUDES PAN SUPPORT BARS TO HOLD FOOD PANS (SOLD SEPARATELY).

## MODEL FEATURES

INTUITIVE, EASY TO READ ELECTRONIC CONTROLS.

OPERATES IN AN AMBIENT TEMPERATURE UP TO 90°.

FOAMED-IN-PLACE POLYURETHANE INSULATION. AUTOMATIC DEFROST SYSTEM.

- HOLDS UP TO (4) 1/3 SIZE OR (8) 1/6 SIZE FOOD PANS (SOLD SEPARATELY)
- COMPACT, COUNTERTOP DESIGN GIVES CUSTOMERS EASY ACCESS TO CONDIMENTS
- ECO-FRIENDLY R600A HYDROCARBON REFRIGERANT
- HINGED LID CLOSES OFF FOOD PANS FOR SAFETY FROM CONTAMINANTS WITHOUT NEEDING INDIVIDUAL LIDS WHILE PREVENTING CONTAMINATION
- INTUITIVE DIGITAL TEMPERATURE CONTROLS WITH BACK-LIT LIGHT SWITCH
- MAINTAINS A TEMPERATURE RANGE FROM 33-41° FAHRENHEIT • DURABLE TYPE 201 STAINLESS STEEL HOLDS UP TO WEAR-AND-TEAR
- NON-SCRATCH PLASTIC FEET WILL NOT LEAVE MARKS ON YOUR COUNTERTOP • 115V, 1/6 HP



PARTS & LABOR



COMPRESSOR

WARRANTY  
RESIDENTIAL: REH ASSUMES NO LIABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS INSTALLED IN NON-COMMERCIAL FOODSERVICE OR RESIDENTIAL APPLICATIONS.



# RESTAURANT EQUIPMENT HAWAII

QUALITY COMMERCIAL EQUIPMENT FOR  
RESTAURANTS & BARS

VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON  
EQUIPMENT, FOOD TRUCKS & OUR COMMISARY KITCHEN

808-845-5052

## TECHNICAL DATA

### DIMENSIONS

EXTERIOR DIMENSIONS	47 1/4"W x 15 9/16"D x 11 1/2"H
INTERIOR DIMENSIONS	47 1/4"W x 15 9/16"D x 17 1/8"H
HEIGHT WITH LID OPEN	23 1/4"
CAPACITY	(4) 1/3 & (8) 1/6 SIZE PANS
DOOR TYPE	METAL LID
PACKAGING DIMENSIONS	75"W x 35"D x 28 1/2"H

### COOLING

TEMPERATURE RANGE	33°F-41°F
REFRIGERANT	R600A
MAX. AMBIENT TEMPERATURE	90°F
DEFROSTING	AUTOMATIC
TEMPERATURE CONTROLLER	DIGITAL
HORSEPOWER	1/6


### CONSTRUCTION

EXTERIOR MATERIAL	SS201
INTERIOR MATERIAL	SS201
INSULATION MATERIAL	FOAMED-IN-PLACE POLYURETHANE
NET WEIGHT	49 LB.
GROSS WEIGHT	85 LB.
BTU (BTU/HR)	402

### ELECTRICAL

VOLTAGE	115
AMPS	1.6
HZ	60
PHASE	1
PLUG TYPE	NEMA 5-15P
ELECTRICAL CORD LENGTH	60"

## PLAN VIEW

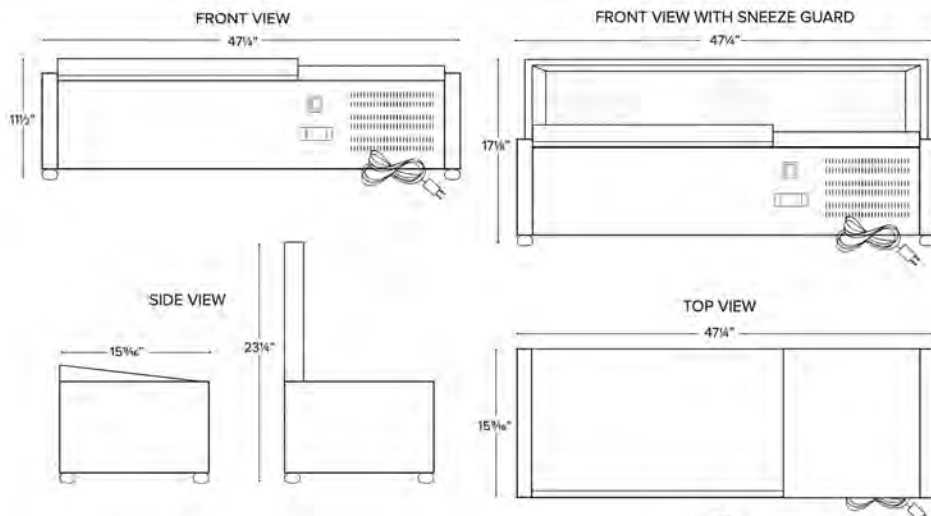

NEMA 5-15P