



# RESTAURANT EQUIPMENT HAWAII



## CABINET CONSTRUCTION

HEAVY DUTY CONSTRUCTION INCLUDES BLACK PLASTIC COATED STEEL EXTERIOR WITH PAINTED ALUMINUM INTERIOR. STAINLESS STEEL LOCKING LIDS AND COUNTERTOP SURFACE.

FOAMED-IN-PLACE CFC- AND HCFC-FREE POLYURETHANE INSULATION ENHANCES THE STRUCTURAL STRENGTH OF THE CABINET AND HELPS INCREASE ENERGY EFFICIENCY. INSULATED LOCKING LID HELPS MAINTAIN SAFE PRODUCT TEMPERATURES.

## REFRIGERATION SYSTEM

ENVIRONMENTALLY-SAFE R290 REFRIGERANT. BOTTOM-MOUNTED CONDENSING UNIT POSITIONED FOR EASY MAINTENANCE.

## SHELVING

3 EPOXY-COATED STEEL DIVIDERS INCLUDED.

## MODEL FEATURES

PREPROGRAMMED DIGITAL CONTROLLER FEATURES AUTO-DEFROST FUNCTION. INCLUDED BOTTLE OPENER WITH REMOVABLE CAP CATCHER MAKES SERVICE CONVENIENT. LOCKING STAINLESS STEEL LIDS PROTECTS CONTENTS DURING OFF HOURS

## SPECIAL FEATURES

- ECO-FRIENDLY R290 HYDROCARBON REFRIGERANT
- DURABLE BLACK COATED STEEL EXTERIOR; PAINTED ALUMINUM INTERIOR
- MAINTAINS TEMPERATURES FROM 33 TO 40°F
- SPACIOUS 12.7 CU. FT. INTERIOR FEATURES 3 EPOXY-COATED DIVIDERS
- INCLUDES 2 LOCKING LIDS AND COMES WITH 1 REMOVABLE BOTTLE OPENER/CAP CATCHER
- FOAMED-IN-PLACE POLYURETHANE INSULATION
- EASY-TO-READ DIGITAL TEMPERATURE CONTROLLER AND AUTO-DEFROST FUNCTION AND AUTO-DEFROST FUNCTION
- 115V, 1/6 HP



PARTS & LABOR



COMPRESSOR

WARRANTY  
RESIDENTIAL: REH ASSUMES NO LIABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS INSTALLED IN NON-COMMERCIAL FOODSERVICE OR RESIDENTIAL APPLICATIONS.



# RESTAURANT EQUIPMENT HAWAII

QUALITY COMMERCIAL EQUIPMENT FOR  
RESTAURANTS & BARS

VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON  
EQUIPMENT, FOOD TRUCKS & OUR COMMISARY KITCHEN

808-845-5052

## TECHNICAL DATA

### DIMENSIONS

EXTERIOR DIMENSIONS	49 1/2" W x 28" D x 34 1/4" H
INTERIOR DIMENSIONS	45 3/8" W x 23" D x 26" H
NET VOLUME	12.7 CU. FT.
NET WEIGHT	181 LB.
GROSS WEIGHT	224 LB.
PACKAGING DIMENSIONS	56" W x 32 3/4" D x 41 3/4" H

### COOLING

TEMPERATURE RANGE	33°F-40°F
REFRIGERANT	R290
MAX. AMBIENT TEMPERATURE	90°F
DEFROSTING	AUTOMATIC
TEMPERATURE CONTROLLER	DIGITAL
HORSEPOWER	1/6



### CONSTRUCTION

EXTERIOR MATERIAL	BLACK COATED STEEL
INTERIOR MATERIAL	PAINTED ALUMINUM
INSULATION MATERIAL	FOAMED-IN-PLACE POLYURETHANE
SHELF SIZE	(3) 23" x 26"
SHELF MATERIAL	EPOXY COATED STEEL

### ELECTRICAL

VOLTAGE	115
AMPS	2.28
Hz	60
PHASE	1
PLUG TYPE	NEMA 5-15P
ELECTRICAL CORD LENGTH	90"

## PLAN VIEW

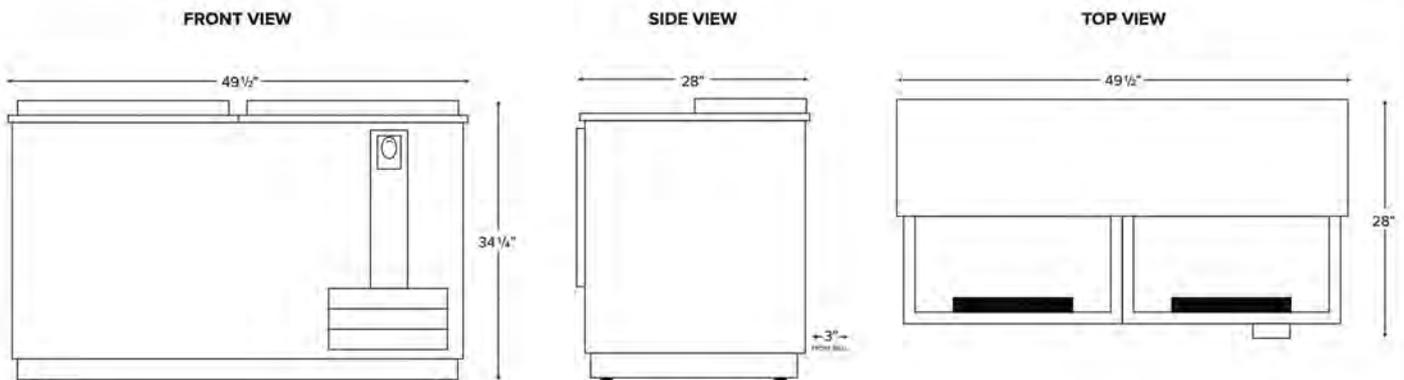

NEMA 5-15P