

Restaurant Equipment Hawaii



CABINET CONSTRUCTION

Heavy duty construction includes black plastic coated steel exterior with painted aluminum interior. Stainless steel locking LIDS and Countertop Surface.

FOAMED-IN-PLACE CFC- AND HCFC-FREE POLYURETHANE INSULATION ENHANCES THE STRUCTURAL STRENGTH OF THE CABINET AND HELPS INCREASE ENERGY EFFICIENCY. INSULATED LOCKING LID HELPS MAINTAIN SAFE PRODUCT TEMPERATURES.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant, Bottom-mounted condensing unit positioned for easy maintenance.

SHELVING

3 epoxy-coated steel dividers included.

MODEL FEATURES

PREPROGRAMMED DIGITAL CONTROLLER FEATURES AUTO-DEFROST FUNCTION. INCLUDED BOTTLE OPENER WITH REMOVABLE CAP CATCHER MAKES SERVICE CONVENIENT. LOCKING STAINLESS STEEL LIDS PROTECTS CONTENTS DURING OFF HOURS.

SPECIAL FEATURES

• ECO-FRIENDLY R290 HYDROCARBON REFRIGERANT

• Durable black coated steel exterior; painted aluminum interior • Maintains temperatures from 33 to 40°F

• Spacious 26.6 cu. ft. interior features 3 EPOXY-COATED DIVIDERS • INCLUDES 3 LOCKING LIDS AND COMES WITH 2 REMOVABLE BOTTLE OPENER / CAP CATCHERS

• FOAMED-IN-PLACE POLYURETHANE INSULATION

• EASY-TO-READ DIGITAL TEMPERATURE CONTROLLER AND AUTO-DEFROST FUNCTION

• 115V; 1/4 HP



WARRANTY RESIDENTIAL: REH ASSUMES NO IABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS IN-STALLED IN NON-COMMERCIAL FOODSERVICE OR RESIDENTIAL APPLICATIONS.



©Restaurant Equipment Hawaii

WWW.RESTAURANTEQUIPMENTHAWAII.COM



Restaurant Equipment Hawaii

QUALITY COMMERCIAL EQUIPMENT FOR RESTAURANTS & BARS VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON EQUIPMENT, FOOD TRUCKS & OURCOMMISARY KITCHEN 808-845-5052

TECHNICAL DATA

DIMENSIONS	
Exterior Dimensions	951/4"W x 28"D x 341/4"H
INTERIOR DIMENSIONS	911/8"W x 23"D x 26"H
NET VOLUME	26.6 cu. ft.
NET WEIGHT	386 lb.
GROSS WEIGHT	429 lb.
PACKAGING DIMENSIONS	1001/2"W x 323/4"D x 413/4"H

CONSTRUCTION

Exterior Material	Black Coated Steel
INTERIOR MATERIAL	PAINTED ALUMINUM
Insulation Material	FOAMED-IN-PLACE POLYURETHANE
SHELF SIZE	(3) 23" x 26"
Shelf Material	EPOXY COATED STEEL

Cooling	
TEMPERATURE RANGE	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	AUTOMATIC
Temperature Controller	DIGITAL
HorsePower	1/4


Electrical

Voltage	115
Amps	4.2
Hz	60
PHASE	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

0 0 0

NEMA 5-15P

PLAN VIEW

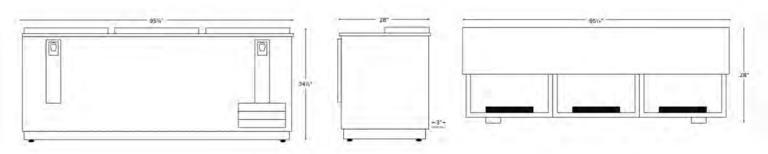

WWW.RESTAURANTEQUIPMENTHAWAII.COM