



RESTAURANT EQUIPMENT HAWAII



CABINET CONSTRUCTION

DURABLE PLASTIC AND TEMPERED GLASS EXTERIOR WITH STAINLESS STEEL INTERIOR.

SLEEK AND MODERN CURVED DESIGN.

POLYSTYRENE INSULATION FOR TEMPERATURE RETENTION.

REFRIGERATION SYSTEM

1/6 HP COMPRESSOR USES R290 REFRIGERANT. OPERATION REQUIRES A 115V ELECTRICAL CONNECTION.

MAINTAINS A TEMPERATURE RANGE FROM 33-40°F. INCLUDES AUTOMATIC DEFROST SETTING.

STORAGE

CAN HOLD (5) 1/2 SIZE, 11/2" DEPTH HOTEL PANS (INCLUDED WITH UNIT).

MODEL FEATURES

INTUITIVE, EASY TO READ PRE-PROGRAMMED ELECTRONIC CONTROLS. OPERATES IN AN AMBIENT TEMPERATURE UP TO 90°F.

INTERNAL LED LIGHTING ILLUMINATES SUSHI.

SPECIAL FEATURES

- COMPACT, COUNTERTOP DESIGN GIVES CUSTOMERS EYE-LEVEL SITE OF FRESH INGREDIENTS.
- ECO-FRIENDLY R290 HYDROCARBON REFRIGERANT.
- BRIGHT, ENERGY EFFICIENT LED LIGHTING ILLUMINATES THE CONTENTS OF THE CASE.
- RIGHT SIDE COMPRESSOR ALLOWS UNIT TO BE PLACED FLUSH AGAINST WALL OR EQUIPMENT.
- REAR SLIDING DOOR GIVES EASY ACCESS FOR BOTH SERVING AND LOADING OF THE FOOD.
- NON-SCRATCH FEET WILL NOT LEAVE MARKS ON YOUR COUNTERTOP.
- REAR LOCATED DRAIN FOR EASY DRAINING OF CONDENSER DEFROST WATER.
- 115V, 1/6 HP.



PARTS & LABOR



COMPRESSOR

WARRANTY
RESIDENTIAL: REH ASSUMES NO LIABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS INSTALLED IN NON-COMMERCIAL FOODSERVICE OR RESIDENTIAL APPLICATIONS.



RESTAURANT EQUIPMENT HAWAII

QUALITY COMMERCIAL EQUIPMENT FOR
RESTAURANTS & BARS

VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON
EQUIPMENT, FOOD TRUCKS & OUR COMMISARY KITCHEN

808-845-5052

TECHNICAL DATA

DIMENSIONS

EXTERIOR DIMENSIONS	70 ⁷ / ₈ "W x 16 ¹ / ₂ "D x 10 ¹ / ₂ "H
INTERIOR DIMENSIONS	53 ¹ / ₈ "W x 15 ¹ / ₄ "D x 8 ³ / ₄ "H
NET VOLUME (CU. FT.)	3 ¹ / ₂ CU. FT.
NET WEIGHT	99 LB.
GROSS WEIGHT	108 LB.
PACKAGING DIMENSIONS	74 ¹ / ₂ "W x 20"D x 14 ¹ / ₄ "H

COOLING

TEMPERATURE RANGE	33°F-40°F
REFRIGERANT	R290
MAX. AMBIENT TEMPERATURE	90°F
DEFROSTING	AUTOMATIC
TEMPERATURE CONTROLLER	DIGITAL
HORSEPOWER	1/6


CONSTRUCTION

EXTERIOR MATERIAL	PLASTIC AND TEMPERED GLASS
INTERIOR MATERIAL	STAINLESS STEEL AND PLASTIC
DOOR TYPE	SLIDING
INSULATION MATERIAL	POLYSTYRENE
BTU (BTU/HR)	648

ELECTRICAL

VOLTAGE	115
AMPS	1.3
Hz	60
PHASE	1
PLUG TYPE	NEMA 5-15P
ELECTRICAL CORD LENGTH	94"

PLAN VIEW

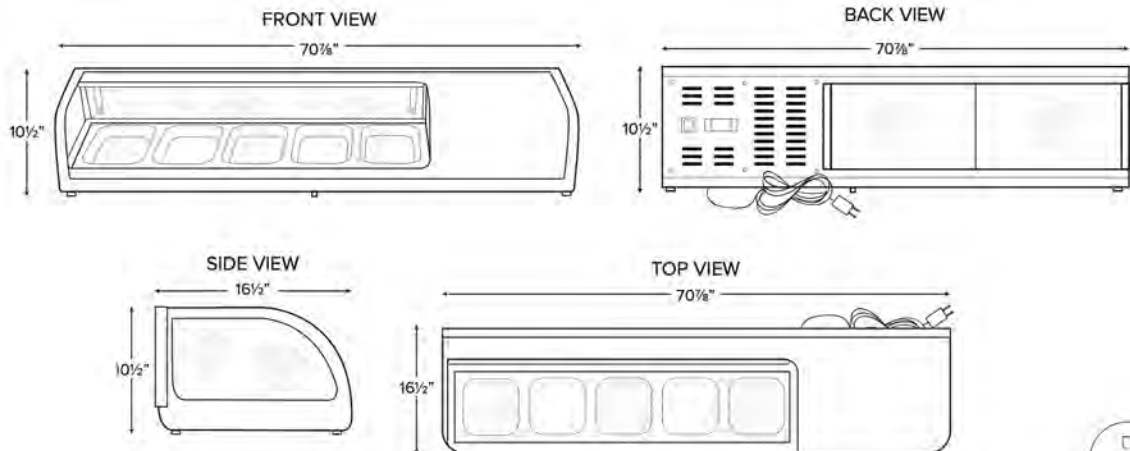

NEMA 5-15P