



# RESTAURANT EQUIPMENT HAWAII



## CABINET CONSTRUCTION

HEAVY DUTY CONSTRUCTION INCLUDES A 304 TYPE STAINLESS STEEL INTERIOR AND A 430 TYPE STAINLESS STEEL EXTERIOR, RESULTING IN STRENGTH, DURABILITY, AND AN ATTRACTIVE, SLEEK APPEARANCE.

FOAMED-IN-PLACE CFC- AND HCFC-FREE POLYURETHANE INSULATION ENHANCES THE STRUCTURAL STRENGTH OF THE CABINET AND HELPS INCREASE ENERGY EFFICIENCY.

ONE-PIECE REAR GRILL IS EASILY REMOVED FOR CLEANING AND SERVICING.

3 DOORS FEATURE EASY-TO-USE RECESSED HANDLES FOR QUICK INTERIOR ACCESS. DOORS STAY OPEN PAST 90° FOR EASY LOADING, BUT WILL SELF-CLOSE UNDER 90° TO SAVE ENERGY.

## REFRIGERATION SYSTEM

ENVIRONMENTALLY SAFE R290 REFRIGERANT. REAR-MOUNTED CONDENSING UNIT POSITIONED FOR EASY MAINTENANCE.

## SHELVING

3 WHITE EPOXY-COATED STEEL SHELVES INCLUDED. EACH ACCOMMODATE UP TO 90 LB.

## MODEL FEATURES

COPPER EVAPORATOR COIL ELIMINATES THE POTENTIAL OF CORROSION.

INTERIOR WALL-MOUNTED THERMOMETER FOR EASY TEMPERATURE MONITORING.

PREPROGRAMMED DIGITAL CONTROLLER FEATURES AUTO-DEFROST FUNCTION.

## SPECIAL FEATURES

- ECO-FRIENDLY R290 HYDROCARBON REFRIGERANT
- STRONG AND SLEEK 430 TYPE STAINLESS STEEL EXTERIOR
- 304 TYPE STAINLESS STEEL INTERIOR MAINTAINS TEMPERATURES FROM 33°F - 40°F
- THREE EPOXY-COATED STEEL SHELVES ACCOMMODATE UP TO 90 LB. EACH
- FOAMED-IN-PLACE POLYURETHANE INSULATION
- 115V; 1/5 HP
- EASY-TO-READ DIGITAL TEMPERATURE CONTROLLER AND AUTO-DEFROST FUNCTION



PARTS & LABOR



COMPRESSOR

WARRANTY  
RESIDENTIAL: REH ASSUMES NO LIABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS INSTALLED IN NON-COMMERCIAL, FOODSERVICE OR RESIDENTIAL APPLICATIONS.



# RESTAURANT EQUIPMENT HAWAII

QUALITY COMMERCIAL EQUIPMENT FOR RESTAURANTS & BARS

VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON EQUIPMENT, FOOD TRUCKS & OUR COMMISARY KITCHEN

808-845-5052

## TECHNICAL DATA

### Dimensions

Exterior Dimensions	71½"W x 29½"D x 35¼"H
Interior Dimensions	66⅞"W x 22⅞"D x 23½"H
Working Height	35¼"
Net Volume	16.9 cu. ft.
Net Weight	298 lb.
Gross Weight	370 lb.
Packaging Dimensions	74¼"W x 32¼"D x 38½"H

### Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

### Construction


Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 20 <sup>13</sup> / <sub>16</sub> " x 17 <sup>1</sup> / <sub>16</sub> " + (1) 17 <sup>1</sup> / <sub>16</sub> " x 23 <sup>1</sup> / <sub>2</sub> "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

### Electrical


Voltage	115
Amps	3.2
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

## PLAN VIEW

FRONT VIEW

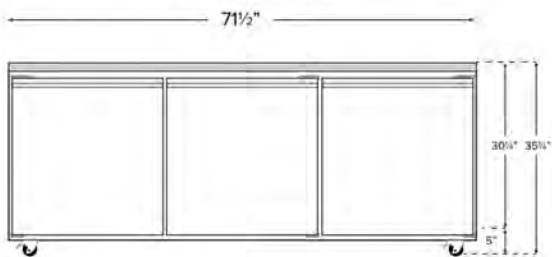

SIDE VIEW



TOP VIEW

