


Pneumatic Rotary Actuators

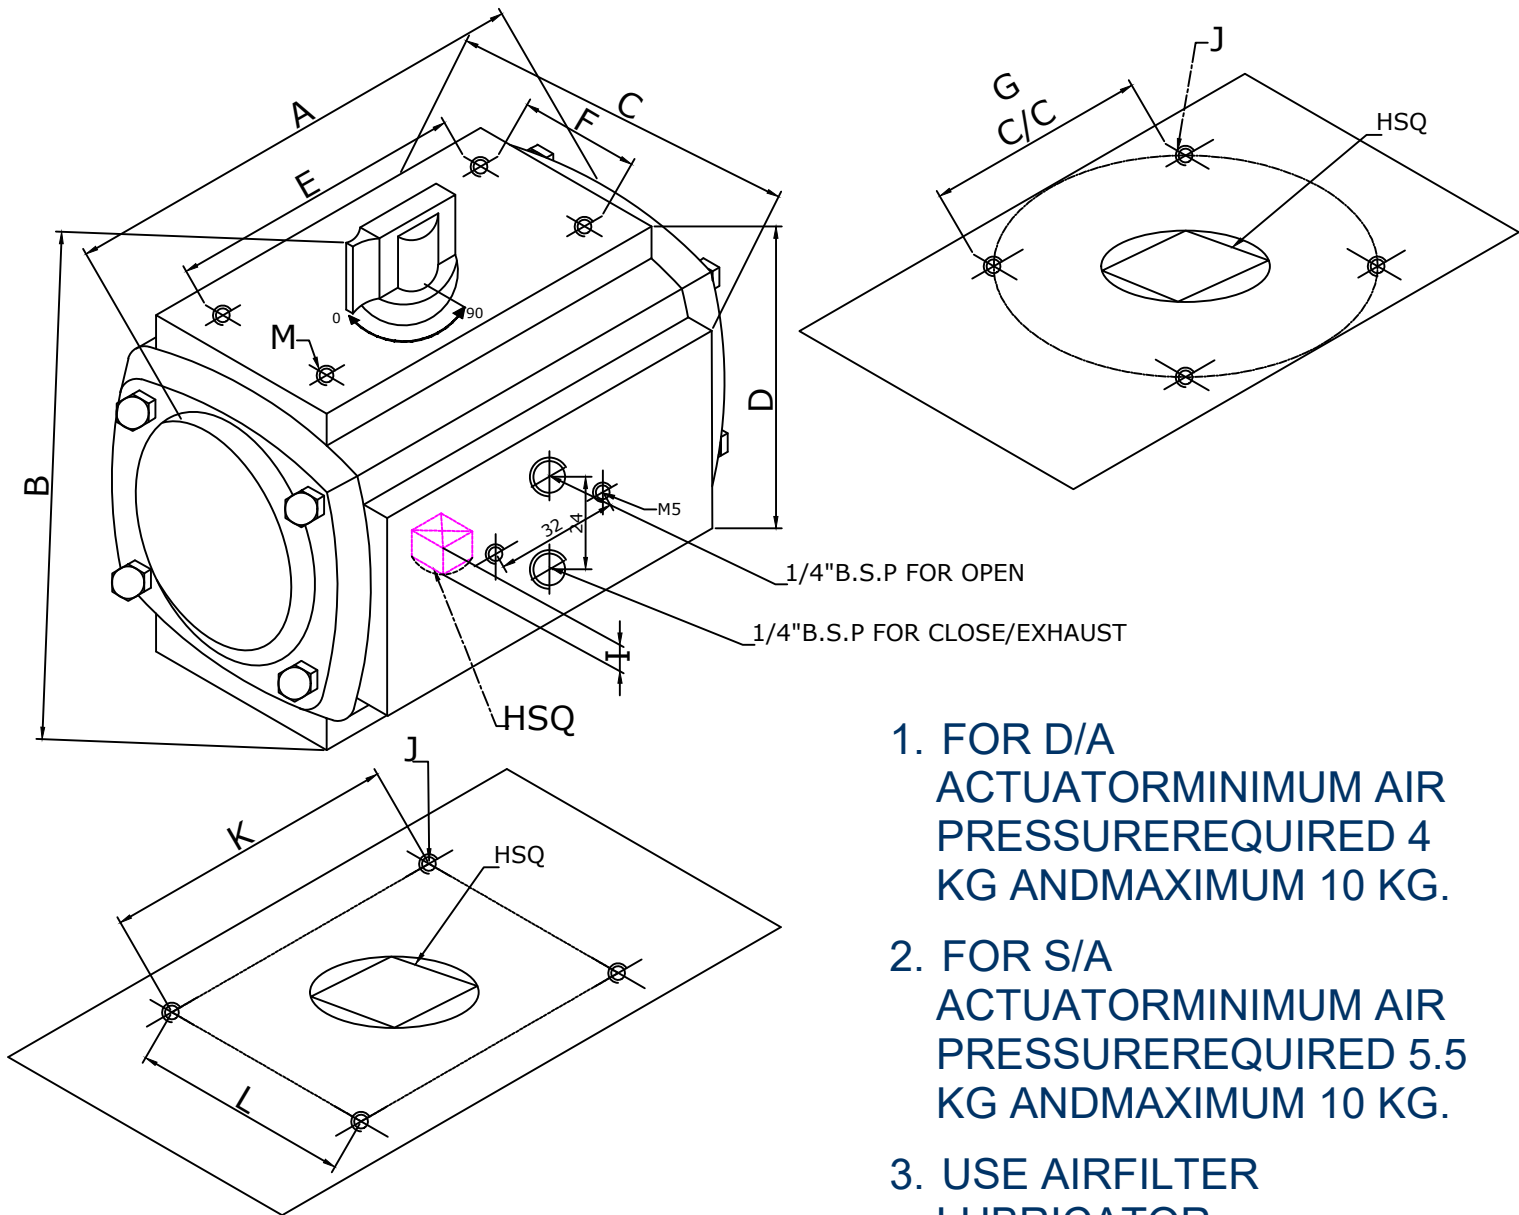

1. FOR D/A
ACTUATOR MINIMUM AIR
PRESSURE REQUIRED 4
KG AND MAXIMUM 10 KG.
2. FOR S/A
ACTUATOR MINIMUM AIR
PRESSURE REQUIRED 5.5
KG AND MAXIMUM 10 KG.
3. USE AIR FILTER
LUBRICATOR

ACTUATOR SIZE

SR. NO.	MODEL NO.	A D/A	A S/A	B	C	D	E	F	PCD	HSQ	I	J	G C/C	K	L	M
1	50045	117	139	94	59	66	80	30	42	8	8	M-5	29.5	-	-	M-5
2	50056	159	159	108	73	80	80	30	50	8/12	8/12	M-6	35	-	-	M-5
3	50069	188	188	115	80	87	80	30	50	12	12	M-6	35	50	35	M-5
4	50080	178	212	145	98	108	80	30	70	12/16	12/16	M-8	49.5	-	-	M-5
5	50101	210	268	170	118	128	80	30	70	16/19/ STAR-17	16/19/ DEEP-19	M-8	49.5	-	-	M-5
6	50125	280	353	205	146	153	80	30	102	24	24	M-10	72	-	-	M-5
7	50160	360	448	220	182	192	80	30	127	24/27	24/27	M-10	89.8			M-5
8	50200	392	558	268	228	240	80/130	30	125/164	27	27	M-12/18	88/116	-	-	M-5