
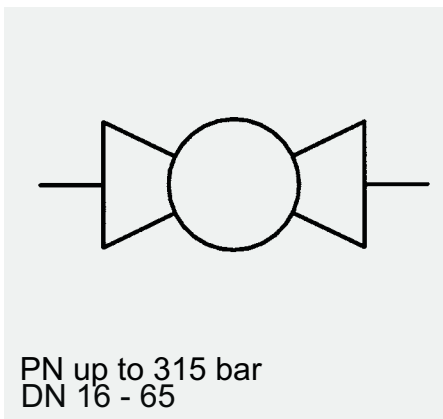


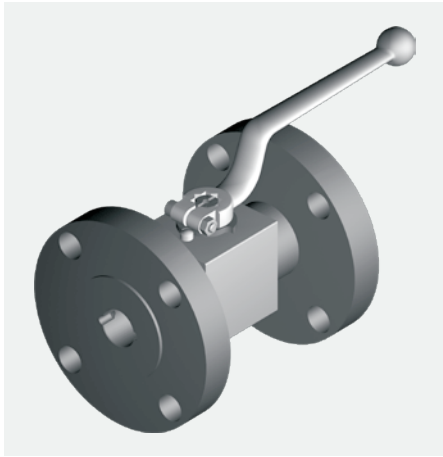

Flanged Ball Valves KHBF / KHBFF

Model code

(also order example)

KHBF 16 PN040 11141 02 x ...

designation

KHBF =	Block-type ball valve	DN 16 - 25 (steel)
		DN 32 - 50 (steel)
		DN 16 - 50 (stainless steel)
	Long version –	DIN 3202 - F1
	DIN-EN 558-1, FTF, basic range 1	
KHBFF =	Sleeve-type ball valve	DN 32 - 50 (steel / stainless steel)
	Short version –	DIN 3202 - F4
	DIN-EN 558-1, FTF, basic range 14	

Nominal bore

(DN)

Pressure range

(to DIN 2401)

Materials

Housing, connection adapters and control spindle

1	=	Steel
3	=	Stainless steel (1.4571)

Ball

1	=	Steel
3	=	Stainless steel (1.4571)

Ball seal

1	=	POM (polyacetal)
---	---	------------------

Soft seal

4	=	FKM (Viton)
---	---	-------------

Flanges

1	=	Steel
3	=	Stainless steel (1.4571)

(other material combinations on request)

Handle

02	=	aluminium clamped handle, cranked, supplied loose	DN 16 - 25
06	=	steel bolt-on handle, cranked, supplied loose	DN 32 - 50

series


(determined by manufacturer)

surface protection

...	=	phosphate-plated (no details required)
A	=	zinc-plated, chrome (VI)-free

Dimensions

KHBF

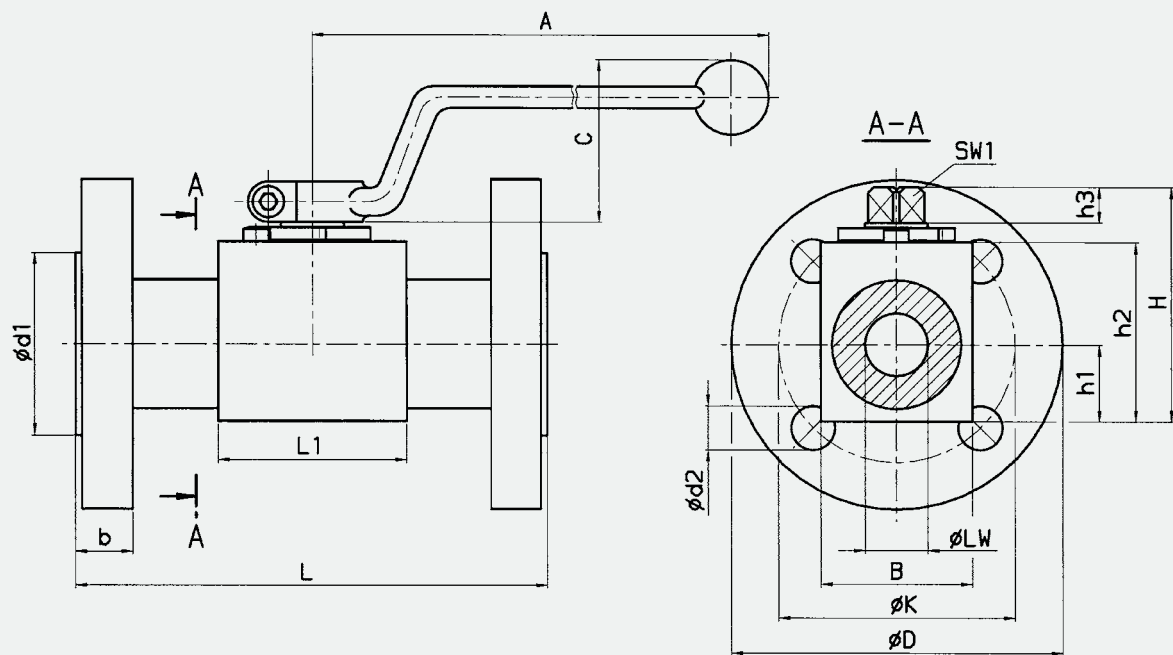

	Housing dimensions											PN (Ball valve)
Version	DN	LW	L1	B	H	h1	h2	h3	SW1	A	C	[bar]
Block housing KHBF DN16-25 (steel)	16	15	47	38	62	19	45	11	12	185	47	400
	20	20	60	48	75	24.5	57	11	14	203	54	315
	25	25	65	57	81.5	28.5	64	11	14	203	54	315
Sleeve housing KHBF / KHBFF DN16-50 (stainless steel) DN32-50 (steel)	16	15	46	45	66.5	22.5	48.5	11	12	185	47	400
	20	20	58	55	78	27.5	60	11	14	203	54	315
	25	25	64	60	83.5	30	65.5	11	14	203	54	315
	32	30	84	75	103	38	85	12	17	228	80	315
	40	38	91	85	114	43	96	12	17	228	80	315
	50	48	100	105	131.5	53	113	12	17	228	80	315
	65	63	115	115	-	-	135	12	17	-	-	315

Type of connection / Seal face	Type	Pressure range PN [bar]	L	D	d1	d2	K	b	Z*	Weight [kg]
F1 (FTF, basic range 1)	KHBF - 16	40	130	95	45	14	65	16	4	2.2
		160	130	105	45	14	75	20	4	3.0
		315	130	130	45	18	90	26	4	4.1
	KHBF - 20	40	150	105	58	14	75	18	4	3.4
	KHBF - 25	40	160	115	68	14	85	18	4	5.0
		160	160	140	68	18	100	24	4	7.1
		250	160	150	68	22	105	28	4	8.6
		315	160	160	68	22	115	34	4	9.2
	KHBF - 32	40	180	140	78	18	100	18	4	7.3
		160	180	155	78	22	110	26	4	10.0
	KHBF - 40	40	200	150	88	18	110	18	4	9.5
		160	200	170	88	22	125	28	4	13.0
		250	200	185	88	26	135	34	4	15.5
		315	200	195	88	26	145	38	4	17.5
	KHBF - 50	40	230	165	102	18	125	20	4	13.1
		63	230	180	102	22	135	26	4	18.0
		160	230	195	102	26	145	30	4	23.5
		250	230	200	102	26	150	38	8	28.5
		315	230	210	102	26	160	42	8	31.0
F4 (FTF basic range 14)	KHBFF - 032	40	130	140	78	18	100	18	4	6.1
	KHBFF - 040	40	140	150	88	18	110	18	4	7.7
	KHBFF - 050	40	150	165	102	18	125	20	4	10.7
	KHBFF - 065	315	241	-	121	18	-	13		

z* = number of fixing holes

Technical specifications

Length:	DIN-EN 558-1 - FTF, basic range 1 (DIN 3202 – F1, long version) DIN-EN 558-1 - FTF, basic range 14 (DIN 3202 – F4, short version)
Flange dimensions:	DIN 2501, Form E
Flange connections:	rotating flanges
Mounting position:	optional
Ambient temperature:	-10 °C to +80 °C
Nominal pressure:	up to PN 315 bar (see pressure range)
Operating fluids:	mineral oil to DIN 51524 Part 1 and Part 2 (other fluids on request)
Temperature of operating fluid:	-10 °C to +80 °C

NOTE

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

FLUTEC VALVES

12-Sardar Bachan Singh Estate,
Sonawala Main Road, Opp. Cello Building,
Goregaon east, Mumbai-400 063.
Cell.: +91 98210 43687, +91 97694 43687
Telfax : +91 22 2686 1591
Email : flutec1@hotmail.com,
sales@flutecvalves.com