

This product is represented in Australia, New Zealand, and PNG by:

InKorr Pty Ltd

Address: Unit 12, 103 Lewis Road,
Knoxfield VIC 3180, Australia

Email: inkorr.service@inkorr.com.au

General: +61 (3) 8201 4868

Service: +61 (0) 478 800 003

Contact us with any enquiries related to:




Heat Transfer Equipment

- Shell & Tube Heat Exchangers - Standard, Custom, Corrugated Tubes.
- Plate Heat Exchangers - Brazed, Gasketed, Semi-Welded, & Welded.
- Graphite Heat Exchangers.
- Plate & Shell Heat Exchangers.
- Spiral Heat Exchangers.
- Crossflow Welded Heat Exchangers.
- Direct Steam Injection Heaters.
- Air Coolers.



Corrosion Resistant Equipment - Valves, Piping, Vessels & Systems

- Polymer-Lined Valves, Piping, and Pressure Vessels.
- Exotic Metal (Ta, Zr, Ti) Fabricated Piping and Pressure Vessels.
- Glass-Lined Vessels.
- Graphite Equipment and System Packages.

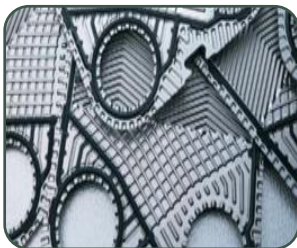


Service Maintenance

- Plate Heat Exchangers - Refurbishment, Gas Testing, UV Crack Testing.
- Graphite Equipment - Installation, Refurbishment, Repairs.
- Glass-Lined Vessels - Spark Testing, Lining Repair.
- Quality Spare Parts, both OEM and Aftermarket.



Process Heating Solutions Worldwide

Chemical & Pharmaceutical Processing Industry Case History

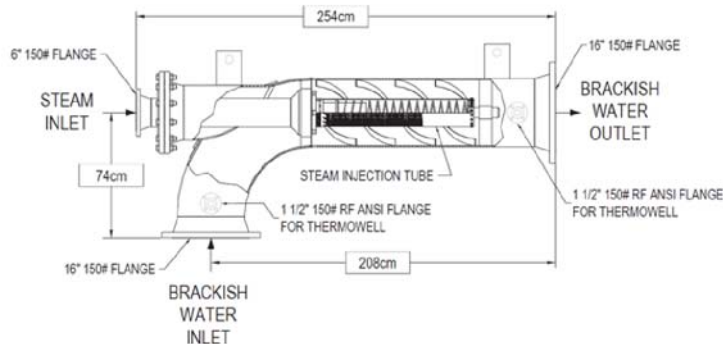

Brackish Water Heater

Application

An oil company needed a brackish water heater for their site in Alberta, Canada. It was to satisfy both start up and design process loads, using 3.5 kg/cm² saturated steam. Water pressure is 1 kg/cm².

Start Up: 316,000 kg/hr @ 43°C DT

Design: 958,600 kg/hr @ 13.5°C DT

The heater was to be of carbon steel construction and designed for installation in 16" diameter brackish water piping system.

Solution

Pick Model 6X500-1 FAB Steam Heater. Rated steam capacity = 22,700 kg/hr. Heater is mounted horizontally in piping system with brackish water entering at long radius elbow. It flows through mixing chamber with minimal obstruction. This provides low pressure drop-within 30 kPa specified limit at 958,600 kg/hr design flow.

Within the Pick Heater, steam is injected into brackish water through thousands of small orifices in an injection tube assembly. By breaking the steam flow into small "bubbles," the steam condenses instantly and quietly.

Learn more at www.pickheaters.com

Pick Heaters, Inc. — 730 S. Indiana Ave. — West Bend, WI 53095 USA
Phone: (262) 338-1191 — Email: info1@pickheaters.com

Features and Benefits:

- Fabricated Housing, Designed to Fit in 16" Diameter Piping System
- Elbow Design, Allows Removal of Injector Without Disturbing Water Piping Connections
- Low Pressure Drop
- Compact Size