

This product is represented in Australia, New Zealand, and PNG by:

InKorr Pty Ltd

Address: Unit 12, 103 Lewis Road,
Knoxfield VIC 3180, Australia

Email: inkorr.service@inkorr.com.au

General: +61 (3) 8201 4868

Service: +61 (0) 478 800 003

Contact us with any enquiries related to:




Heat Transfer Equipment

- Shell & Tube Heat Exchangers - Standard, Custom, Corrugated Tubes.
- Plate Heat Exchangers - Brazed, Gasketed, Semi-Welded, & Welded.
- Graphite Heat Exchangers.
- Plate & Shell Heat Exchangers.
- Spiral Heat Exchangers.
- Crossflow Welded Heat Exchangers.
- Direct Steam Injection Heaters.
- Air Coolers.



Corrosion Resistant Equipment - Valves, Piping, Vessels & Systems

- Polymer-Lined Valves, Piping, and Pressure Vessels.
- Exotic Metal (Ta, Zr, Ti) Fabricated Piping and Pressure Vessels.
- Glass-Lined Vessels.
- Graphite Equipment and System Packages.

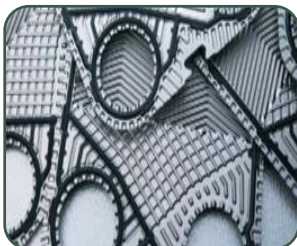


Service Maintenance

- Plate Heat Exchangers - Refurbishment, Gas Testing, UV Crack Testing.
- Graphite Equipment - Installation, Refurbishment, Repairs.
- Glass-Lined Vessels - Spark Testing, Lining Repair.
- Quality Spare Parts, both OEM and Aftermarket.



Process Heating Solutions Worldwide

Pulp & Paper Industry Case History

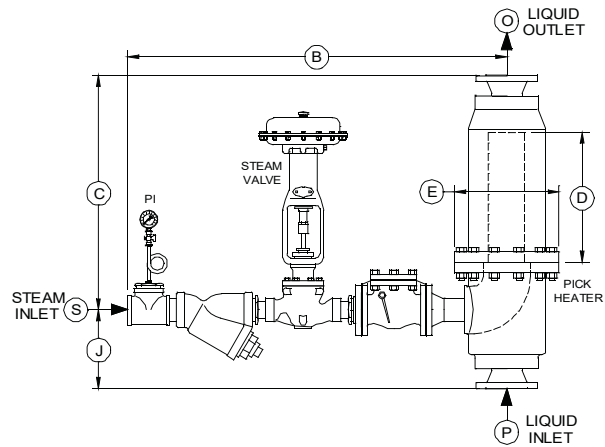

Lime Mud Pre-Coat Filter Showers

Application

A pulp mill located in Southern Georgia required 140°F wash water for the lime mud pre-coat filter. Located in the recausticizing area, the filter washes and dewateres lime prior to the lime kiln. The wash water provides both an efficient dilution wash of lime mud as well as serving to keep the filter clean, improving drainage. The customer replaced a venturi style heater for two main reasons: severe hammer to filter system piping and wide swings in discharge temperature.

Process Conditions

Water Flow Rate:	150-400 GPM
Temperature Rise:	70°F
Discharge Temperature:	140°F
Steam Pressure:	150 PSIG
Water Pressure:	50 PSIG

Solution

Pick 6X150-3 Constant Flow Heater, 316 stainless steel construction. Normal liquid outlet assembly was deleted for easy installation and direct replacement within piping area of venturi heater.

Features and Benefits:

- Smooth, Stable Operation
- Precise Temperature Control
- Low Mechanical Shear
- Compact Design
- Complete Absorption of Steam within Heater Body

Learn more at www.pickheaters.com

Pick Heaters, Inc. — 730 S. Indiana Ave. — West Bend, WI 53095 USA
Phone: (262) 338-1191 — Email: info1@pickheaters.com