

IMPACT INSULATED GLASS

Tempered / Laminated Insulated Glass: 
Kuraray SentryGlas®: NOA: 20-0915.19

Heat strengthened SGP:

LoE COATING & TINT OPTIONS

LoE³366/ Argon (green tint)

LoE366/Argon: U=.24, SHGC=.27, VLT=66%

LoE³340/ Argon (blue tint)

LoE340/Argon: U=.25, SHGC=.18, VLT=39%

Bronze Tint/ Argon

Bronze Tint/Argon: U=.45, SHGC=.62, VLT=61%

Gray Tint/ Argon

Gray Tint/Argon: U=.45, SHGC=.60, VLT=57%

Other:

**White Laminated, Obscure, Satin Frosted, or many other glass options available up request

FRAME FINISH OPTIONS

Mill Finish

Bronze

Clear Anodized

White Painted

SKYLIGHT DIMENSION

Inside Dimension of Pre-finished Skylight Frame (Finished RO/Roof Opening)


SIZE=

QTY=

MODEL DGCF (2pc Self Flashing) - IMPACT RESISTANT INSULATED GLASS

(Solid wood frame & 3/8" white solid pvc interior w/ aluminum counter flashing)

DESIGN PRESSURE: +100psf / -100psf

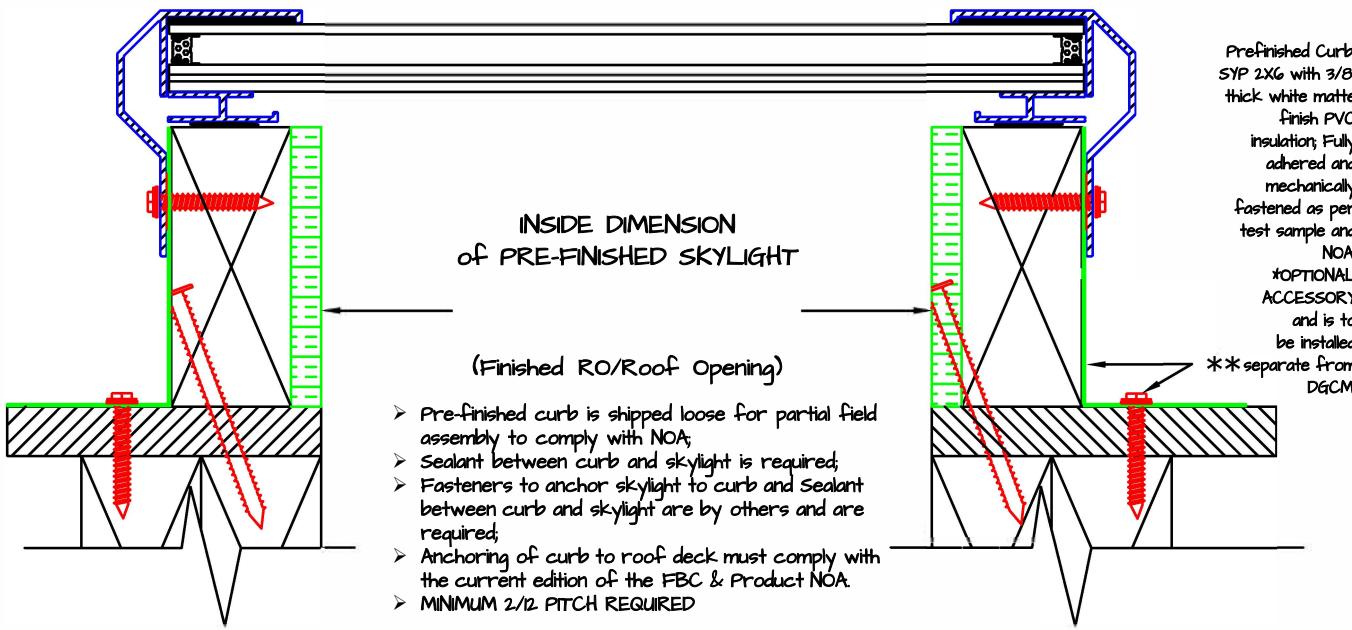

Miami-Dade NOA 23-0301.03 · TDI Report SK-18 · NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/1.5.2/A440-II

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

**Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast

**Meets OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Maxim Test loads= minimum 900 ft/lbs up to >3000 ft/lbs

**Meets Forced Entry Protection ASTM FS88 & UL 972

APPROVAL SIGNATURE & DATE



Lazer Manufacturing & Distributing Co., Inc.

S.E Regional Warehouse - 7051 SW 21 PLACE DAVIE, FL 33317