

Genset control KEA 320 / KEA 320 RP

Data sheet



KEA 3X0 is also available for back panel installation with touch screen remote panel.

General

Genset controls of KEA 3X0 series are used in standard as well as complex applications for emergency power generation. The successor of reliable KEA 2X0 provides a significantly extended scope of functions based on an industry-leading system platform. KEA 3X0 complies with all current standard specifications for emergency power applications. Equipped with a comprehensive pre-configuration KEA 3X0 is the ideal compact genset control for generator packages and system integrators.

KEA 320 includes specifically designed algorithms and logic to start, stop, control, and protect the genset, circuit breaker and the utility, where applicable. It allows standardizing on a single, affordable genset controller for distributed power generation applications. The applications range from single stand-alone emergency backup power to parallel load sharing of multiple gen-sets in complex, segmented distribution systems with multiple utility feeds and tie breakers.

The versatile KEA 3X0 sets new standards in power management and parallel operation of gensets. At island or parallel operation mode load sharing of up to 32 gensets can be realized with a single utility. KEA 3X0 combines complete engine-generator control and protection with advanced, peer-to-peer paralleling functionality and innovative features in a robust, attractive, user-friendly and all-in-one package.

Its integrated programmable logic functionalities provide outstanding application flexibility and can often eliminate the need of an additional PLC control, yet can easily integrate with SCADA or PLC-based control systems where desired. Enhanced connectivity enables fast and secure interfacing to other controls and communications systems

KEA 320 also comes without a display in a rugged metal housing suitable for back panel installations. A sophisticated touch screen remote panel complements it as an operator control panel.

Function overview

- Standard paralleling applications for up to 32 generators in
 - Peak shaving operation
 - Stand-by operation
 - AMF (Automatic Mains Failure) operation
 - Emergency operation
 - Import/Export operation
 - Islanded & Utility parallel operation
 - Microgrids / Hybrid plants
- Easy to set up and commission
- Master or Slave control capability
- Complete engine, generator and utility protection
- Synchronization logic
- Five communication ports: Ethernet, 2xCAN (CANOpen and J1939), RS-485, USB
- Customizable logic, HMI screens, and alarms
- Dedicated low temperature display variants
- UL 61010-, UL 6200-, 2011/65/EU-conform and marine compliant (ABS, LR)

Easy-to-use software tools simplify configuring the genset controls of KEA 3X0 series while making it easy to customize the unit for specific applications.

FlexApp™ – This feature provides the tools to easily configure the number of operated breakers: None, Generator Circuit Breaker (GCB), and Mains Circuit Breaker (MCB).

LogicsManager™ & AnalogManager™ (LM & AM) – LM/AM enables to customize the operation sequences and adapt them to specific needs. The LM/AM accomplishes this by handling a range of measuring values and internal states, which are combined logically with operators and programmable timers and can be cascaded through. This enables to create and/or modify control and relay functions.

FlexIn™ – The analog inputs are configurable to operate with variable resistance sensors (0 to 2000 Ω), (0 to 1V) and/or 0 to 20 mA senders.

Flexible Outputs – Speed and voltage bias outputs are configurable to function with all speed governors and voltage regulators. The outputs can also be used as freely scalable outputs (e.g. for driving external meters).

FlexCAN™ – Advanced network interfaces ensure unsurpassed control performance – from engine control up to total plant operation. The KEA 3X0 series is capable of working with common industrial interfaces, including Ethernet, CAN, USB, and RS-485. The multiple communication protocols permit the KEA 3X0 series controls to communicate with a vast majority of engine control units (ECUs), external I/O boards, and PLCs. Modbus TCP, CANopen, SAE J1939, and Modbus RTU are supported.

DynamicsLCD™ – The adaptive and interactive 5.7", 320x240 pixel sharp color graphical LCD display with soft keys and a clear menu structure ensures intuitive user operation and navigation. Customizable screens provide flexibility to program and visualize frequently used data at the press of a button. The face plate with tactile and illuminated buttons enhances the aesthetics and ergonomics of push button operation.

Features

- Three-phase true RMS power sensing with Class I accuracy
 - Operation modes: AUTO, STOP, MANUAL, and TEST modes accessible through face plate or discrete input
 - Breaker control: Slip frequency/phase matching synchronization, open/close control, breaker monitoring
 - Load transfer: open/closed transition, interchange, soft loading/unloading, Utility parallel
 - Load share and device to device communication over Ethernet or CAN ("warm redundancy" possible)
 - Remote control via interface (Modbus TCP, Modbus RTU) and via discrete/analog inputs for adjusting speed, frequency, voltage, power, reactive power, and power factor set points
 - Freely configurable PID controllers for various control purposes, such as heating circuit control (CHP applications), water level, fuel level, pressure and/or other process values
 - Direct support to several ECUs: Scania S6, MTU ADEC ECU7/8, Volvo EMS2 & EDC4, Deutz EMR2 & EMR3, MAN MFR/EDC7, SISU EEM, Cummins and Woodward EGS02 ECU
 - Field ECU support and additional I/O expansion board connectivity through sequencer files
 - "System Update" function for online troubleshooting and adding / removing generator sets
 - Time/Date synchronization over Simple Network Time Protocol (SNTP)
 - Cylinder head/exhaust temperature monitoring (Temperatures come from J1939 or CANopen devices)
 - ToolKit™ software for flexible setup from a single connection to the network. The ToolKit can be accessed either via USB, or via Ethernet, or via CAN port.
- Multi-lingual capability: English, German, Spanish, French, Italian, Portuguese, Japanese, Chinese, Russian, Turkish, Polish, Slovakian, Finnish, Swedish

Related products

- Engine Speed Control actiVgen (Product Specification # 03419): P/N 2DVGEN0000
- Remote Panel RP 300 (Product Specification # 37592): P/N 2A300R0700
- ToolKit (Product Specification # 03366)
- I/O Expansion Board IKD1 (Product Specification # 37171): P/N 2RIKD1M000
- Load Share Gateway LSG (Product Specification #. 37451)
- Electronic Pickup Unit EPU-100 (Product Specification #. 37562): P/N 2DEPU10000
- CANbus based Remote Annunciator easYlite 100 (Product Specification #. 37279): P/N 2A300REL06
- Power Generation Learning Module (Product Specification #. 03412): P/N 2SPGLM0000
- Profibus Gateway ESEPRO (Application Note # 37577): P/N 2GESEPRO00
- Ethernet (Modbus/TCP) Gateway ESENET (Application Note # 37576): P/N 2GESENET00
- CANbus to Fiber Optic Converters (Application Note # 37598):
DL-CAN P/N 2GDLCANS00 and DL-CAN-R P/N 2GDLCANR00
- Remote Access Gateway (with HMS Netbiter EasyConnect EC250 and EC350)
- Thermocouple Scanner AXIOMATIC AXTC20
- WAGO and Phoenix expansion CAN couplers


Technical Data

| | |
|--|--|
| General | |
| Power supply | 12/24 VDC (8 to 40 VDC) |
| Intrinsic consumption | max. 14 W (LT: max.22W) |
| Ambient temperature (operation) | -20 to 70 °C (LT: -40 to 70 °C) |
| Ambient temperature (storage) | -30 to 80 °C / -22 to 176 °F |
| Ambient humidity | 95%, non-condensing |
| Voltage (software configurable) | |
| 100 Vac Rated (V_{rated}) | 69/120 V _{AC} |
| Max. value (V_{max}) | 86/150 V _{AC} |
| and 400 Vac Rated (V_{rated}) | 277/480 V _{AC} |
| Max. value (V_{max}) | 346/600 V _{AC} |
| Rated surge volt. (V_{surge}) | 4.0 kV |
| Accuracy | Class 0.5 |
| Measurable alternator windings | 3p-3w, 3p-4w, 3p-4w OD, 1p-2w, 1p-3w |
| Setting range primary | 50 to 650,000 V _{AC} |
| Linear measuring range | 1.25x V_{rated} |
| Measuring frequency | 50/60 Hz (40 to 85 Hz) |
| High Impedance Input; Resistance per path | 2.0 M Ω |
| Max. power consumption per path | < 0.15 W |
| Current (Isolated, software configurable) | |
| Rated (I_{rated}) | 1A or 5A |
| Linear measuring range | $I_{gen} = 3.0 \times I_{rated}$ |
| | $I_{mains/ground} = 1.5 \times I_{rated}$ |
| Setting range | 1 to 32,000 A |
| Burden | < 0.10 VA |
| Rated short-time overcurrent (1 s) | [1] 50x I_{rated} , [5] 10x I_{rated} |
| Accuracy | Class 0.5 |
| Power | |
| Setting range | 0.5 to 99,999.9 kW/kvar |
| Accuracy | Class 1.0 |
| Discrete inputs | |
| Input range | 12/24 V _{DC} (8 to 40 V _{DC}) |
| Input resistance | approx. 20 kOhms |
| Relay outputs | |
| Contact material | AgCdO |
| Load (GP) | 2.00 A _{AC} @250 V _{AC} ; 2.00 A _{DC} @24 V _{DC} / 0.36 A _{DC} @125 V _{DC} / 0.18 A _{DC} @250 V _{DC} |
| Analog inputs (isolated) | |
| Type | freely scalable |
| Resolution | 0 to 1V / 0 to 2000 Ohms / 0 to 20 mA |
| Resolution | 16 Bit |
| Maximum permissible voltage against genset Ground | 9 V |
| Maximum permissible voltage between genset Ground & PE | 100 V |


| | |
|--|--|
| Analog outputs (isolated) | freely scalable |
| Type | $\pm 10\text{ V}$ / $\pm 20\text{ mA}$ / PWM |
| Basic insulation voltage (continuously, AVR_{out}) | 500 V_{AC} |
| Reinforced insulation voltage (continuously, AVR_{out}) | 300 V_{AC} |
| Insulation voltage (continuously, Gov out) | 100 V_{AC} |
| Resolution | 12 Bit |
| $\pm 10\text{ V}$ (scalable) | internal resistance |
| $\pm 20\text{ mA}$ (scalable) | maximum load 500 Ohms |
| Housing Front panel flush mounting | Plastic housing |
| Dimensions WxHxD | 282 x 216 x 96 mm |
| Front cutout WxH | 249 [+1.1] x 183 [+1.0] mm |
| Connection | screw/plug terminals 2.5 mm ² |
| Front | insulating surface |
| Sealing | |
| Front | IP66 (with screw fastening) |
| Front | IP54 (with clamp fastening) |
| Back | IP20 |
| Weight | approx. 1,850 g |
| Housing Back panel mounting | Powder Coated Sheet metal housing |
| Dimensions WxHxD | 250 x 227 x 50 mm |
| Connection | screw/plug terminals 2.5 mm ² |
| Protection system | IP 20 |
| Weight | approx. 2,150 g |
| Disturbance test (CE) | tested according to applicable IEC standards |
| Listings | CE, UL, EAC, VDE, BDEW, CSA |
| Marine | LR (Type Approval), ABS (Type Approval) |

Dimensions


Plastic housing for front panel mounting

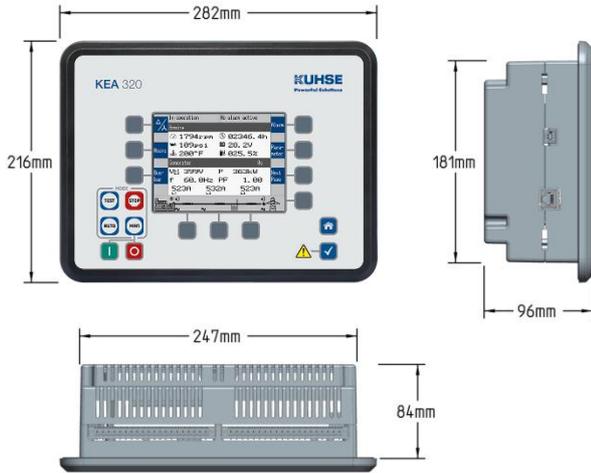

Metal housing for cabinet mounting

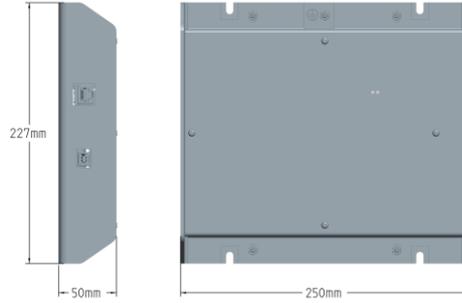

Remote Panel

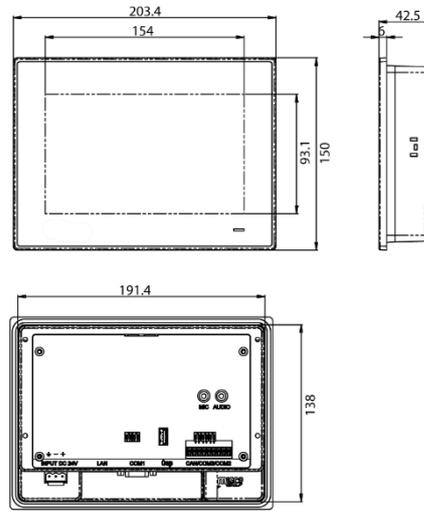

Terminal diagram

| Mains Gnd Current AC 1 A 5 A | | Generator Current AC 1 A 5 A | | | | | | Analog Inputs 0 to 2 kOhm 0/4 to 20 mA 0 to 1 V | | | | | | | Analog Outputs ±10 Vdc ±20 mA PWM | | | | |
|--------------------------------------|----|-----------------------------------|------|------|------|------|------|--|-------|-------|------------------|----------------|------------------|-----------|--|------------------------------|----|----|----|
| L1 | s2 | s2 | s1 | s2 | s1 | s2 | s1 | AI 01 | AI 02 | AI 03 | Engine Ground | Speed AO 01 | Voltage AO 02 | NC | + | - | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| NC | L1 | NC | L2 | NC | L3 | NC | N | NC | L1 | NC | L2 | NC | L3 | NC | N | NC | L1 | NC | L2 |
| 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 |
| 60 | 59 | 58 | 57 | 56 | 55 | 54 | 53 | 52 | 51 | 50 | 49 | 48 | 47 | 46 | 45 | 44 | 43 | 42 | 41 |
| Relay Outputs | | | | | | | | | | | | | | | | | | | |
| 80 | 79 | 78 | 77 | 76 | 75 | 74 | 73 | 72 | 71 | 70 | 69 | 68 | 67 | 66 | 65 | 64 | 63 | 62 | 61 |
| MPU | | D112 | D111 | D110 | D109 | D108 | D107 | D106 | D105 | D104 | D103 | D102 | D101 | Common DI | Auxiliary Excitation D+ | Power Supply 12/24 Vdc | | NC | * |
| Discrete Inputs | | | | | | | | | | | | | | | | | | | |

* Pin 61
KEA 320 RP-P1: No connection
KEA 320-P1: Protective earth

Function overview

| Variant | KEA 3X0 Series | |
|--|-----------------------------------|----------|
| | 320 RP | 320 |
| Package | P1 | P1 (-LT) |
| Measuring | | |
| Generator voltage (3-phase/4-wire) | 120 / 480 V AC | |
| Generator current (3x true r.m.s.) | 1 / 5 A | |
| Mains voltage (3-phase/4-wire) | 120 / 480 V AC | |
| Mains or ground current (1x true r.m.s); Mains or ground current (selectable) | 1 / 5 A | |
| Busbar voltage | 1-phase / 2-wire / 120 / 480 V AC | |
| Control | | |
| Generator breaker control | ✓ | |
| Mains breaker control | ✓ | |
| Generator group breaker | - | |
| Run-Up Synchronization | - | |
| No of supported LS-5-devices (1 or 2 breaker controls) | - | |
| Breaker control logic (open and closed transition <100 ms) | 2 | |
| Automatic, Manual, Stop, and test operating modes | ✓ | |
| Single and multiple-unit operation | ✓ | |
| Mains parallel multiple-unit operation (up to 32 units) | ✓ | |
| AMF (auto mains failure) and stand-by operation | ✓ | |
| Critical mode operation | ✓ | |
| GCB and MCB synchronization (±slipping / phase matching) | ✓ | |
| Import / export control (kW and kvar) | ✓ | |
| Load-dependent start/stop | ✓ | |
| n/f, V, P, Q, and PF control via analog input or interface | ✓ | |
| Load/var sharing for up to 32 gensets | ✓ | |
| Freely configurable PID controllers | 3 | |

| Variant | KEA 3X0 Serie | |
|--|---------------|--------------------|
| | 320 RP | 320 |
| Package | P1 | P1 (-LT) |
| HMI | | |
| Display | remote | integrated |
| Color Display with Softkey operation | - | ✓ |
| Start/stop logic for diesel / gas engines | ✓ | |
| Counters for operating hours / starts / maintenance / active/reactive energy | ✓ | |
| Configuration via PC (serial connection and ToolKit software (included)) | ✓ | |
| Event recorder entries with real time clock (battery backup) | 1000 | |
| Operating Temperature | -40 to 70 °C | (-40/)-20 to 70 °C |
| Protection | | |
| Mains failure protection acc. to VDE 4105 | ✓ | |
| Busbar: voltage/frequency/rotation field | - | |
| I/Os | | |
| Internal digital I/O expansion board | - | |
| Speed input: magnetic / switching; Pickup | ✓ | |
| Battery voltage monitor | 1 | |
| Discrete alarm inputs (configurable) | 12 (10) | |
| Discrete outputs, configurable | max. 12 | |
| External discrete inputs / outputs via CANopen | 32/32 | |
| Analog inputs #1, configurable | 3 | |
| Analog outputs: +/- 10V, +/- 20mA, PWM; configurable | 2 | |
| External analog inputs / outputs via CANopen | 16 / 4 | |
| Display and evaluation of J1939 analog values, "supported SPNs" | 100 | |
| CANbus communication interfaces #2, #3 | 2 | |
| Ethernet Modbus TCP Slave interface #3 | 1 | |
| USB Serial interface | 1 | |
| RS-485 Modbus RTU Slave interface | 1 | |
| Listings/Approvals | | |
| CE Marked, VDE, EAC, BDEW | ✓ | |
| Part Numbers | | |
| Front panel mounting with display #4 | - | 2A320CS100 |
| Cabinet back mounting without display | 2A320RS100 | - |
| Spare connector kit | 2A320PS100 | 2A320PS100 |

#1 selectable senders: VDO (0 to 180 Ohm, 0 to 5 bar), VDO (0 to 180 Ohm, 0 to 10 bar), VDO (0 to 380 Ohm, 40 to 120°C), VDO (0 to 380 Ohm, 50 to 150°C), Pt100, Pt1000, resistive input (one- or two-pole, 2pt. linear or 9pt. user defined)

#2 CAN#2 freely selectable during configuration between CANopen or J1939; please feel free to request more information

#3 It is possible to toggle between CAN and Ethernet load share line in STOP mode ("warm redundancy")

#4 a screw and a clamp kit are delivered with the unit for fastening