





COMMERCIAL & RESIDENTIAL SECURITY

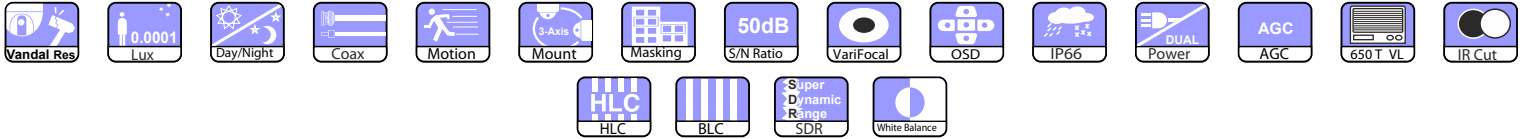

The DTV-VLD/PRO/W6 is our high end vandal resistant dome camera. The camera is fitted with a 2.8-11 mm vari-focal lens and offers 650TVL along with exceptional low light capability enabling outstanding image quality in the most testing of environments. Alongside these features, the camera has built in UTP balun and removable IR cut filter for use with infra red lighting. Manufactured to the highest standards with an aluminium casing and tough polycarbonate window, the DTV-VLD/PRO/W6 offers top quality vandal resistance and full IP66 weather protection.

**Features:**

- Sens-up 0.0001 lux (14 leels up to 512x)
- 2.8-11 mm lens
- 650 TV lines
- 3 axis bracket for wall mounting
- Adjustable back light compensation
- Adjustable white balance
- Digital Noise Reduction for noise reduction & disk saving
- Privacy Masking - 12 programmable zones
- Mirror function - horizontal & vertical image inversion
- True Day Night with IR Cut Filter
- SDR (Super Dynamic Range)
- Automatic Gain Control
- Motion Detection
- IP66
- Built-in UTP Balun
- Coaxial Control (Pelco Coaxitron Protocol)

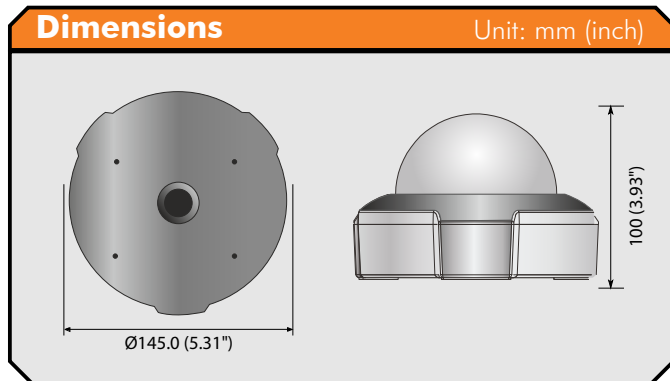

DTV-VLD/PRO/W6	
<b>ELECTRICAL</b>	
<b>Input Voltage</b>	12V DC 230mA / 24V AC, 160mA
<b>VIDEO</b>	
<b>Imaging Device</b>	1/3" Super HAD CCD
<b>Total Pixels</b>	1029 (H) x 596 (V)
<b>Effective Pixels</b>	976 (H) x 582 (V)
<b>Scanning System</b>	2:1 Interlace
<b>Synchronisation</b>	Internal
<b>Frequency</b>	H: 15.624 kHz / V: 50 Hz
<b>Horizontal Resolution</b>	650 TV Lines
<b>Min. Illumination</b>	Colour: 0.05Lux (50 IRE@F1.2), 0.0001 Lux (Sens-Up, 512x)
<b>S/N (Y Signal)</b>	52dB (AGC Off)
<b>Video Output</b>	1.0Vp-p/75 (Video 0.714Vp-p Sync 0.286Vp-p)
<b>LENS</b>	
<b>Lens</b>	2.8-11mm Vari Focal
<b>Auto Iris</b>	Direct Drive
<b>Aperture ratio</b>	f1.2
<b>Min. Object Distance</b>	0.5m (1.64ft)
<b>Angular Field of View</b>	H: 25°, V: 19° / H: 82.5°, V: 67°
<b>PAN / TILT</b>	
<b>Pan Range</b>	0° ~ 360°
<b>Tilt Range</b>	20° ~ 90°
<b>OPERATIONAL</b>	
<b>DNR</b>	On / Off (1-32 Levels)
<b>Motion Detection</b>	On / Off (8 programmable zones)
<b>Sens-Up</b>	Auto / Off (Selectable x2 - x512)
<b>Gain Control</b>	Off / Low / Middle / High
<b>White Balance</b>	ATW / AWC / Manual (1,800°K - 10,500°K)
<b>Electronic Shutter Speed</b>	Auto / Manual (1/60 - 1/120,000)
<b>Privacy Function</b>	On / Off (12 programmable zones)
<b>Mirror</b>	Built-in (Horizontal and Vertical Image Inversion)
<b>ENVIRONMENTAL</b>	
<b>Operating Temp / Humidity</b>	-10°C - +50°C / 30% - 80% RH
<b>Storage Temp / Humidity</b>	-20°C - +60°C / 20% - 90% RH
<b>MECHANICAL</b>	
<b>Dimension (WxH)</b>	145 x 100mm



Paston Gold Registered