

MIDWAY ROV

“Find a way through”

Designed to reach inaccessible areas, the Midway can fly through a 12 inch pipe. It has many features of a larger ROV; 4 lateral thrusters and 2 vertical thrusters for improved maneuverability, 2 lights, optional grabber, a surface power supply, and even space for an imaging sonar. The Midway provides plenty of tools for different missions. The SPU-LITE console keeps the weight down without sacrificing safety and the system is compatible with commonly available tethers with MacArtney Subconn MC series 8 pin connectors. Optional fiber upgrade enables tethers from 1,000 to 5,000ft.




ROV Specifications

ROV Dimensions	10in Diameter x 16.9in Length
ROV Weight	18lbs
Payload Capacity	3lbs (fresh water)
Thruster layout	4 lateral (45deg), 2 vertical
Power	1,000W at ROV
Depth rating	1,000ft (305m)
Lights	2x 1,500 Lumens
AUX ports	1xEthernet/RS232/485/
Tether	9mm OD, up to 1,000ft
Case Dimensions	26x18x16in



Console Specifications

Dimensions	19.5x11x7.8in (LWH)
Weight	24 lbs
Input	90-260VAC, 50/60Hz
Output	400VDC, 3kW
Screen	15.6in, 1,000 NIT

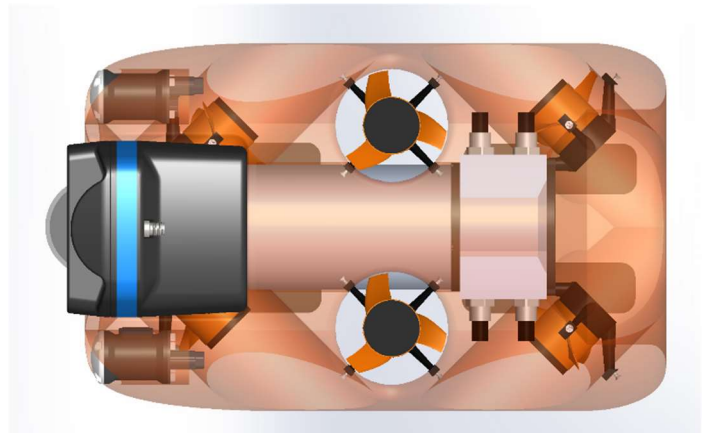

POSEIDON ROBOTICS

Chandler, Arizona, US
TF: (800) 882 3413 (US)
International: +1 520 208 4815

