





CITY TRANSPORTER

Styling









Interior



Instrument Panel









Luggage Compartment

Overhead Luggage Compartment



[L:480mm x W: 320mm x H:180mm]

- EXECUTIVE TRANSPORTER
- PRIVATE REGISTRATION APPLICABLE
- · EASY TO MANEUVER
- •28 MURID² SEKOLAH


Powertrain



- 1. Turbocharged intercooler
- 2. BOSCH high pressure common rail fuel system
- 3. Reasonable lightweight design
- 4. Efficient low emission design

Maximum torque speed (N.m/rpm): 260 / 2000

Rated power/speed (kW[Hp]/rpm): 80 [107] / 3400

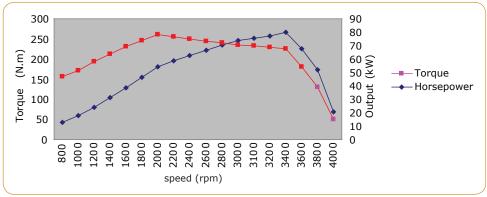

GETRAG five-speed transmission

	Gear Ratio	1st	2nd	3rd	4th	5th	Reverse
		4.717	2.513	1.679	1.000	0.719	4.497



Advance Technology



Closed Ring Entire Framework Body, full-length welding roof and brazing column ensure the usability under all road conditions. The integral electrophoresis is applied after the welding is finished, which ensures the weatherability of vehicle.





Co-Star adopts 5-star level bus special chassis and efficient engine system according to the overall dynamic performance matching needs.


CAM Co-Star 2.8L CDTi Specification

ENGINE										
Parameter	rameter Engine Type		In Line 4 Cylinders, 16-Valve, DOHC, Common Rail Turbo Intercooler Engine, Electronically Controlled							
	Displacement (L)	2.771 L								
	Bore x Stroke	93mm x 102mm								
Rated Output (kW[HP]/r		80 [107]/ 3400								
	Torque (Nm/rpm)		260 / 2000							
Compression	ompression Ratio		17.20							
Top Speed*	op Speed*		≥110km/h							
Fuel Standard	Fuel Standard Fuel Tank Capacity (L)			Diesel 70						
Fuel Tank Cap										
TECHNI	CAL DIMENSION									
Overall – Len	gth x Width x Height (mm)			5995 x 20	050 x 2630					
Wheelbase (r	nm)	3300								
Wheel Threa	Wheel Thread (Front / Rear) (mm)			1665 / 1525						
Front Overha	ng / Rear Overhang (mm)	1150/1540								
Min Ground	190									
SEAT										
Seating Capa	city	20								
MASS										
Gross Vehicle	Weight (kg)	4950								
Curb Weight	Curb Weight (kg)			3475						
CHASSI	S & SUSPENSION									
Steering	Steering			Hydraulic Power Steering						
Min Turning I	6.8m									
Brake System	ABS + Hydraulic two-way loop enhanced braking system, with exhaust brake and LSPV									
Suspension S	ystem	Non Independent; Leaf Spring (Front 3/Rear 4)					r 4)			
Wheel Size		Rim: 5.5F-16								
Tire			7.0	OR16 12PF	R Tubeless	Tyre				
Clutch		Single, Dry Hydraulic Diaphragm Spring								
GEARBO	X									
Transmission	Туре	GETRAG JC528 5MT								
Gear Ratio		1st	2nd	3rd	4th	5th	Revers			
Drive Avla (N	lain Reduction Ratio)	4.717	2.513	1.679	1.000	0.719	4.497			
ELECTR:										
Battery		12V								
Dattery		14V/120A								

FEATURES & ACCESSORIES								
6.5 Inches LCD Screen DVD Player With 4 Speakers		ord Lifting Door Ote Control)	Front Windshield Sunshade					
Reverse Camera & Reverse Sensor	Bamboo Plywood + S	ynthetic Leather Floor	Anti Collision Strip					
Stainless Steel Wheel Casing	Emergency Exit With Roof Ventilator Interior Cabin Lamp		Inner Luggage Rack					
Sliding Windows			Digital Clock With Thermometer					
Luxury Synthetic Leather Seats With 3 Point Safety Belt (Seats Adjustable)	Curtain	Interior Top Handrail	Cigarette Lighter	Console Box				

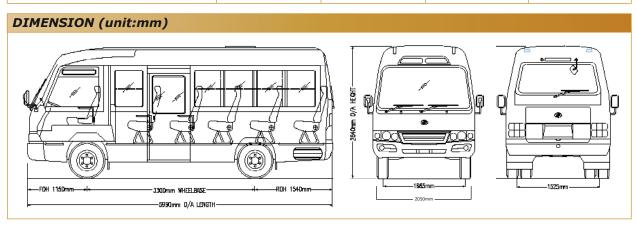

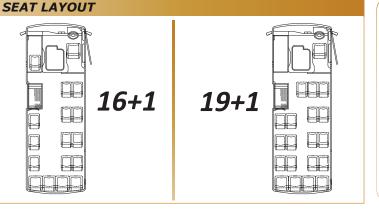









Certified By





R&A MARKETING SDN BHD

Sendok Group Building, Lot 1564, Batu 4, Jalan Kapar, 42100 Klang, Selangor Darul Ehsan, Malaysia Tel: +603-33455600 Fax:+603-32919658 E-mail: info@sendokgroup.com **f** CAM Malaysia





CONSISTENT | ACTIVE | MOBILE www.cammalaysia.com.my