



Refreshed























REFRESHED LOOK




DRIVING









COMFORT




Premium Semi Leather Seats with 18 USB Points

INTERIOR



Rear Foldable Seats for Extra Luggage Space







Wide Opening Sliding Door



DISPLACEMENT	3.0L
RATED OUTPUT (kW(HP)/rpm)	110 (149) / 3400
MAX TORQUE (N.m/rpm)	350/1800-2600
COMPRESSION RATIO	17.3:1




HIGH CAPACITY TURBO CHARGER

To achieve the maximum power & torque by lower engine capacity and hence improve fuel efficiency



DK5B ENGINE

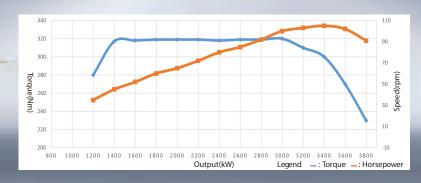

	TRANSMISSION		GEAR RATIO						
			1	2	3	4	5	6	R
	3.0L	6 SPEED MANUAL	4.313	2.330	1.436	1.000	0.838	0.696	4.220


ACTIVE SAFETY

PASSIVE SAFETY

ABS (ANTILOCKING BRAKE SYSTEM)

Keeps wheels from locking and skidding while braking. It improves Placer-X's control and maximizes braking effects on various road conditions, speed, loading etc. to maximize stopping power.





INTELLIGENT BRAKE ASSISTANCE SYSTEM

Commonly equipped in luxury sedan car will automatically respones to emergency shorten the braking distance.

BODY FRAME


CRUMPLE ZONES

Anti-overturn body frame made of strengthened substantially improves body firmness and reduces noise and vibration during driving.



ENERGY-ABSORBING DEVICE OF BRAKE PEDAL

This limits the degree of the brake pedal intrusion towards driver to minimize injury of legs.



ENERGY-ABSORBING DEVICE OF STEERING COLUMN

In frontal collision, the steering column will contract at several points and away from driver to minimize the risk of injury.



The Placer-X's crumple zones construction combined with upper, lower and side impact beams will absorb the collision energy for class-leading safety.

Specification

Placer-X

Specification	Placer-A
ENGINE	
Engine	DK5B
Engine Type	In Line 4 Cylinder, 16-valve, Common Rail Turbocharged With Intercooler, Diesel Engin
Bore x Stroke	96x103
Emission Standard	EURO-IV
Displacement (L)	2.982
Rated Output (kW(HP)/rpm)	110(149)/3400
Max. Torque (N.m/rpm)	350/1800-2600
Compression Ratio	17.3:1
Top Speed *	170km/h
Fuel Standard	Diesel
Fuel Tank Capacity	70 Litre
	70 Little
DRIVING SYSTEM Transmission Type	Manual 6 - Speed
Gear Ratio	
Clutch	1st: 4.3134, 2nd: 2.330, 3rd: 1.4364, 4th: 1.0000, 5th: 0.838, 6th: 0.696, Reverse: 4.22 Single disc, Hydraulic Control
Driving Type	Front Engine, Rear Drive
Brake System	ABS+EBD, Intelligent Brake Assistance System Front Double Pot Disc; Rear Drum
Suspension	Front Transverse Double Wishbone Independent Suspension, Rear Variable Rate Leaf Sprin
TECHNICAL DIMENSION	Front transverse bouble wishbone independent suspension, kear variable kate tear sprin
Overall LxWxH (mm)	5990 x 1880 x 2285
Wheelbase (mm)	3720
Ground Clearance (mm)	169
Gross Vehicle Weight (kg)	4000
Curb Weight (kg)*	2500
Seating Capacity	17 Seats
Tire	215/75R 16C
Minimum Turning Radius (m)	12.5
FEATURES AND ACCESSORIES	
Audio Systems	Display Audio With 7" Touch Screen LCD, MP3, USB, AUX & Bluetooth
Stereo Speaker	6 pcs
Reverse Camera	•
Reverse Sensor	•
Cabin Light	•
Ion Air Purifier	2 pcs
Seat Material	Semi Leather
Last Row Hanging Seat	•
Intermittent Front Wiper, Rear Wiper	•
Rear Windscreen with Demister	•
Tiltable Steering wheel	•
Central Locking	•
Remote Control	•
Side Mirror with Chrome-Plate and LED Turning Signal Lamp	•
Side Mirror Adjustment	Power
High-Mounted 3rd Brake Lamp	•
Projection Headlamp with DRL	
Front Fog Lamp	
Wheel Size	1CH All
Air-Conditioner-Front	16" Alloy
Air-Conditioner-Rear	Overhead Air Vents
Rear Evaporator	
·	Double
Middle Console Box with 2 Cup Holder	•
Luxury PVC Roof Lining	•
PVC Floor Mat	•
Moonroof	•
Silding Window	4
Power Window-Driver & Co-driver	•
Anti-Glare Rear View Mirror	•
Seat Belt	3 Point Seat belt



GOLD AWARD: THE PREFERRED VEHICLE BY TOURISM INDUSTRY












CONSISTENT I ACTIVE I MOBILE Sole Distributor of CAM

Sendok Group Building, Lot 1564, Batu 4, 42100 Klang, Selangor Darul Ehsan, Malaysia. Email: info@sendokgroup.com Tel: +603-3345 5600 Fax:+03-3291 9658











Branch & Dealer Chop

V1_022024

^{*} Data collected under testing condition. The result may differ due to different driving condition, overall vehicle weight etc.