

TOYOTA

LAND CRUISER 70 Series (LH/RH)

Model: VDJ 76, 78, 79 (2007-2024)


76 - Five-Door Wagon

78 - Troop Carrier/Troopy

79 - Cab-Chassis

Installation Instructions

Set of two (2) Inner Wheel Guards (LH/RH) replacement for driver and passenger front wheel arch, to protect the engine from mud and debris penetrating and damaging engine components. Our guards are made of a premium grade 3mm Reinforced Neoprene Rubber.

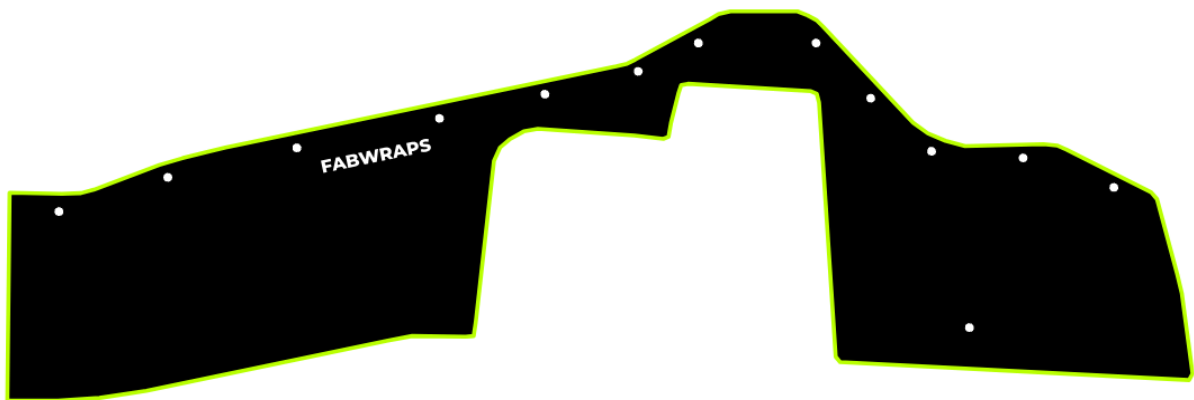

Maintenance

The rubber guards are anti-abrasion, tear and crack resistant and grease, fuels, oil and saltwater resistant. For long term protection from natural drying conditions and maintaining the hydrophobic qualities, an application of sealant can be applied.

Fitment

The guards are not designed to fit tightly, they are attached between the body and chassis and designed to move and flex as the vehicle navigates rough, uneven ground.

Remove the existing guards with a clip remover tool or wide flathead screwdriver.

Occasionally a hole may be a bit tricky to fit the clip or the hole is too big (a previous owner may have drilled it out), you may need to install a smaller/bigger clip to suit that hole.

You will require only moderate force to push the clips home, if they need a little more persuasion please use a small hammer with a gentle tap, too much force will break the clip.

Using the diagram below, insert the appropriate clips to the guard, and start to fit from the centre top working down each side.

Clips


6mm Body Clip (24) ○

Insert the clips into the guards, then find the correlating body holes before locking all clips securely into place.

7mm Chassis Clip (2) ☆

Secure through the guard into the chassis holes.

Driver Side (RH)

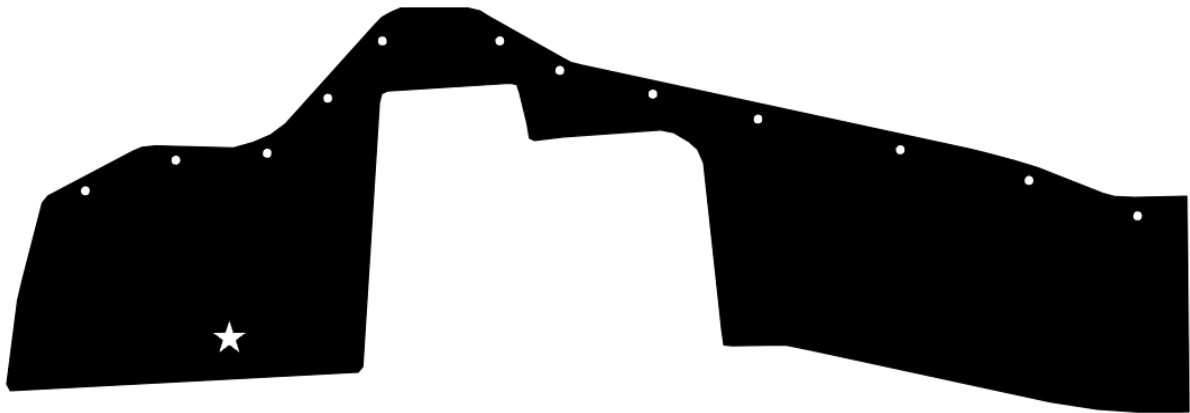

Passenger Side (LH)

