


TOYOTA HILUX N80 (LH/RH)

(2005-2015)

Installation Instructions

Set of two (2) Inner Wheel Guards (LH/RH) replacement for driver and passenger front wheel arch, to protect the engine from mud and debris penetrating and damaging engine components. Our guards are made of a premium grade 3mm Reinforced Neoprene Rubber.

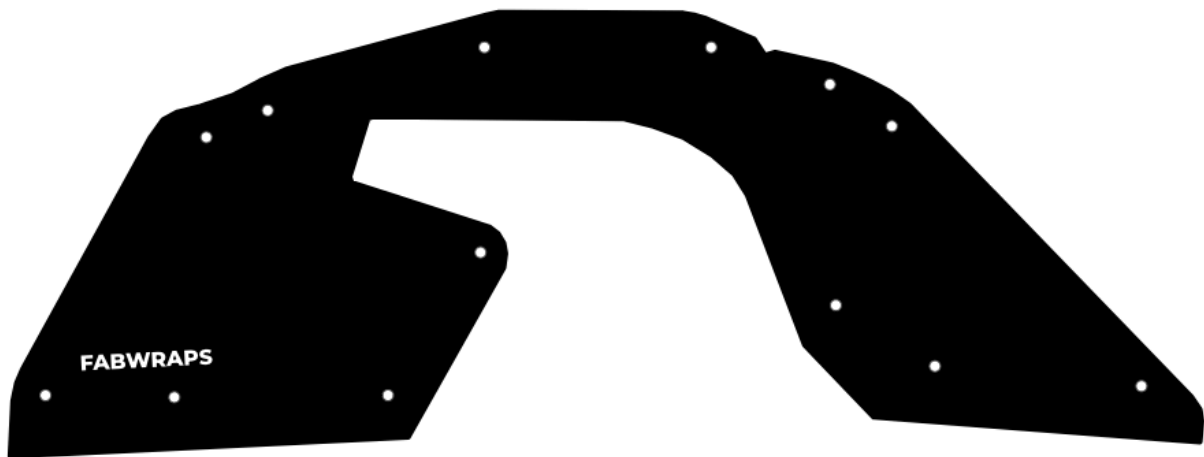

Maintenance

The rubber is crack, grease, fuels, oil and saltwater resistant. An application of rubber sealant should be applied for long term protection from natural drying conditions and to maintain the hydrophobic qualities.

Fitment

The guards are not designed to fit tightly, they are secured to the body and chassis and should allow for movement and flex as the vehicle navigates rough or uneven ground.

To install, you will need a clip removal tool or wide flathead screwdriver, small hammer to gently encourage the clips into place.


Using the diagram below, insert the appropriate clips to the guard, and start to fit from the centre top working down each side.

Clips

8mm Body/Chassis Clip (26) ○

Insert the clips into the guard and position into place before locking each clip securely into place into the body, chassis and strut tower. Lift the lower part of the guard slightly to locate the corresponding chassis hole.

Driver Side (RH)

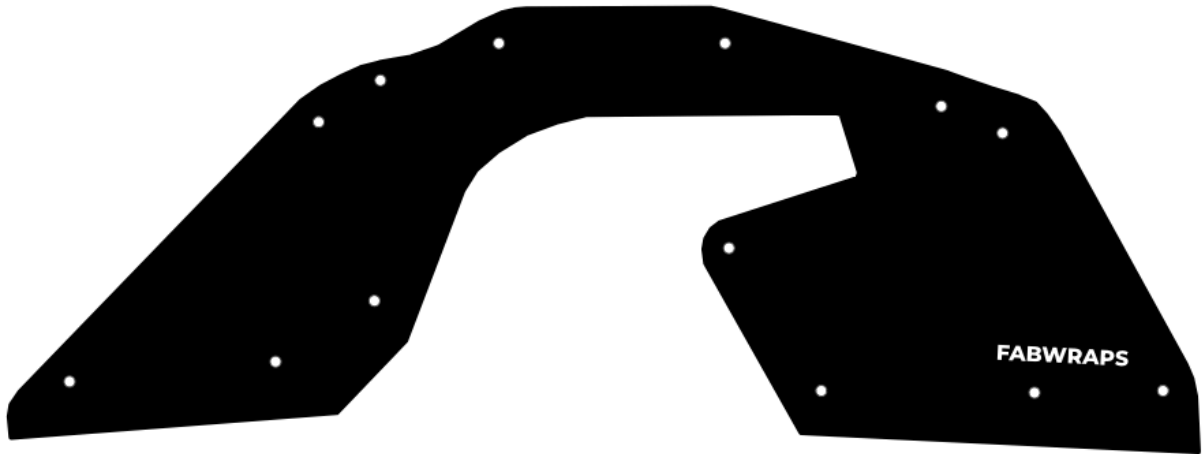

Passenger Side (LH)

