


NISSAN

PATROL GU Y61 (LH/RH)

(1997 - 2016) Not TB45

Installation Instructions

Set of three (3) Inner Wheel Guards (LH/RH) replacement for driver and passenger front wheel arch, to protect the engine from mud and debris penetrating and damaging engine components. Our guards are made of a premium grade 3mm Reinforced Neoprene Rubber.

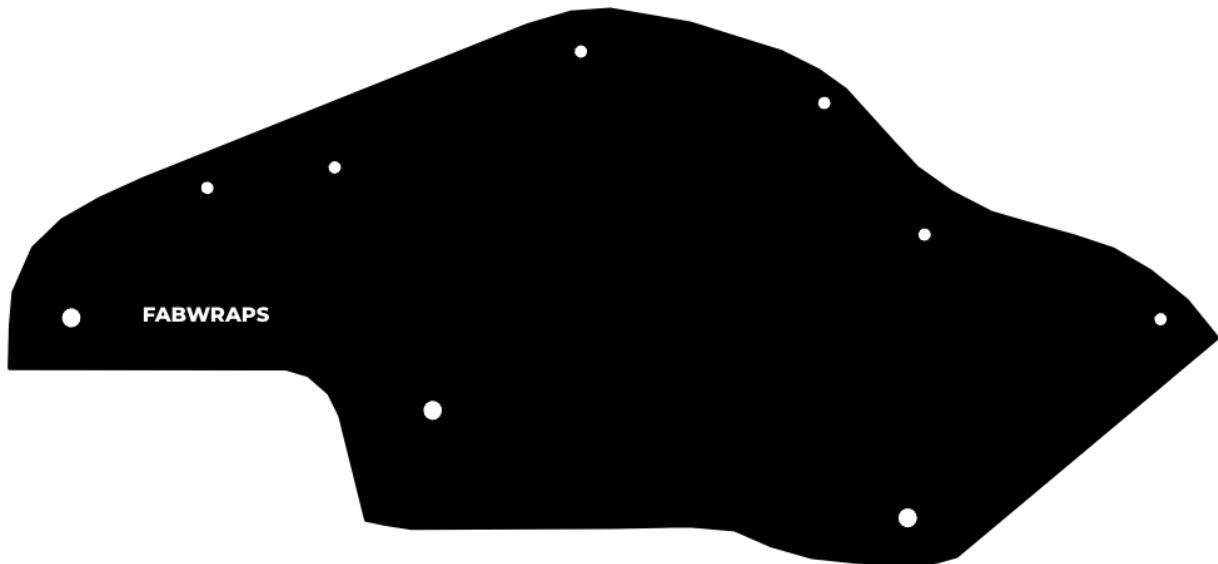

Maintenance

The rubber is crack, grease, fuels, oil and saltwater resistant. An application of rubber sealant should be applied for long term protection from natural drying conditions and to maintain the hydrophobic qualities.

Fitment

The guards are not designed to fit tightly, they are secured to the body and chassis and should allow for movement and flex as the vehicle navigates rough or uneven ground.

To install, you will need a clip removal tool or wide flathead screwdriver, small hammer to gently encourage the clips into place and gloves, some edges may be sharp.

Occasionally a hole may be a bit tricky to fit the clip into place, a previous owner may have drilled out the hole to enlarge it, in this instance you may need to install a clip to suit.

You will require only moderate force to push the clips home, if they need a little more persuasion please use a small hammer with a gentle tap, excessive force will break the clip.

Using the diagram below, first insert the appropriate clips to the guard, and start to fit from the centre top working down each side.

Clips


5mm Body Clip (14)

Insert the body clips into the guard, find the corresponding body holes starting at the top, centre and work down each side to securely lock into place. Then insert the clips into the small rear guard and secure into place.

8mm Chassis Clip (6)

Insert the clips into the guard, lift slightly to find the corresponding chassis hole locking the clip securely into place.

Driver Side (RH)

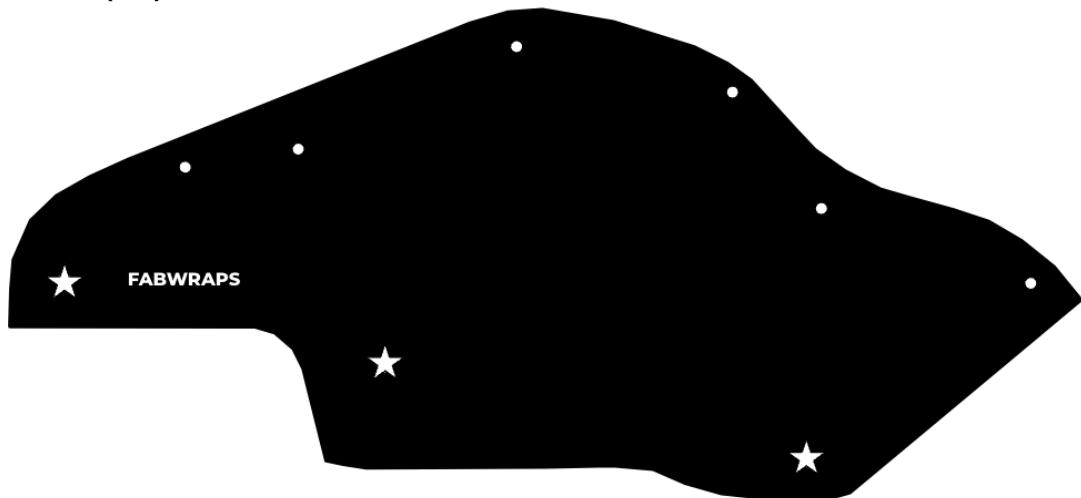

Passenger Side (LH)

