

TOYOTA HILUX N70 (2) Inner Wheel Guards

Installation Instructions

Set of two (2) Neoprene Inner Wheel Guards. Replacements for driver and passenger side, to protect the engine from mud and debris penetrating and damaging the engine. Our guards are made of a premium grade 3mm Reinforced Neoprene Rubber.



Clips

8mm (20) Clips

Insert into the guard and then find the correlating chassis holes, before locking all clips securely into place.

7mm (2) - Shock Covers

Secure through the guard into the shock cover where a ☆ is shown.

Clip Installation

- Pull the 8mm clips apart
- Push back section into the guard where holes align with body/chassis holes
- Fit the guard to the chassis and body
- Push the centre clip into place to secure

Maintenance

The rubber guards are anti-abrasion, tear and crack resistant and grease, fuels, oil and saltwater resistant. For long term protection from natural drying conditions and maintaining the hydrophobic qualities, an application of sealant can be applied.

Remove the existing guards with a clip remover tool or a wide flat screwdriver, if they haven't torn off already, don't worry about saving the old clips as we've provided the new clips. Using the diagram below select the correct guard for the driver/passenger side position, select the appropriate guard in the correct position and use the correct clips provided.

The guards are not designed to fit tightly as the guard is attached to the body on top and the chassis at the bottom, this allows for vehicle movement.


The following diagram indicates the position for each clip type:

8mm (20) ○ 7mm (2) ☆

Driver Side



Passenger Side

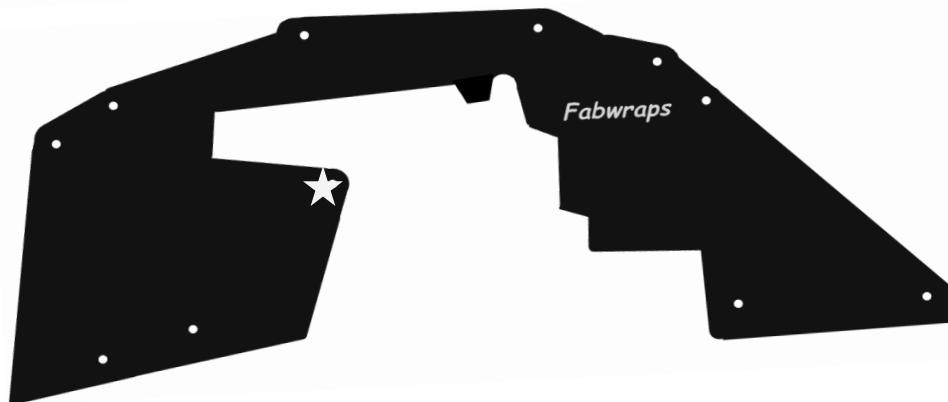

Designed & Made in Australia by Fabwraps