



EIGER 250



QUICK SPECS:

The **EIGER 250** Access Tower gives a work platform for use by up to two persons, with weight evenly distributed across the platforms. Available for both 3T and AGR assembly options, with two width options, the **EIGER 250** is a versatile, **EN1004 compliant** scaffold tower for both internal and external use.

The **EIGER 250** tower is available in two base sizes, 850mm or 1450mm with either a 1.8m or 2.5m platform length, and is supplied with various height frames allowing you the flexibility to build to your specific requirements. The AGR option includes safety guardrails to protect the erector from falls during build and usage, while specifically designed components ensure a sturdy and secure construction.



KEY FEATURES:

- ✓ WORKING HEIGHTS UP TO 14M
- ✓ 3T AND ADVANCED GUARDRAIL OPTIONS
- ✓ SINGLE & DOUBLE WIDTH OPTIONS
- ✓ EASY TO USE & ASSEMBLE
- ✓ LEIGHTWEIGHT & STRONG
- ✓ BRANDED & UPGRADE OPTIONS
- ✓ NO LADDER FRAME REQUIRED
- ✓ EN 1004 CLASS 3 COMPLIANT





+44 (0)1244 833 933



info@popupproducts.co.uk



popupproducts.co.uk

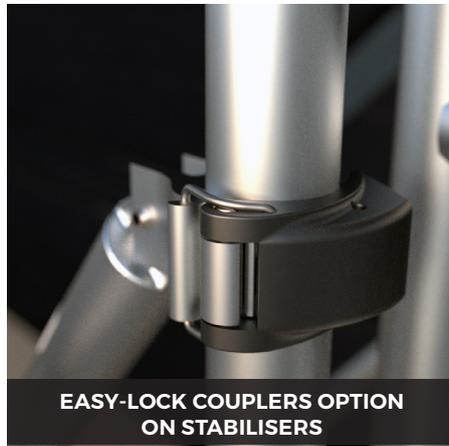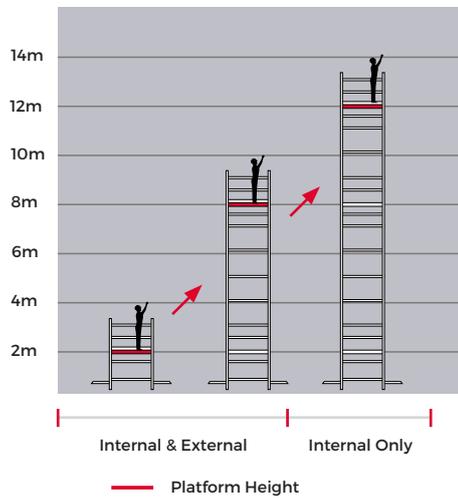

SPECIFICATIONS	OVERALL LENGTH (MM)	OVERALL WIDTH (MM)	PLATFORM DIMENSIONS (MM)	PER PLATFORM (KG)
SINGLE WIDTH OPTION				
1.8M LENGTH OPTION	1,885	930	1,700 x 600	275
2.5M LENGTH OPTION	2,585	930	2,400 x 600	275
DOUBLE WIDTH OPTION				
1.8M LENGTH OPTION	1,885	1,530	1,700 x 600	275
2.5M LENGTH OPTION	2,585	1,530	2,400 x 600	275

