

UW SERIES POCKET HARDMOUNT WASHER-EXTRACTORS

Our robust machines are designed to maximize throughput, minimize costs and deliver the best return on laundry investment.


UW SERIES AT A GLANCE

- 400 G-Force extraction for maximum water removal, allowing your laundry to run at premium efficiency
- OPTIspray™ reduces water use as well as the time necessary to complete the rinse cycle by using a powerful spray rinse to pull wash chemistry through the load and down the drain
- A ten-year warranty protects the bearings, seals, frame, and cylinder shaft assembly from failure or breakage during normal operation due to defects in material or workmanship.

A limited three-year warranty is offered on all other parts.



UNILINC™ TOUCH CONTROL

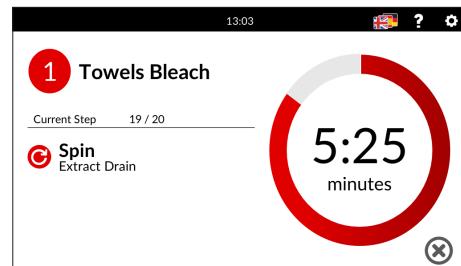

Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Delayed start allows maximum efficiency
- Count-up timer
- Quick diagnostics and machine audit data

M30 CONTROL



Customizable programs give you the flexibility to meet your specific needs, including 30 programmable water levels and 30 programmable cycles designed to reduce your utility costs.

UW SERIES POCKET HARMOUNT WASHER-EXTRACTOR PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		1 UNILINC TOUCH / HIGH-G	2 UNILINC TOUCH / 200-G	3 UNILINC TOUCH / 100-G	4 M30 / 200-G	5 M30 / 100-G
18-Digit SKU		UWTxxxV40Vx060EA00	UWTxxxV40MX060EA00	UWTxxxV40LX060EA00	UWTxxxN20Mx060BA00	UWTxxxN20LX060BA00
FEATURES	100 G-Force	—	—	■	—	■
	200 G-Force	—	■	—	■	—
	High G-Force*	■	—	—	—	—
	Gravity Drain	■	■	■	■	■
	Pump Drain	—	—	—	—	—
	OPTispray	■	■	■	—	—
	Dispenser	□	□	□	—	—
	No Dispenser	■	■	■	■	■
	Ozone Resistant Seals	■	■	■	■	■
	Custom Fire Industry Cycles	■	■	■	—	—
VOLTAGE	(X) 200-240V/50-60Hz/1-3Ph - 2W(L1,L2) or 2W(L1,N) or 3W(L1,L2,L3)**	■	■	■	■	■
	(Q) 200-240V/50-60Hz/3Ph - 3W(L1,L2,L3)**	■	□	—	■	—
	(N) 440-480V/50-60Hz/3Ph - 3W(L1,L2,L3)	□	□	—	□	—
APPEARANCE	Stainless Steel Front & Top Panels	■	■	■	■	■
	Vinyl Side Panels	—	—	—	—	—
	Stainless Steel Side Panels	■	■	■	■	■
	Stainless Steel Door	■	■	■	■	■
HEATING	(0) No Heater/Prep Steam	■	■	■	■	■
	(E) Electric Heat	□	□	—	—	—
WARRANTY	3-Years Limited	■	■	■	■	■
	10-Years Frame and Cylinder Shaft Assembly	■	■	■	■	■
	10-Years Seals & Bearings	■	■	■	■	■

* 400 G-Force available for 45 & 65lb, 300 G-Force available for 85-160lb, and 200 G-Force available for 200lb

** X voltage is standard on 45 & 65lb, Q voltage is standard on 85-200lb

18-DIGIT SKU (FIRST 6 DIGITS)	CAPACITY (LB / KG)	LIST PRICE						
UWT045	45 / 20	\$23,547	—	\$21,370	\$18,712	\$17,719		
UWT065	65 / 30	\$26,489	\$25,795	\$24,799	\$23,298	\$22,240		
UWT085	85 / 38.5	\$39,690	—	—	\$33,809	—		
UWT105	105 / 47.6	\$43,026	—	—	\$36,908	—		
UWT130	130 / 60	\$50,003	—	—	\$43,432	—		
UWT160	160 / 72.6	\$55,563	—	—	—	—		
UWT200	200 / 90.7	—	\$62,811	—	—	—		

MODIFIER OPTIONS

5-CUP DISPENSER	
(3) UNILINC TOUCH	+ \$547

To add a dispenser change
position 8 in SKU to a 3

HEATING	UWT045	UWT065	UWT085	UWT105	UWT130	UWT160	UWT200
(E) Electric Heat*	+ \$1,816	+ \$1,816	+ \$2,945	+ \$3,159	+ \$3,364	+ \$3,580	+ \$3,794

Heat option change position 14 in SKU

*Q & N voltages available for 45-105lb capacities; N voltage available for 130-200lb capacities

VOLTAGE	
(N) 440-480V/50-60Hz/3Ph - 3W(L1,L2,L3)	+ \$915

Voltage option change position 11 in SKU

Please specify any modifier options when ordering.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.

UC SERIES HARDMOUNT WASHER-EXTRACTORS

For on-premises laundries managing lighter daily volumes, but still requiring superior finished quality, UniMac's UC range delivers great results and even better value. Our UC models are built with the same attention to detail as all UniMac machines. That legendary UniMac reliability comes backed by peace of mind from industry-leading warranties.

UC SERIES AT A GLANCE

- Improved cycle times
- Reduced drying time and increased throughput with up to 200 G-Force extraction speed
- Computer-optimized frame design stronger than ever before, with quieter operation
- Stainless-steel top and front panels
- Heavy-duty bearings and seals
- Engineered for quick troubleshooting and ease of service
- Self-cleaning, four-compartment dispenser
- Large, heavy-duty loading door

M9 CONTROL



Offers nine cycles that can be modified to meet your laundry's unique demands. Three water levels and up to five supply signals for automated dispensing of laundry chemicals. Cycle counter and test cycle for self-diagnostics.



UC SERIES HARDMOUNT WASHER-EXTRACTOR PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		1 200-G / GRAVITY	2 100-G / GRAVITY	3 FIRE / 100-G / GRAVITY
18-Digit SKU		UCTxxxQN0VXU80B000	UCTxxxQN0FXU80B000	UCTxxxQN0GXU80B000
FEATURES	100 G-Force	—	■	■
	200 G-Force	■	—	—
	Gravity Drain*	■	■	■
VOLTAGE	(X) 200-240V/50-60Hz/1-3Ph - 2W(L1,L2) or 2W(L1,N) or 3W(L1,L2,L3)	■	■	■
	(B) 120V/60Hz/1Ph (L1, N)	□	□	□
	(N) 440-480V/50-60Hz/3Ph - 3W(L1,L2,L3)	□	□	□
APPEARANCE	Stainless Steel Front & Top Panels	■	■	■
	Vinyl Side Panels**	■	■	■
	Stainless Steel Side Panels**	—	—	—
	Stainless Steel Door	■	■	■
FIRE	Temperature Control Fill	□	□	■
	Custom Fire Industry Cycles***	□	□	■
WARRANTY	3-Years Limited	■	■	■
	5-Years Frame and Cylinder Shaft Assembly	■	■	■
	5-Years Seals & Bearings	■	■	■

* Field conversion kits available for conversion to pump drain system

** Stainless steel side panels are standard on all UCT080 changing position 12 to a number 1 in the SKU

*** Fire cycles available through Field Service as After Market Software update

18-DIGIT SKU (FIRST 6 DIGITS)	CAPACITY (LB / KG)	LIST PRICE		
UCT020	20 / 9.1	\$8,925	\$8,171	—
UCT030	30 / 13.6	\$12,401	\$11,484	\$11,484
UCT040	40 / 18.1	\$16,023	\$14,983	\$14,983
UCT060	60 / 27.2	\$21,566	\$20,368	\$20,368
UCT080	80 / 36.3	\$31,100	\$29,659	\$29,659

MODIFIER OPTIONS

VOLTAGE	B	N
UCT020	+ \$295	+ \$669
UCT030	+ \$334	+ \$669
UCT040	+ \$396	+ \$669
UCT060	—	+ \$858
UCT080	—	+ \$858

Voltage change position 11 in SKU

Please specify any modifier options when ordering.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI - In U.S dollars.

UY SERIES SOFTMOUNT WASHER-EXTRACTORS


Our UY series is built with unyielding construction to ensure industrial strength. Our cutting-edge innovations and technologies reduce costs and maximize throughput. And we're constantly improving. It's all part of our commitment to providing the lowest cost of ownership in the industry.

UY SERIES AT A GLANCE

- Sleek, modern design with a slanted control panel
- 13 chemical ports of various sizes, including 1/2" manifold flush connections
- Unique drum increases mechanical action for better washing results and optimized water extraction
- Large drain valve for increased throughput
- Large door opening for easy loading and unloading
- Easy control access – no need to remove top panel
- Durable micro-v belt for long life



UNILINC™ TOUCH CONTROL

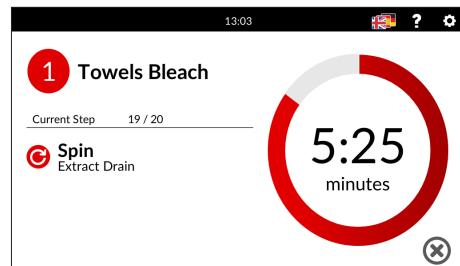

Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Delayed start allows maximum efficiency
- Count-up timer
- Quick diagnostics and machine audit data

UY SERIES SOFTMOUNT WASHER-EXTRACTORS

■ STANDARD — NOT AVAILABLE

SKU	UYT020	UYT025	UYT030	UYT040	UYT055	UYT070
CAPACITY (LB / KG)	20 / 9	25 / 11	30 / 14	40 / 18	55 / 25	70 / 32
18-Digit SKU	UYT020VN0HXUB0C0BA	UYT025VN0HXUB0C0BA	UYT030VN0HXUB0C0BA	UYT040VN0HXUBPE0BA	UYT055VN0HXUBPE0BA	UYT070VN0HXUBPE0BA
List Price	\$9,117	\$10,091	\$13,345	\$17,020	\$18,460	\$21,538
FEATURES	400 G-Force	■	■	■	■	—
	350 G-Force	—	—	—	—	■
	Stainless Steel Front, Top & Side Panels	■	■	■	■	■
	8 Chemical Signals	■	■	■	■	■
	4 Compartment Soap Box	■	■	■	■	■
	UL Approvals	■	■	■	■	■
	Water Re-Use Capable	■	■	■	■	■
	Automatic Door Unlock Module	■	■	■	■	■
	Ozone Resistant Seals	■	■	■	■	■
	Fast Fill Valves	—	—	—	■	■
VOLTAGE	(X) 200-240V/50-60Hz/1ph	■	■	■	■	■
	(N) 440-480V/50-60Hz/3Ph ¹	+\$752	+\$204	+\$254	+\$331	+\$340
HEATING	(0) No Heater	■	■	■	—	—
	(P) No Heater/Prep Steam	—	—	—	■	■
	(D) Direct Steam Heating ²	+\$585	+\$617	+\$773	+\$695	+\$714
WARRANTY	3-Years Limited	■	■	■	■	■
	5-Years Frame and Cylinder Shaft Assembly	■	■	■	■	■
	5-Years Seals & Bearings	■	■	■	■	■

MODIFIER OPTIONS

¹Voltage change position 11 in SKU to (N)

²Heating change position 14 in SKU to (D)

Please specify when ordering: SKU, Electric Specifications (Voltage, Cycle, Hertz), Options

Additional options, check with order desk for lead time.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.

UY SERIES SOFTMOUNT WASHER-EXTRACTORS

Our UY series is built with unyielding construction to ensure industrial strength. Our cutting-edge innovations and technologies reduce costs and maximize throughput. And we're constantly improving. It's all part of our commitment to providing the lowest cost of ownership in the industry.

UY SERIES AT A GLANCE

- Sleek, modern design
- 13 chemical ports of various sizes, including 1/2" manifold flush connections
- Unique drum increases mechanical action for better washing results and optimized water extraction
- Large drain valve for increased throughput
- Large door opening for easy loading and unloading
- Durable micro-v belt for long life

UNILINC™ TOUCH CONTROL



Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Delayed start allows maximum efficiency
- Count-up timer
- Quick diagnostics and machine audit data



UY SERIES SOFTMOUNT WASHER-EXTRACTORS

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SKU	UYT100	UYT135	UYT180	UYT230	UYT275
CAPACITY (LB / KG)	100 / 45	135 / 61	180 / 82	230 / 104	275 / 125
18-Digit SKU	UYT100V0BNQU2PR0AA	UYT135V0BNQU2PR0AA	UYT180V0BNMU2PT0EE	UYT230V0BNMU2PT0EE	UYT275V0BNMU2PT0EE
List Price	\$40,158	\$54,689	\$82,455	\$89,451	\$96,445
FEATURES	350 G-Force	■	■	■	■
	Stainless Steel Front, Top & Side Panels	■	■	■	■
	8 Chemical Signals	■	■	■	■
	5 Compartment Soap Box	■	■	■	■
	UL Approvals	■	■	■	■
	Water Re-Use Capable	■	■	■	■
	3rd Water Inlet	■	■	■	■
	3 Air-Operated Water Inlets	—	—	■	■
	Dual Drain	■	■	■	■
	Ozone Resistant Seals	■	■	■	■
VOLTAGE	(Q) 200-240V/50-60Hz/3Ph	■	■	—	—
	(P) 380-415V/50-60Hz/3Ph	□	□	—	—
	(N) 440-480V/50-60Hz/3Ph	□	□	—	—
	(M) 208-240V/60Hz/3Ph	—	—	■	■
	(4) 400-480V/60Hz/3Ph ¹	—	—	+ \$527	+ \$527
HEATING	(P) No Heater/Prep Steam	■	■	■	■
	(D) Direct Steam Heating ²	—	—	+ \$2,043	+ \$2,263
OPTIONS	(F) Forward Tilting System ³	—	—	+ \$6,471	+ \$7,588
	(W) No Soap Box ⁴	—	—	(\$630)	(\$630)
	(N) Water Tap ⁵	—	—	+ \$416	+ \$416
WARRANTY	3-Years Limited	■	■	■	■
	5-Years Frame and Cylinder Shaft Assembly	■	■	■	■
	5-Years Seals & Bearings	■	■	■	■

MODIFIER OPTIONS

¹Voltage change position 11 in SKU to (4)

²Heating change position 14 in SKU to (D)

³Forward Tilting change position 10 in SKU to (F)

⁴No Soap Box change position 12 in SKU to (W)

⁵Water Tap change position 18 in SKU to (N)

Additional options, check with order desk for lead time.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.

Please specify when ordering: SKU, Electric Specifications (Voltage, Cycle, Hertz), Options

UT SERIES SINGLE 75 LB TUMBLE DRYERS


Our UT series are in a league of their own in terms of performance and efficiency. These durable commercial laundry machines achieve the perfect balance between drying temperature, airflow pattern and usable cylinder space for optimal drying results while significantly reducing utility and labor costs.

UT SERIES AT A GLANCE

- OPTidry™ Over-Dry Prevention Technology
- High-grade, heavy-duty steel door and two-point hinges
- Galvanized, pre-coated steel cylinder
- Electrostatically applied paint, available in white or gray
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket



UNILINC™ TOUCH CONTROL

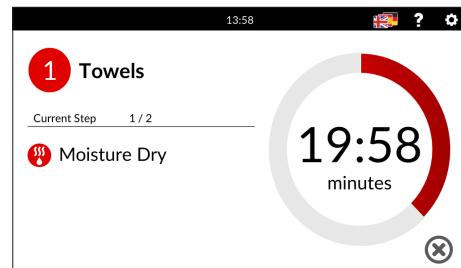

Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Count-up timer
- Quick diagnostics and machine audit data

PROCAPTURE™ BY UNIMAC®

Through an industry-first patented process, ProCapture by UniMac captures 98 percent of tumble dryer lint. This breakthrough technology produces a number of benefits including real dollars in savings.

UT SERIES SINGLE 75 LB TUMBLE DRYER PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		1 UNILINC TOUCH / OPTIDRY / REV / WHITE	2 UNILINC TOUCH / OPTIDRY / CARE / REV / WHITE	3 UNILINC TOUCH / OPTIDRY / NON-REV / WHITE
18-Digit SKU		UTxxxNVN0RXA6W0000	UTxxxNVN0RC6W0000	UTxxxNVN0NXA6W0000
FEATURES	Reversing Cylinder	■	■	—
	Non-Reversing Cylinder	—	—	■
	CARE Fire Suppression	—	■	—
	Moisture Sensing	■	■	■
	(N) Natural Gas Heating	■	■	■
	(L) Liquid Propane Heating	□	□	□
	(E) Electric Heating	□	—	□
	(S) Steam Heating	□	□	□
	Voltage Options (see chart below)	□	□	□
APPEARANCE	(C) ProCapture*	□	□	□
	White Front & Side Panels	■	■	■
	Gray Front & Side Panels	□	—	□
	Stainless Steel Door	■	■	■
WARRANTY	Galvanized Cylinder	■	■	■
	3-Years Limited	■	■	■
	5-Years Limited	—	—	—

*ProCapture available for UT075 only

18-DIGIT SKU (FIRST 5 DIGITS)	CAPACITY (LB / KG)	LIST PRICE		
UT075	75 / 34	\$10,513	\$11,284	\$8,979
UTF75	75 / 34	\$10,841	\$11,612	—

MODIFIER OPTIONS

		UT075	UTF75	COLOR
VOLTAGE	GAS/STEAM	(B) 100-120V/50-60Hz/1Ph	□	—
		(X) 200-240V/50-60Hz/1-3Ph	■	—
	ELECTRIC	(N) 440-480V/50-60Hz/3Ph	□	□
		(Q) 200-240V/50-60Hz/3Ph	□	■
HEATING	GAS/STEAM	(G) 230-240V/50-60Hz/3Ph	□	—
		(L) 460-480V/50-60Hz/3Ph	+ \$381	—
	ELECTRIC	(L) Liquid Propane	□	□
		(E) Electric	+ \$1,241	—
	STEAM	(S) Steam	+ \$1,957	—

Voltage change position 11 in SKU, Heating change position 6 in SKU

COLOR

(S) Gray □

Color option change position 14 in SKU
Only available for package 1 and 3

PROCAPTURE

(C) ProCapture (75 lb) + \$2,874

ProCapture option change position 16 in SKU
Only available with N heating and Q or X voltage on 75 lb

*Results derived from internal lab testing environment produced up to 98% lint capture efficiency with bath towel loads dried at 185 degrees Fahrenheit. No independent lab testing was conducted. These results represent findings from controlled laboratory conditions and may not accurately simulate real-world usage of the product as effectiveness can vary widely depending on factors such as method of use, load type, environment, individual user characteristics, and other circumstances.

Please specify any modifier options when ordering.
Prices subject to change without notice.
All prices are in F.O.B. Ripon, WI – In U.S dollars.

UT SERIES SINGLE 75 LB TUMBLE DRYERS

In a busy on-premises laundry environment, speed and efficiency are non-negotiable and durability is a must. Our classic tumble dryers deliver exceptional performance and legendary UniMac® durability for operations that don't require advanced control platforms and networking. Intuitive, basic control options ensure flexibility to deliver quality results every cycle.

UT SERIES AT A GLANCE

- High-grade, heavy-duty steel door and two-point hinges
- Galvanized, pre-coated steel cylinder
- Electrostatically applied paint
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket



M SERIES CONTROL



Our programmable control allows any combination of up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.

DUAL DIGITAL CONTROL



This economy control allows for the operator to select the ideal temperature, heating time and cooling time for each use.

PROCAPTURE™ BY UNIMAC®

Through an industry-first patented process, ProCapture by UniMac captures 98 percent of tumble dryer lint. This breakthrough technology produces a number of benefits including real dollars in savings.

UT SERIES SINGLE 75 LB TUMBLE DRYER PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		4 M SERIES / REV / WHITE	5 M SERIES / NON-REV / WHITE	6 DUAL DIGITAL / REV / WHITE	7 DUAL DIGITAL / NON-REV / WHITE
18-Digit SKU		UTxxxNNN0RXG6W0000	UTxxxNNN0NXG6W0000	UTxxxNFn0RXG6W0000	UTxxxNFn0NXG6W0000
FEATURES	Reversing Cylinder	■	—	■	—
	Non-Reversing Cylinder	—	■	—	■
	CARE Fire Suppression	—	—	—	—
	Moisture Sensing	—	—	—	—
	(N) Natural Gas Heating	■	■	■	■
	(L) Liquid Propane Heating	□	□	□	□
	(E) Electric Heating	□	□	□	□
	(S) Steam Heating	□	□	□	□
	Voltage Options (see chart below)	□	□	□	□
APPEARANCE	(C) ProCapture*	□	□	—	—
	White Front & Side Panels	■	■	■	■
	Gray Front & Side Panels	—	—	—	—
	Stainless Steel Door	■	■	■	■
	Stainless Steel Cylinder	—	—	—	—
WARRANTY	Galvanized Cylinder	■	■	■	■
	3-Years Limited	■	■	■	■
	5-Years Limited	—	—	—	—

*ProCapture available for UT075 only

18-DIGIT SKU (FIRST 5 DIGITS)	CAPACITY (LB / KG)	LIST PRICE		
UT075	75 / 34	\$9,927	\$8,393	\$9,342

MODIFIER OPTIONS

		UT075	PROCAPTURE
VOLTAGE	(B) 100-120V/50-60Hz/1Ph	□	(C) ProCapture (75 lb) + \$2,874
	(X) 200-240V/50-60Hz/1-3Ph	■	
	(N) 440-480V/50-60Hz/3Ph	□	
	(Q) 200-240V/50-60Hz/3Ph	□	
GAS/STEAM	(G) 230-240V/50-60Hz/3Ph	□	ProCapture option change position 16 in SKU Only available with N heating and Q or X voltage on 75 lb
	(L) 460-480V/50-60Hz/3Ph	+ \$381	
HEATING	(L) Liquid Propane	□	
	(E) Electric	+ \$1,241	
	(S) Steam	+ \$1,957	

Voltage change position 11 in SKU, Heating change position 6 in SKU

*Results derived from internal lab testing environment produced up to 98% lint capture efficiency with bath towel loads dried at 185 degrees Fahrenheit. No independent lab testing was conducted. These results represent findings from controlled laboratory conditions and may not accurately simulate real-world usage of the product as effectiveness can vary widely depending on factors such as method of use, load type, environment, individual user characteristics, and other circumstances.

Please specify any modifier options when ordering.
Prices subject to change without notice.
All prices are in F.O.B. Ripon, WI – In U.S dollars.

UT SERIES SINGLE 120, 170, 200 LB TUMBLE DRYERS


Our UT series are in a league of their own in terms of performance and efficiency. These durable commercial laundry machines achieve the perfect balance between drying temperature, airflow pattern and usable cylinder space for optimal drying results while significantly reducing utility and labor costs.

UT SERIES AT A GLANCE

- OPTidry™ Over-Dry Prevention Technology
- High-grade, heavy-duty steel door and two-point hinges
- Galvanized, pre-coated steel cylinder
- Electrostatically applied paint, available in white or gray
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket



UNILINC™ TOUCH CONTROL

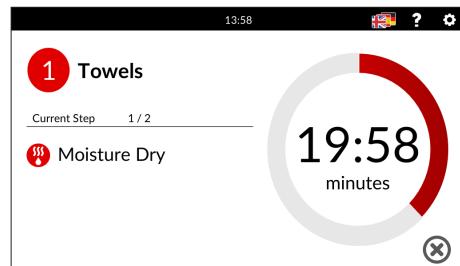

Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Count-up timer
- Quick diagnostics and machine audit data

M SERIES CONTROL



Our programmable control allows any combination of up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.

UT SERIES SINGLE 120, 170, 200 LB TUMBLE DRYER PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		1 UNILINC TOUCH / OPTIDRY / REV / WHITE	2 UNILINC TOUCH / OPTIDRY / CARE / REV / WHITE	3 M SERIES / REV / WHITE	4 M SERIES / OPTIDRY / REV / WHITE	5 M SERIES / CARE / REV / WHITE
18-Digit SKU	UTxxxNVN0RQA6W0000	UTxxxNVN0RQC6W0000	UTxxxNNN0RQG6W0000	UTxxxNNN0RQA6W0000	UTxxxNNN0RQK6W0000	UTxxxNNN0RQK6W0000
FEATURES	Reversing Cylinder	■	■	■	■	■
	Non-Reversing Cylinder	—	—	—	—	—
	CARE Fire Suppression	—	■	—	—	■
	Moisture Sensing	■	■	—	■	—
	(N) Natural Gas Heating	■	■	■	■	■
	(L) Liquid Propane Heating	□	□	□	□	□
	(E) Electric Heating	□	—	□	□	—
	(S) Steam Heating	□	□	□	□	□
	Voltage Options (see chart below)	□	□	□	□	□
APPEARANCE	White Front & Side Panels	■	■	■	■	■
	Gray Front & Side Panels	□	—	—	—	—
	Stainless Steel Door	■	■	■	■	■
	Stainless Steel Cylinder	—	—	—	—	—
	Galvanized Cylinder	■	■	■	■	■
WARRANTY	3-Years Limited	■	■	■	■	■
	5-Years Limited	—	—	—	—	—

18-DIGIT SKU (FIRST 5 DIGITS)	CAPACITY (LB / KG)	LIST PRICE				
UT120	120 / 55	\$18,214	\$19,060	\$17,607	\$18,394	\$18,453
UT170	170 / 77	\$25,211	\$26,057	\$24,670	\$25,457	\$25,516
UT200	200 / 90	\$35,754	\$36,600	\$35,317	\$36,104	\$36,163

MODIFIER OPTIONS

		UT120	UT170	UT200	COLOR	
VOLTAGE	GAS/STEAM	(N) 440-480V/50-60Hz/3Ph	□	□	□	□
		(Q) 200-240V/50-60Hz/3Ph	■	■	■	□
	ELECTRIC	(G) 230-240V/50-60Hz/3Ph	□	—	—	Color option change position 14 in SKU Only available for packages 1
		(L) 460-480V/50-60Hz/3Ph	□	—	—	
HEATING	(L) Liquid Propane	□	□	□		
	(E) Electric	+ \$5,426	—	—		
	(S) Steam	+ \$3,072	+ \$6,170	+ \$6,585		

Voltage change position 11 in SKU, Heating change position 6 in SKU

Please specify any modifier options when ordering.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.


SINGLE 30, 55 LB AND STACKED 30, 45, 55 LB TUMBLE DRYERS

Our UT series are in a league of their own in terms of performance and efficiency. These durable commercial laundry machines achieve the perfect balance between drying temperature, airflow pattern and usable cylinder space for optimal drying results while significantly reducing utility and labor costs.

UT SERIES AT A GLANCE

- OPTidry™ Over-Dry Prevention Technology
- High-grade, heavy-duty steel door and two-point hinges
- Galvanized, pre-coated steel cylinder
- Electrostatically applied paint
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket

UNILINC™ TOUCH CONTROL

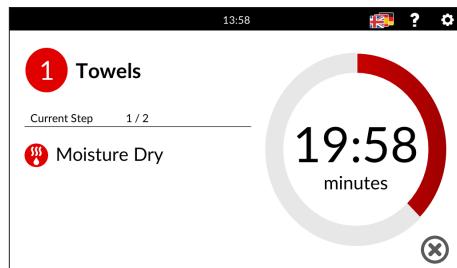

Ease of use drives the ultimate user experience with the UniLinc™ Touch control. UniMac's premium control brings simplicity, flexibility and intelligence to every laundry room.

- Bright, capacitive touch screen
- 34 language options
- Seamless user experience
- Staff training is quick and simple
- Count-up timer
- Quick diagnostics and machine audit data

M SERIES CONTROL

Our programmable control allows any combination of up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.



PROCAPTURE™ BY UNIMAC®

Through an industry-first patented process, ProCapture by UniMac captures 98 percent of tumble dryer lint. This breakthrough technology produces a number of benefits including real dollars in savings.



SINGLE 30, 55 LB AND STACKED 30, 45, 55 LB TUMBLE DRYER PACKAGES

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		1 UNILING TOUCH / OPTIDRY / REV / WHITE	2 M SERIES / REV / WHITE	3 M SERIES / OPTIDRY / REV / WHITE	4 M-SERIES / OPTIDRY / CARE / REV / WHITE	5 DUAL DIGITAL / REV / WHITE
18-Digit SKU		UTxxxNVN0RXA6W0000	UTxxxNNN0RXG6W0000	UTxxxNNN0RXA6W0000	UT055NNN0RXC6W0000	UTxxxNFn0RXG6W0000
FEATURES	Reversing Cylinder	■	■	■	■	■
	Non-Reversing Cylinder	—	—	—	—	—
	CARE Fire Suppression	—	—	—	■	—
	Moisture Sensing	■	—	■	■	—
	(N) Natural Gas Heating	■	■	■	■	■
	(L) Liquid Propane Heating	—	—	—	—	—
	(E) Electric Heating	□	□	□	—	□
	(S) Steam Heating (UT055 Only)	□	□	□	□	□
	Voltage Options (see chart below)	□	□	□	□	□
	(C) ProCapture*	□	□	□	—	—
APPEARANCE	White Front & Side Panels	■	■	■	■	■
	Gray Front & Side Panels	—	—	—	—	—
	Stainless Steel Door	■	■	■	■	■
	Stainless Steel Cylinder	—	—	—	—	—
	Galvanized Cylinder	■	■	■	■	■
WARRANTY	3-Years Limited	■	■	■	■	■
	5-Years Limited	—	—	—	—	—

*ProCapture available for UTS30 and UTT30 only

18-DIGIT SKU (FIRST 5 DIGITS)	CAPACITY (LB / KG)	LIST PRICE				
UTS30	30 / 14	\$7,712	\$7,026	\$7,587	—	\$6,529
UT055	55 / 24	\$8,735	\$8,045	\$8,658	\$9,429	\$7,531
UTT30	30 / 13	\$15,899	\$14,512	—	—	\$13,246
UTT45	45 / 20	\$18,634	\$17,273	—	—	\$15,927
UTT55	55 / 24	\$20,685	\$19,173	—	—	\$17,679

MODIFIER OPTIONS

	UTS30	UT055	UTT30	UTT45	UTT55
VOLTAGE	(B) 100-120V/50-60Hz/1Ph	□	□	□	—
	(X) 200-240V/50-60Hz/1-3Ph	■	■	■	■
	(N) 440-480V/50-60Hz/3Ph	□	□	□	□
	(G) 230-240V/50-60Hz/3Ph	□	□	□	—
	(L) 460-480V/50-60Hz/3Ph	+ \$201	+ \$381	+ \$400	—
HEATING	(L) Liquid Propane*	—	—	—	—
	(E) Electric	+ \$540	+ \$601	+ \$1,027	—
	(S) Steam	—	+ \$1,729	—	—

Voltage change position 11 in SKU, Heating change position 6 in SKU

* Field conversion kits available for LP gas.

*Results derived from internal lab testing environment produced up to 98% lint capture efficiency with bath towel loads dried at 185 degrees Fahrenheit. No independent lab testing was conducted. These results represent findings from controlled laboratory conditions and may not accurately simulate real-world usage of the product as effectiveness can vary widely depending on factors such as method of use, load type, environment, individual user characteristics, and other circumstances.

PROCAPTURE	
(C) ProCapture (S30)	+ \$1,437
(C) ProCapture (T30)	+ \$2,874

ProCapture option change position 16 in SKU S30 available in N heating and B or X voltage. T30 available with N heating and B or X voltage.

Please specify any modifier options when ordering.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.


STACKED WASHER-EXTRACTOR/ TUMBLE DRYER

UniMac's stacked washer-extractor/tumble dryer is a unique commercial-grade product that washes and dries in a small footprint.

- Ideal for small OPL settings with limited space
- Increases wash capacity
- Improves throughput
- Minimal front fasteners give quick access to key washer-extractor components to improve serviceability
- Supports a higher volume that typical retail and light commercial products are able to support
- Reliability and durability than drastically outperforms retail or light commercial options



OPL TOUCH CONTROL



The UniMac OPL Touch control has clear, easy to use, easy to understand directions and simple cycle programming

- User-friendly screen with operating instructions built in as part of the control
- Easy-to-understand
- 30+ languages available
- On-screen timer

STACKED WASHER-EXTRACTOR/ TUMBLE DRYER

■ STANDARD □ AVAILABLE — NOT AVAILABLE

SOLUTIONS		UST30 NATURAL GAS / GRAVITY	UST50 NATURAL GAS / GRAVITY
Capacity (lb / kg)		2 x 30 / 13	2 x 50 / 23
18-Digit SKU		UST030NVN0XS4YE000	UST050NVN0XS4YE000
List Price		\$18,163	\$27,442
FEATURES	200 G-Force	■	■
	Gravity Drain	■	■
	Pump Drain	—	—
	Reversing Cylinder	■	■
VOLTAGE	(X) 200-240V/50-60Hz/1-3Ph	■	■
APPEARANCE	Chrome Doors	■	■
	Stainless Steel Front Panels	■	■
	Painted Side Panels	■	■
	Stainless Steel Cylinder	■	■
	8 Signal Soap Board	■	■
	Manual Soap Dispenser	■	■
	US Threads	■	■
WARRANTY	3-Years Limited	■	■
	5-Years Limited	—	—

Prices subject to change without notice.
All prices are in F.O.B. Ripon, WI – In U.S dollars.

FIREFIGHTER'S PPE DRYING CABINET

The Firefighter's Personal Protective Equipment (PPE) Drying Cabinet provides fire stations the means to effectively, efficiently and safely dry protective gear – at the lowest cost of ownership in the industry.

PPE DRYING CABINET AT A GLANCE

- Five standard cycles
- Doors open at complete 180° angle
- Adjustable leveling legs
- Space for up to 15 boots/gloves
- Unique rack design for maximum water removal
- Electrostatically-applied paint for superior bonding and corrosion resistance
- 100% front-serviceable
- Optional utility shelf
- Contributes to compliance with NFPA 1851 guidelines

M SERIES CONTROL



The M Series Control is designed to manage the drying and cooling cycles of the gear cabinet. The controller is programmed to meet NFPA standards with the flexibility for the operator to adjust the time settings.



FIREFIGHTER'S PPE DRYING CABINET

■ STANDARD — NOT AVAILABLE

SKU	UTGC6ENG4402W01	UTGC6ENG4502W01	UTGC6ENG6402W01	UTGC6ENG6502W01
CAPACITY (LB / KG)	6 FULL SETS OF TURNOUT GEAR			
List Price	\$12,327	\$12,327	\$12,327	\$12,327
FEATURES	H7S Control	■	■	■
	Glove/Boot Rack Included*	■	■	■
VOLTAGE	208V/50-60Hz/1Ph	■	—	—
	208V/50-60Hz/3Ph	—	■	—
	240V/50-60Hz/1Ph	—	—	■
	240V/50-60Hz/3Ph	—	—	■
OPTION	FR250 Single Utility Shelf**	Must be ordered through Alliance Laundry Systems Genuine Parts. Refer to MyAlliance for current pricing and availability.		

* Holds up to 15 gloves or boots

** Used for drying hoses, etc.

Prices subject to change without notice.

All prices are in F.O.B. Ripon, WI – In U.S dollars.

EXTENDED WARRANTY PROGRAM – 4TH AND 5TH YEAR COVERAGE – PARTS ONLY

MATERIAL CODE	DESCRIPTION	SUGGESTED LIST PRICE (US\$)
WRNTY-UW-PHZ	45-130 lb Pocket Hardmount Washer-Extractor	\$875
WRNTY-UW-PHL	160-200 lb Pocket Hardmount Washer-Extractor	\$1,912
WRNTY-TUMB 050-075	75 lb Single Pocket Tumble Dryer	\$537
WRNTY-TUMB 120-200	120-200 lb Single Pocket Tumble Dryer	\$952

Proper program enrollment forms must be submitted to Alliance Laundry Systems no later than 60 days after installation.

For additional options, please consult facatory
Prices subject to change without notice.
All prices are in F.O.B. Ripon, WI – In U.S dollars.