

ASTM F 718

SHIPBUILDERS AND MARINE PAINTS AND COATINGS PRODUCT/PROCEDURE DATA SHEET

I. GENERIC TYPE AND DESCRIPTION: BIO-DEK™ Grout Selaer	Date: 08/26/2020
Specification Number: MIL-PRF-32584	
NOTE: For Type/Grade/Class/Application information see QPD-Type V, Class 1&2, Grade A, Composition E	
II. MANUFACTURERS DATA:	
(a) MANUFACTURER: BIO-DEK™ LLC, 2827 Andrew Ave., Pascagoula, MS 39567	
(b) PRODUCT DESIGNATION: BIO-DEK™ Grout Selaer	
(c) COLOR(S): colorless	
(d) USES: Coating designed to fill small pores or holes in decking material	
(e) TECHNICAL SERVICE REPRESENTATIVE: Murray DuBourdieu 714 975-0898	
III. PROPERTIES:	
(a) PERCENT VOLUME SOLIDS (ASTM D2697): 100 %	
(b) PERCENT WEIGHT SOLIDS (ASTM D2369): 100 %	
(c) FLASH POINT (Click here to enter text):	
Part A (Resin): >302 °F (>150 °C)	
Part B (Hardener): >302 °F (150 °C)	
(d) WEIGHT PER VOLUME (ASTM D1475):	
Part A (Resin) 7.5 lb/gal (898 g/L)	
Part B (Hardener) 9.2 lb/gal (1102 g/L)	
(e) PERCENT EDGE RETENTION, IF REQUIRED BY APPLICABLE SPECIFICATION (N/A): Click here to enter text %	
(f) SHELF LIFE: 24 Months	
(g) VISCOSITY (Click here to enter text):	
Part A (Resin) : 6,500 cp @ 70 °C (21 °F)	
Part B (Hardener) : 250 cp @ 70 °C (21 °F)	
(h) PACKAGING: resin in gallon can, hardener in quart can, 2 full kits provided in a box	
(i) NUMBER OF COMPONENTS: 2	
(j) GLOSS (ASTM D523): 60-80 @ 60degrees GU	
(k) STORAGE REQUIREMENTS: TEMPERATURE: 50 °F (10 °C) MIN. 90 °F (32 °C) MAX.	
ADDITIONAL PAINT STORAGE REQUIREMENTS: do not open prior to use	
(l) VOLATILE ORGANIC COMPOUNDS (VOCS- EPA TEST METHOD 24): <.04 lb/gal (<5 g/L)	
(m) WEIGHT PER AREA OF DRY FILM AT 1 MIL THICKNESS: .0050 lb/sq. ft. (24.41 g/m²)	
(n) SPECIAL PROPERTIES: Click here to enter text	

IV. SURFACE PREPARATION MINIMUM REQUIREMENTS:

- (a) INITIAL CLEANLINESS: clean, dry and free of loose particulate.
- (b) TOUCH-UP CLEANLINESS: same as initial
- (c) PROFILE (1): 1 mils MIN. 50 mils MAX.
- (d) SPECIAL INSTRUCTIONS: temperature will effect the working time and dry to full cure
- (e) PRIMER REQUIREMENTS: n/a
- (f) MAXIMUM ALLOWABLE CONDUCTIVITY ([Click here to enter text](#)):
 Refer to NAVSEA Standard item 009-32
- (g) MAXIMUM DEGREE OF FLASH RUSTING ALLOWED: n/a

SPECIAL SAFETY PRECAUTIONS:
 refer to MSDS

V. MIXING PROCEDURES

- (a) MIXING RATIOS BY WEIGHT: 2.3:1 resin:hardner
 BY VOLUME: 2.6:1 resin:hardner
- (b) INDUCTION TIME: N/A Minutes
- (c) RECOMMENDED CLEANING SOLVENT (NO THINNING ALLOWED): alcohol, acetone, xylene
- (d) POT LIFE:[Click here to enter text](#)
 .67 Hours @ 70 °F (21 °C)
 Graphs included on page: 4
- (e) SPECIAL INSTRUCTIONS: [Click here to enter text](#)

VI. APPLICATION:

- (a) ENVIRONMENTAL LIMITATIONS:
 SUBSTRATE TEMPERATURE: 50°F (10°C) MIN. 90°F (32°C) MAX.
 AMBIENT TEMPERATURE: 50°F (10°C) MIN. 90°F (32°C) MAX.
 DIFFERENCE ABOVE THE DEW POINT: 5 °F (3 °C)
 MAXIMUM PERCENT RELATIVE HUMIDITY: 90 %
- (b) FILM THICKNESS (SSPC PA2-73T): PER COAT:
 4 mils WET MIN. 100 mils WET MAX.
 4 mils DRY MIN. 100 mils DRY MAX.
 TOTAL SYSTEM:
 4 mils DRY MIN. 100 mils DRY MAX.

(c) DRY TIMES (ASTM D1640):

Minimum Overcoat Window:

4 Hours @ 90 °F (32°C)
6 Hours @ 80 °F (27°C)
8 Hours @ 70 °F (21°C)

Maximum Overcoat Window:

24 Hours @ 90 °F (32°C)
36 Hours @ 80 °F (27°C)
48 Hours @ 70 °F (21°C)

Dry to Handle:

4 Hours @ 90 °F (32°C)
6 Hours @ 80 °F (27°C)
8 Hours @ 70 °F (21°C)

Dry to Service:

2 Days @ 90 °F (32°C)
3 Days @ 80 °F (27°C)
4 Days @ 70 °F (21°C)

Graphs included on page [Click here to enter text](#) or additional information included on page [Click here to enter text](#)




(d) EQUIPMENT REQUIREMENTS: small jiffy blade for mixing and low speed drill, ¼" nap roller, brush or squeegee for application

(e) SPECIAL INSTRUCTIONS: [Click here to enter text](#)

IF OVERCOAT WINDOW HAS BEEN EXCEEDED FOR CRITICAL APPLICATIONS: If critical window has been exceeded, surface should be sanded to a 1-3 mil profile before applying next step

IF OVERCOAT WINDOW HAS BEEN EXCEEDED FOR NON-CRITICAL APPLICATIONS: If critical window has been exceeded, surface should be sanded to a 1-3 mil profile before applying next step

GRAPHS FOR POT LIFE AND CURE TIMES:

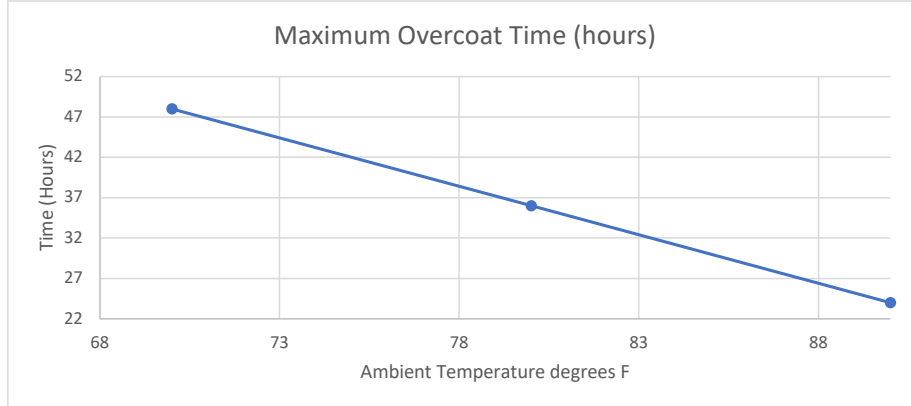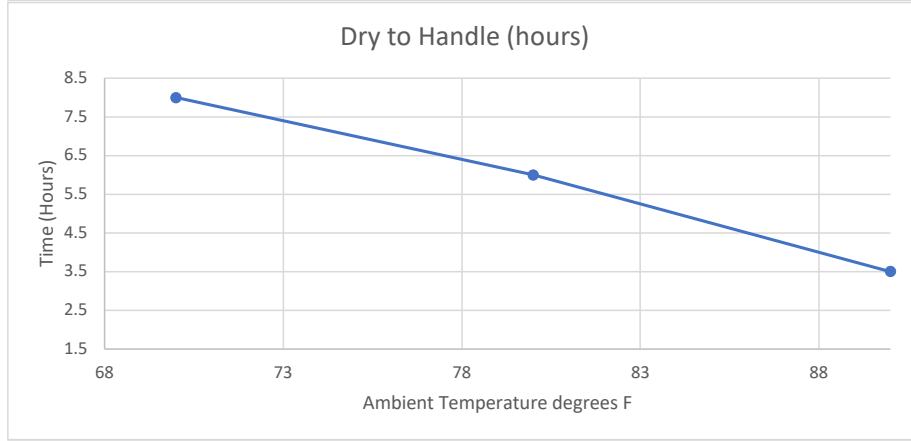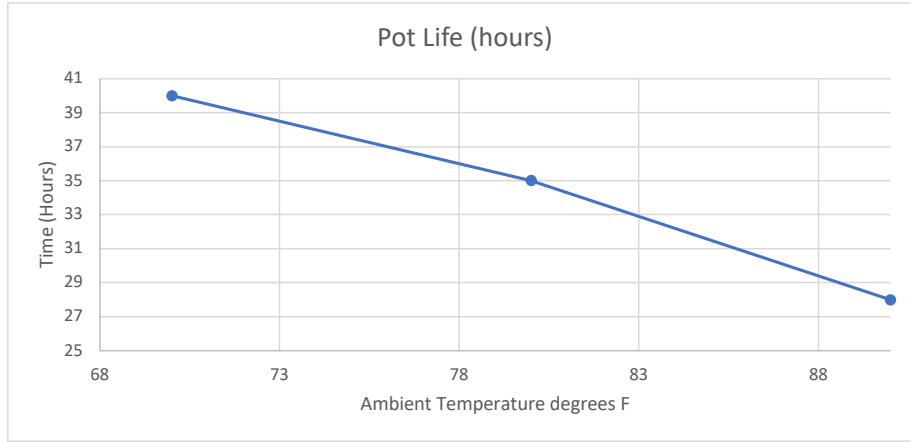

ADDITIONAL DATA/INSTRUCTIONS:

I. GENERIC TYPE AND DESCRIPTION: 100% solids, low odor clear epoxy material designed to seal porous surface and provide a suitable surface for decorative or protective coating

II. MANUFACTURERS DATA: [Click here to enter text](#)

III. PROPERTIES: [Click here to enter text](#)

IV. SURFACE PREPARATION MINIMUM REQUIREMENTS: 1-3 mil. Minimum surface profile. Surface must be clean, dry and free from flaking particulate

V. MIXING PROCEDURES: mix part A resin with Jiffy blade on low speed for 30-60 seconds then blend in part B and mix until homogeneous (1-2 minutes)

VI. APPLICATION: apply by brush or roller or squeegee