

The logo for Votatec, featuring the word "Votatec" in a bold, sans-serif font. The letter "V" is stylized with a diagonal slash through it. The text is orange with a black outline.

**Innovation & Quality**

Dist: Led Lighting Solutions Canada  
514-951-7654 / 1-855-951-7654



**Lamp Catalog**



- Power: 3.8W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 300 Lm
- CCT: 2700K/3000K/4000K/5000K
- Beam Angle: 360°
- Base: E12 ( Anti-Shock )
- Dimension: 3-7/8" \* 1-3/8"

**Candle Filament**


**VO-FCAW3.8-120**



- Power: 5.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 500 Lm
- CCT: 2700K/3000K/4000K/5000K
- Beam Angle: 360°
- Base: E12 ( Anti-Shock )
- Dimension: 3-7/8" \* 1-3/8"

**Candle Filament**

**VO-FCAW5.5-120**

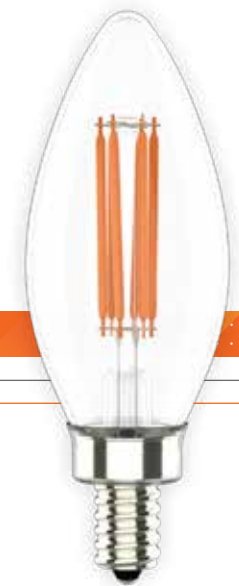

- Power: 5W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 500 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E26
- Dimension: 5" \* 1-1/4"

**T10 Filament**

**VO-FT10W5-26**



- Power: 4W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 400 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E12 ( Anti Shock )
- Dimension: 3-1/2" \* 1"

**T25 Filament**

**VO-FT25W4-12**



Dist: Led Lighting Solutions Canada  
514-951-7654 / 1-855-951-7654

**Votatec**





- Power: 6W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 600 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E26
- Dimension: 7-1/2" \* 1-1/4"

### T30 Filament

**VO-FT30W6-26**



- Power: 5W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 500 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E26
- Dimension: 4-1/2" \* 1-6/8"

### T45 Filament

**VO-FT45W5-26**



- Power: 4W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 400 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E12 ( Anti-Shock )
- Dimension: 3-1/8" \* 2"

**G15 E12 Filament**

**VO-FG15W4-12**



- Power: 4W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 400 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E26
- Dimension: 2-7/8" \* 2"

**G15 E26 Filament**

**VO-FG15W5-26**



- Power: 4.8W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 400 Lm
- CCT: 2200K
- Beam Angle: 360°
- Base: E26
- Dimension: 5-1/2" \* 2-1/2"

### ST64 Filament

**VO-ST64W4.8-120**



- Power: 6W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 600 Lm
- CCT: 2700K
- Beam Angle: 360°
- Base: E26
- Dimension: 5-1/2" \* 2-1/2"

### ST64 Filament

**VO-ST64W6-120**





- Power: 6.5W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 700 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E26
- Dimension: 5-1/2" \* 2-1/2"

**ST64 Filament**

**VO-FST64W6.5-26**



- Power: 4W
- Input Voltage: 120V
- Power Factor: 0.7
- Brightness: 400 Lm
- CCT: 3000K
- Beam Angle: 360°
- Base: E12 ( Anti-Shock )
- Dimension: 3-7/8" \* 1-1/2"

**ST12 Filament**

**VO-FST12W4-12**





Dist: Led Lighting Solutions Canada  
514-951-7654 / 1-855-951-7654



- Power: 6W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 550 Lm
- CCT: 2700K
- Beam Angle: 360°
- Base: E26
- Dimension: 4-1/8" \* 2-3/8"

## A19 Filament

**VO-FA19W6-120**



No Glare

Efficient Thermal  
Dissipation

CRi > 80

15,000 Hrs

Instant On

No Flicker

Dimmable

IC

- Power: 3.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 350~400 Lm
- CCT: 3000K/4000K/6000K
- Beam Angle: 360°
- Base: E12 ( Anti-Shock )
- Dimension: 2-1/8" \* 5/8"

## E12

**E12-CR45LEDA**



No Glare

Efficient Thermal  
Dissipation

CRi > 80

15,000 Hrs

Instant On

No Flicker

Dimmable

IC

- Power: 1.6W
- Input Voltage: 12V
- Power Factor: 0.9
- Brightness: 160 Lm
- CCT: 3000K/4000K/6000K
- Beam Angle: 360°
- Dimension: 1-3/8" \* 3/8"

**G4**

**G4-D02**



- Power: 3.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 350~400 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 360°
- Dimension: 2-1/8" \* 5/8"

**G9**

**G9-CR45LEDA**





- Power: 4.5W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 450~500 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 360°
- Dimension: 2-1/8" \* 5/8"

**G9**

**G9-CR45LEDA**



- Power: 5.2W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 600~650 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 360°
- Dimension: 2-1/4" \* 6/8"

**G9**

**G9-CR64LED**





- Power: 7W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 560 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: E26
- Dimension: 2-1/4" \* 1-7/8"

## PAR16

**VO-PAR16W5-120**



- Power: 7W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 500 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: E26
- Dimension: 3-3/8" \* 2-1/2"

## PAR20

**VO-PAR20W7-120**





Dist: Led Lighting Solutions Canada  
514-951-7654 / 1-855-951-7654



- Power: 11W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 800 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: E26
- Dimension: 4-6/8" \* 3-6/8"



**PAR30**

**VO-PAR30W11-120**



- Power: 18W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 1400 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: E26
- Dimension: 5-1/4" \* 4-6/8"



**PAR38**

**VO-PAR38W18-120**



- Power: 7W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 500 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: GU10
- Dimension: 2-1/4" \* 1-7/8"



**GU10**

**VO-GU10W7-120**



- Power: 10W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 800 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 180°
- Base: GU24
- Dimension: 3-7/8" \* 2-3/8"



**GU24 A19**

**VO-GU24A19W10-120**



- Power: 7W
- Input Voltage: 12V
- Power Factor: 0.7
- Brightness: 500 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 40°
- Base: MR16
- Dimension: 1-6/8" \* 1-7/8"

**MR16**

**VO-MR16W7-12**



- Power: 10W
- Input Voltage: 120V
- Power Factor: 0.9
- Brightness: 800 Lm
- CCT: 3000K/4000K/5000K
- Beam Angle: 180°
- Base: E26
- Dimension: 4-3/8" \* 2-3/8"

**A19**

**VO-A19W10-120**





Scroll down

Scroll down

Scroll down





# Lamp Catalog

Distributed By

**LED LIGHTING SOLUTIONS CANADA**

1000 2000 3000 4000 5000 6000 7000 8000 9000

**BARRY CAINE** 514-951-7654 / 855-951-7654  
LEDLIGHTINGSOLUTIONSCANADA@BELL.NET