

EASTON



BOWHUNTING

2021 CATALOG





FIMJ 4MM/5MM/6MM

CARBON & METAL FUSED... THE WORLD'S MOST DEADLY ARROW

A micro diameter carbon arrow armed in a full metal jacket maximizes penetration driving through bone and tissue for better blood trails and quicker kills.

FMJ CONSTRUCTION



XX75 jacket is precision built in the Easton tube mill.

Exclusive process fuses the tubes into a single shaft.

Carbon core "backbone" made in Easton's Utah composites factory.





6-4 MM

T64 FULL METAL JACKET™

- Straightened to the highest industry specifications and coaxially aligned to ±3 milliradians to produce the most precise hunting arrow available today
- Built-in FOC front taper adds up to 30% more FOC versus conventional parallel shafts
- Available in two deflection factor sizes that cover the full range of arrow spines from 400 through 300 and shaft lengths from 26" to 32"
- RPS Inserts with 8-32 point and broadhead compatibility



INCLUDED



4MM MicroLite™ Nock
(6 grains)



T64™ RPS™ Insert
18 grains

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)

The T64 FMJ shaft profile features a 6mm point-end then seamlessly tapers down to a micro 4mm diameter at the nock end. This unique profile provides an integrated front-of-center (FOC) weight distribution that ensures more accurate arrow flight. The 4MM nock end greatly reduces friction in flight and through the target to maximize penetration.



SIZE	SHAFT WEIGHT	SPINE DEFLECTION	STOCK LENGTH	8-32 FIELD POINT
	GPI AVG.	Deflection Factor	Inches	85/100/125 Grains
7.9	13.3	DF 7.9	32	5/16
9.5	12.2	DF 9.5	30	5/16

4 MM

NEW 4MM FULL METAL JACKET™

+FMJ MATCH GRADE

- 4mm micro-diameter carbon core with 7075 alloy metal jacket
- Pre-installed 4mm Microlite™ nocks
- 8/32 4MM aluminum half-out inserts included for optimum FOC for hunting
- Easy target pull
- Straightness ±.002" (Match Grade ±.001")



INCLUDED NEW



4MM 8-32 Aluminum Half-Out
(50 grains)
Uses 8-32 thread 5/16" field points



4mm MicroLite™ Nock
(6 grains)

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)



Deep Six™ Steel Field Points
(100 grains)



4MM Titanium Half-Out
(55 grains)
Uses 8-32 thread 5/16" field points



4MM (G) Deep Six™ Steel HIT Insert
(20 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D.	4MM HALFOUT
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	SIZE
400	9.8	0.400	31.5	DP6-5	0.234	#2
340	11.0	0.340	32	DP6-5	0.240	#3
300	11.7	0.300	32.5	DP6-6	0.244	#4
250	12.3	0.250	33	DP6-6	0.247	#5

STANDARD .002"

MATCH GRADE .001"

5MM

5MM FULL METAL JACKET™

+FMJ MATCH GRADE +DANGEROUS GAME

- 5mm small-diameter carbon core with 7075-alloy metal jacket
- Pre-installed 5mm (X) nocks
- 5MM HIT 8-32 inserts included
- Easy target pull
- Straightness ±.002" (Match Grade ±.001")



INCLUDED



5MM HIT® Insert
[16 grains]



5MM X Nock™
[9 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



Deep Six™ Steel Field Point
[100 grains]




5MM Steel 8-32 Half-out
[75 grains]




Broadhead Adapter Ring



5MM Deep Six™ Steel RPS Insert
[25 grains]



5MM Brass HIT® Break-off 8-32 Insert
[Adjustable to 75-50 grains]



5MM Aluminum 8-32 Half-out
[25 grains]

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	BROADHEAD ADAPTER RING	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)		
500	9.1	0.500	31	17/64	BAR3	0.256	#1
400	10.2	0.400	31.5	17/64	BAR3	0.263	#2
340	11.3	0.340	32	9/32	BAR5	0.269	#2
300	12.0	0.300	32.5	9/32	BAR5	0.273	#2
250	11.5	0.250	33	9/32	BAR5	0.273	#2
250*	17.7	0.250	32.5	5/16	BAR7	0.290	NA

* Dangerous Game

6MM

6MM FULL METAL JACKET™

- 6MM reduced-diameter carbon core with 7075-alloy metal jacket
- Pre-installed 6MM (H) nocks
- 6MM ST RPS 8-32 inserts
- Easy target pull
- Straightness: ±.003"



INCLUDED



6MM ST RPS™ 8-32 Insert
[18 grains]



6MM H Nock™
[9 grains]

SOLD SEPARATELY



6MM Brass Break-Off 8-32 Insert
[Adjustable to 75-50 grains]



8-32 Multi Point
[85, 100, & 125 grains]



Broadhead Adapter Ring

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	
470	8.8	0.470	31	9/32	BAR6	0.277
390	9.7	0.390	31.5	9/32	BAR7	0.281
320	10.6	0.320	32	9/32	BAR7	0.287

AXIS 4MM/5MM

THE POWER OF MICRO CARBON

Perfect blend of deep penetration and speed. Minimizes wind drift keeping the arrow on target.



MADE IN USA

ACU CARBON CONSTRUCTION

Exclusive seamless continuous-fed process, creates uniform arrows with a more consistent spine and weight versus conventional wrapped carbon arrows. Every AXIS arrow comes off the USA production line with the accuracy you need to find the vitals every time.



4MM

NEW 4MM AXIS™ LONG RANGE +MATCH GRADE

- 4MM micro-diameter uniform ACU-CARBON fiber construction
- Pre-installed 4MM Microlite™ nocks
- 8/32 4MM aluminum half-out included for optimum hunting FOC
- Straightness: ±.003" (Match Grade: ±.001")



INCLUDED NEW



4MM 8-32 Aluminum Half-out
[50 grains]
Uses 8-32 thread 5/16" field points



4MM MicroLite™ Nock
[6 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



Deep Six™ Steel Field Points
[100 grains]



4MM Titanium Half-Out
[55 grains]
Uses 8-32 thread 5/16" field points



4MM Deep Six™ Steel HIT Insert
[20 grains]

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D	4MM HALFOUT
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	SIZE
250	9.8	0.250	33	DP6-6	0.244	#4
300	9.3	0.300	32.5	DP6-6	0.241	#4
340	8.3	0.340	32	DP6-4	0.234	#2
400	7.4	0.400	31.5	DP6-4	0.229	#1



EASTONARCHERY.COM

Available in: MATCH GRADE .001" STANDARD .003"



5MM

5MM AXIS™ +MATCH GRADE

- 5MM small-diameter uniform ACU-CARBON
- Pre-installed 5MM (X) nocks
- 5MM HIT 8-32 inserts included
- Straightness ±.003" [Match Grade: ±.001"]



INCLUDED



5MM HIT® Insert
[16 grains]



5MM X Nock™
[9 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



5MM Deep Six™ Steel RPS Insert
[25 grains]



Deep Six™ Steel Field Point
[100 grains]



5MM Brass HIT® Break-Off 8-32 Insert
[Adjustable to 75-50 grains]



5MM Steel 8-32 Half-out
[75 grains]



5MM Aluminum 8-32 Half-out
[25 grains]



Broadhead Adapter Ring

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	BROADHEAD ADAPTER RING	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
700	6.1	0.700	31.5	17/64	BAR3	0.245	#1
600	7.2	0.600	30.5	17/64	BAR3	0.253	#1
500	8.1	0.500	31	17/64	BAR3	0.258	#1
400	9.0	0.400	31.5	17/64	BAR4	0.264	#2
340	9.5	0.340	32	9/32	BAR5	0.267	#2
300	10.7	0.300	32.5	9/32	BAR6	0.275	#2
260	11.5	0.260	34*	9/32	BAR6	0.280	#2

5MM

5MM AXIS™ SPORT

- 5MM small-diameter uniform ACU-CARBON
- Pre-installed 5MM (X) nocks
- 5MM 8-32 aluminum half-out included
- Straightness ±.005"



INCLUDED



5MM X Nock™
[9 grains]



5MM Aluminum 8-32 Half-out
[25 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



Deep Six™ Steel Field Point
[100 grains]



5MM Steel 8-32 Half-out
[75 grains]



5MM Deep Six™ Steel RPS Insert
[25 grains]



5MM Brass HIT® Break-Off 8-32 Insert
[Adjustable to 75-50 grains]



5MM HIT® Insert
[16 grains]

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	BROADHEAD ADAPTER RING	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
700	6.1	0.700	31.5	17/64	BAR3	0.245	#1
600	7.2	0.600	30.5	17/64	BAR3	0.253	#1
500	8.1	0.500	31	17/64	BAR3	0.258	#1
400	9.0	0.400	31.5	17/64	BAR4	0.264	#2
340	9.5	0.340	32	9/32	BAR5	0.267	#2
300	10.7	0.300	32.5	9/32	BAR6	0.275	#2
260	11.5	0.260	34*	9/32	BAR6	0.280	#2



4 MM

AC PROCOMP™

- Target precision in a hunting shaft
- Four sizes configured for hunting
- 4MM micro diameter aluminum core with outer carbon layer
- Straightness ± .0015"
- 4MM 8-32 aluminum half-out inserts included
- 4MM Microlite™ nocks included



INCLUDED



4MM MicroLite™ Nock
[8 grains]

NEW



4MM 8-32 Aluminum Half-Out
[50 grains]
Uses 8-32 thread 5/16" field points

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



Titanium Half-Out
[55 grains]
Uses 8-32 thread 5/16" field points



4MM Deep Six™ Steel HIT Insert
[20 grains]

SIZE	SHAFT WEIGHT		STOCK LENGTH Inches	RPS POINT O.D. Inches	O.D. Inches	4MM HALFOUT Size
	GPI	Deflection in Inches				
250	10.8	0.250	34	5/16	0.245	#4
300	9.5	0.300	33.63	5/16	0.236	#2
340	8.9	0.340	33.63	5/16	0.231	#1
380	8.3	0.380	32.62	5/16	0.227	#1

6.5 MM

NEW

EASTON 6.5™ MATRIX™ +MATCH GRADE

- 6.5MM uniform ACU-CARBON
- Pre-installed 6.5MM Microlite™ nocks
- 6.5MM inserts included
- Straightness ±.003" [Match Grade ± .001"]



INCLUDED



6.5MM MicroLite™ Nock
[8 grains]



6.5MM™ Insert
[23 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



6.5MM Brass Insert
[75, 50 grains]

SIZE	SHAFT WEIGHT		STOCK LENGTH Inches	RPS POINT O.D. Inches	O.D. Inches
	GPI	Deflection in Inches			
500	6.9	0.500	30.75	9/32	0.287
400	7.4	0.400	31.25	9/32	0.291
340	8.1	0.340	31.75	9/32	0.295
300	8.8	0.300	32.25	9/32	0.298
250	9.4	0.250	32.5	9/32	0.302



STANDARD .003"

MATCH GRADE .001"

6.5 MM


EASTON 6.5™

MATCH GRADE • HUNTER CLASSIC • BOWHUNTER
+READY TO SHOOT JUNIOR

- 6.5MM uniform USA made ACU-CARBON
- Pre-installed 6.5MM MicroLite™ nocks
- 6.5MM or CB inserts included
- MATCH GRADE Straightness ± .001"
- HUNTER CLASSIC Straightness ± .003"
- BOWHUNTER Straightness ± .006"
- READY-TO-SHOOT JUNIOR 26" & 28" Size 500



Easton's exclusive, ACU-CARBON process is a continuous-fed, single-die, single-mandrel manufacturing method. This creates uniform arrows with a more consistent spine and weight from dozen to dozen, lot to lot.

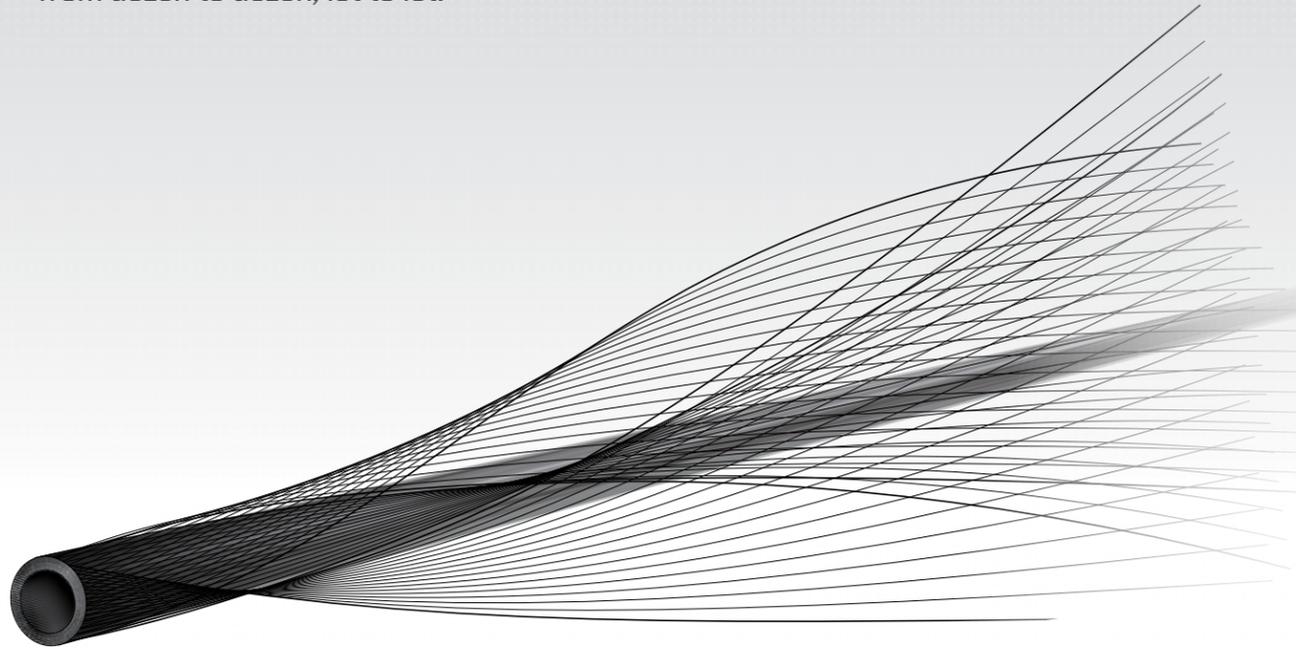

INCLUDED



6.5MM MicroLite™ Nock
(8 grains)



6.5™ Insert
(23 grains) *Included with Classic & Match Grade*



CB™ Insert
(21 grains) *Included with Bowhunter and Pre-installed in 6.5 RTS Junior*

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)



6.5MM Brass Insert
(75, 50 grains)



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
500	7.3	0.500	30.5	9/32	0.287
400	8.4	0.400	31	9/32	0.294
340	9.3	0.340	31.75	5/16	0.298
300	9.5	0.300	32.25	5/16	0.300
NEW 250	10.0	0.250	32.5	5/16	0.301



6.5 MM

NEW

6.5™ WHITEOUT

Whiteout™ is the next evolution of graphics on a hunting arrow. It offers high visibility flight and big game blood traceability. Shoot Whiteout™ and see what you've been hitting.



- 6.5MM uniform USA made ACU-CARBON
- Pre-installed 6.5MM Super Nocks™
- 6.5MM inserts included
- Straightness ± .003"



INCLUDED



6.5MM™ Insert
[23 grains] Included with Classic & Match Grade



6.5MM Super Nock™
[13 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



6.5MM Brass Insert
[75, 50 grains]



Broadhead Adapter Ring

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
500	7.5	0.500	30.75	9/32	0.291
400	8.1	0.400	31.25	9/32	0.294
340	8.8	0.340	31.75	9/32	0.298
300	9.6	0.300	32.25	9/32	0.301

5 MM

5MM AXIS™ TRADITIONAL



- 5MM uniform USA made ACU-CARBON
- Pre-installed 5MM [X] nocks
- 5MM HIT 8-32 inserts included
- Straightness ±.003"

Wood Grain Graphics



INCLUDED



5MM HIT® Insert
[16 grains]



5MM X Nock™
[9 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



5MM Steel 8-32 Half-out
[75 grains]



5MM Brass HIT® Break-Off 8-32 Insert
[Adjustable to 75-50 grains]



5MM Aluminum 8-32 Half-out
[25 grains]



Broadhead Adapter Ring

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
NEW 700	6.8	0.700	31.5	17/64	BAR 3	0.245	#1
600	7.9	0.600	32.25	17/64	BAR3	0.253	#1
500	8.9	0.500	32.5	17/64	BAR3	0.261	#1
400	9.8	0.400	32.75	9/32	BAR4	0.267	#2
340	10.3	0.340	33	9/32	BAR5	0.270	#2



TRADITIONAL

NEW

CARBON LEGACY™

- Realistic woodgrain traditional finish carbon fiber construction
- Hi-visibility hand-dipped white back end paint
- Pre-installed white 6.5MM 3D Supernocks™
- Straightness: ±.005"
- 4" shield-cut helical fletch feathers
- .244" inside diameter



TRADITIONAL

LEGACY™

- 7075-T9 aluminum alloy
- Full-diameter taper nock swage
- Straight-offset feather fletched
- Straightness: ±.002"



INCLUDED



6.5MM 3D Super Nock™
[13 grains]



.244 Insert
[13 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



.244 Brass Insert
[75, 50 grains]

INCLUDED



Conventional Nock
[on fletched arrows]



RPS™ Insert

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
700	7.1	0.700	34	9/32	0.289
600	7.5	0.600	34	9/32	0.291
500	8.3	0.500	34	9/32	0.296
400	9.3	0.400	34	9/32	0.301
340	10.1	0.340	34	5/16	0.307

For full specifications see page 51.

SIZES	1916, 2016, 2018, 2117, 2216, 2219
Strength (PSI)	95,000
Nock System	Conventional



6 MM

HEXX™

+HEXX FOC

- 6MM reduced-diameter ultra-lightweight high-strength carbon
- Pre-installed 6MM (H) nocks
- 6MM MicroLite™ 8-32 inserts
- Straightness: ±.001



INCLUDED



6MM MICROLITE™ 8-32 Insert
(9 grains)



6MM H Nock™
(9 grains)

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)



6MM HP™ Point



6MM X-UNI Bushing



6MM Brass Break-Off 8-32 Insert
(Adjustable to 75-50 grains)



6MM ST RPS™ 8-32 Insert
(18 grains)

Hexx F.O.C. comes in sizes: 260, 330, and 400 with brass inserts included.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.3	0.480	29.5	9/32	BAR5	0.271
400	7.2	0.400	31	9/32	BAR6	0.276
330	7.9	0.330	31.5	9/32	BAR6	0.280
260	9.3	0.260	32	9/32	BAR 7	0.288

6 MM

BLOODLINE™

+BLOODLINE FOC

- 6MM reduced-diameter uniform USA made ACU-CARBON construction
- 6MM ST RPS 8-32 inserts
- Pre-installed 6MM (H) nocks
- Straightness: ±.003"



INCLUDED



6MM ST RPS™ 8-32 Insert
(18 grains)



6MM H Nock™
(9 grains)

SOLD SEPARATELY



6MM Brass Break-Off 8-32 Insert
(Adjustable to 75-50 grains)



8-32 Multi Point
(85, 100, & 125 grains)



6MM HP™ Point
(80/100 grains)

Bloodline F.O.C. model comes in sizes: 240, 330, and 400 with brass inserts included.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.8	0.480	29.5	9/32	BAR7	0.275
400	7.7	0.400	31	9/32	BAR7	0.280
330	8.7	0.330	31.5	9/32	BAR7	0.285
240	9.4	0.240	32	9/32	BAR7	0.287





6MM

AFTERMATH™

- 6MM reduced-diameter uniform USA made ACU-CARBON construction
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness: ±.005"



INCLUDED



6MM ST RPS™ 8-32 Insert
[18 grains]



6MM H Nock™
[9 grains]

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]



6MM Brass Break-Off 8-32 Insert
[Adjustable to 75-50 grains]

SIZE	SHAFT WEIGHT		SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
600	6.4	0.600	30.75	9/32	BAR6	0.269	
500	7.3	0.500	30.75	9/32	BAR6	0.276	
400	8.8	0.400	31.25	9/32	BAR7	0.283	
340	9.6	0.340	31.75	9/32	BAR7	0.287	
300	10.2	0.300	32.25	9/32	BAR7	0.291	

CARBON

WHITEBOX™

- 100% straightness checked
- 29.5 arrow length [ATA Standard]
- For bows up to 70 lbs.
- 420 grain total weight
- Weight matched
- Vanes, inserts, nocks, and field points included



INCLUDED



6.5MM CB™ Insert
[21 grains]



8-32 Multi Point
[85, 100, & 125 grains]



Super Nock™
[13 grains]

GRAB, GO, SHOOT.

XX75

CAMO HUNTER™

- Pre-installed Super Nocks™ or X Nocks™
- RPS inserts included
- 7075-T9 aluminum alloy
- Straightness: ±.002



INCLUDED



RPS™ Insert



Super UNI Bushing®



Super Nock™
[13 grains]

INCLUDED with 1816 & 1916 Only



5MM X Nock™
[9 grains]



X UNI Bushing®

SIZES 1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413

Strength (PSI) 96,000

Nock System Super UNI and X nock

For full specification see page 51.

XX75

GAMEGETTER™

- Pre-installed Super Nocks™
- RPS inserts included
- 7075-T9 aluminum alloy
- Straightness: ±.003"



INCLUDED



RPS™ Insert



Super Nock™
[13 grains]



Super UNI Bushing®

SOLD SEPARATELY



8-32 Multi Point
[85, 100, & 125 grains]

SIZES 500, 400, 340, 300

Strength (PSI) 96,000

Nock System Super UNI

For full specification see page 51.



CROSSBOW

FMJ™ • EASTON 9MM™ • XX75 MAGNUM™

FULL METAL JACKET

- RPS inserts
- High-strength carbon core with 7075 alloy metal jacket
- Easy target pull
- Straightness: ±.003"

EASTON 9MM

- High-strength carbon construction
- 20" and 22" lengths
- Factory installed inserts and nocks

XX75 MAGNUM

- Hard-anodized finish
- 7075-T9 aluminum alloy
- 2219 size
- Tensile strength (psi): 96,000
- Easy target pull

FMJ

LENGTH (inches)	APPROXIMATE ARROW WEIGHT (grains)*	I.D.	O.D.
20	454	0.287	0.344
22	481	0.287	0.344

EASTON 9MM

LENGTH (inches)	APPROXIMATE ARROW WEIGHT (grains)*	I.D.	O.D.
20	379	0.300	0.344
22	397	0.300	0.344

XX75 MAGNUM

LENGTH (inches)	APPROXIMATE ARROW WEIGHT (grains)*	I.D.	O.D.
20	435	0.297	0.344
22	462	0.297	0.344

*Estimated finished arrow weight with 100 grain point allowance.

NOCKS



Flatback Nock
(9 Grains)



Halfmoon Nock
(11 Grains)

POINTS/INSERTS



8-32 Multi Point
(85, 100, & 125 grains)



FMJ Brass Bolt Insert
(120 Grains)



FMJ Bolt HP Insert
(40 Grains)



Insert [2219]
(26 grains)



9MM Insert
(61 Grains)



9MM Brass Insert
(100 Grains)





EZ FLETCH™ Fletching Tools

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"



VANES

All weights are within ±0.5 grain

2" BULLY™ VANES

Ultra-stiff design for high speed stability



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6.5	<ul style="list-style-type: none"> ● Fire Orange ● Bright Green ● Red ● Yellow ○ White 	100 Ct.

BULLY BOAT TAIL™ VANES

Ultra-stiff design for high speed stability • Exclusive Boat Tail shape for superior accuracy



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.500	7	<ul style="list-style-type: none"> ● Bright Green ● Fire Orange 	100 Ct.
300	3.00	.500	10	<ul style="list-style-type: none"> ● Yellow ● Red ○ White 	100 Ct.

DIAMOND HD 3" VANES™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	<ul style="list-style-type: none"> ● Bright Green ● Yellow ● Blue ● Red ○ White ● Pink ● Orange 	100-count bag

DIAMOND VANES™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> ● Bright Green ● Fire Orange 	100-count bag
235	2.375	.375	4	<ul style="list-style-type: none"> ● Sunset Gold ○ White 	
280	2.875	.500	6	<ul style="list-style-type: none"> ● Yellow ● Black 	
380	3.875	.500	8	<ul style="list-style-type: none"> ● Hot Pink 	

TITE FLIGHT™ VANES

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
200	2.00	.330	4	<ul style="list-style-type: none"> ● Hot Pink ○ White ● Bright Green ● Black ● Fire Orange ● Yellow 	100-count bag

SPIN WING VANES™

1.75-inch vanes available in right or left • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow

Spin Wing Vane is a trademark of Range-O-Matic Archery Company.

TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



FASTSET™ VANE GEL

- Sizes: 3 gram



CROSSBOW RAIL LUBE

- Full synthetic formula provides maximum lubrication for crossbow rails
- Protects string from damage



3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner—removes dirt, wax and contaminants from bowstring
- Bowstring Revitalizer—restores color and penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights
- Includes 1m red thread and 1m black thread



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



PUCK ARROW PULLER

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage
- Best for tight single spot groups



BROADHEAD WRENCH

- For safe installation and removal of broadheads from arrows



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



ANGEL MAJESTY™ SERVING

- Two sizes .018 and .021.
- Highest quality serving available
- Greatest dimensional stability
- Extremely long wearing
- Made in Japan
- .018—100 meters/109 yds. per spool
- .021—80 meters/87 yds. per spool



BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



ARCHERY OMNI TOOL BY FIX-IT STICKS® - 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Compatible with any standard 1/4" drive bit
- Breaks down for portability but durable enough for shop use
- Perfect for servicing all types of compound and recurve bows, cam modules, and accessories
- Includes the following bit sizes:
Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
Metric Sizes: 1.5, 2.5, 3.0
Star Tip Sizes: T10, T15, T20



PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes 7/32 and 1/4



TOOLS & SUPPLIES

BOW-SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



RECURVE BOW STRINGER

- Molded rubber-cupped stringer recommended for stringing target recurve bows
- Makes stringing safe and easy



9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 AND 8 PIECE KITS INCLUDE:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered Case Cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

6-PIECE CROSSBOW KIT INCLUDES:

- Small folding allen wrench set
- Zippered Cube Case
- Rail lube wax
- Wedge arrow puller
- Broadhead wrench
- Scope lens cleaner cloth

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



6-PIECE CROSSBOW KIT

12-PIECE PRO SHOP

8-PIECE VALUE PACK

SHOOTING ACCESSORIES



STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D

DELUXE ARM GUARD

- Progressive designs molded from durable poly-carbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING

- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS



ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



Quiver belt included

ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white



Accessory Clip (included)

ELITE™ RELEASE POUCH



Removable Pocket (included)

Release Pouch (sold separately)

ELITE™ TAKEDOWN HIP QUIVER WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



Quiver belt included


*Modular system can accommodate multiple configurations

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver



Quiver belt included

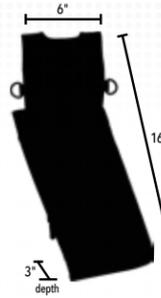

DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver



Quiver belt included



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop pocket for right/left side wear
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOW CASES

NEW BOWTRUK™ 4716 TRAVEL BOWCASE

- Accommodates two bows up to 47"
- 47" L X 16" W X 9" H
- Cordura 1680D Type 6,6 ballistic nylon shell
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retention straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey



DELUXE 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Dimensions [36"Lx15"Wx9"H]
- Compatible with the Easton Deluxe 33" & 36" arrow cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter for maximum contents protection
- Airline travel cover recommended [sold separately]
- Color: black/orange



ROLLER BOWCASE TRAVEL COVERS

- Fits Deluxe 3615 Roller Recurve bow cases
- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot
- Water resistant



ELITE 2.0 4717 DOUBLE BOW CASE

- Accommodates two full-size target bows up to 47" in overall length
- Case-cube compatible double-fleece main compartment
- Double or single bow with opposite side clothing storage
- 360° exterior padding
- Dimensions 47"x17"

- Movable hook-and-loop bow anchor system
- Eight interior and exterior accessory pockets with dedicated separate compartments for quivers, stabilizers, and arrow storage
- Compatible with Easton arrow totes & Deluxe 33" & 36" arrow boxes
- Padded shoulder strap and comfortable carry handle
- Available in black/grey color



BOW CASES

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360 degree exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: flo-green, teal, red, black, and blue



WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: NEW charcoal, Realtree® Edge, teal/grey, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: NEW black, Realtree® Edge, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

DELUXE 4517 BOW CASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (case cubes sold separately)
- Fits most bows —interior dimensions 44" x 16"
- Movable bow-anchoring straps for rock-solid bow security
- 360° padding for complete bow protection
- Colors: Realtree® Max-1/lavender



Realtree Max1 is a trademark of Jordan Outdoor Enterprises, Ltd.

MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: pink/yellow, black/grey, grey/red, Realtree® Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Pink, and Black
- 40" L x 14" H



BOWSLICKER™

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: Olive Green



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158

PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: teal, flo-green, grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

BOW CASE ACCESSORIES



CASE CUBES™ BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all Easton bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



CROSSBOW

CROSS-GO™ 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Overall dimensions 41" long x 26" wide
- 360° padded soft sided case with 3 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton crossbow arrow case
- Colors: Olive/Grey



DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe molded crossbow arrow case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Compatible with both standard and reverse limb crossbows
- Includes one corner case cube pocket
- Inside dimensions 41" x 26"
- Color: Black/Orange



CROSSBOW SLICKER™

- Fits crossbows from 15" to 30" axle-to-axle
- Rugged, weatherproof fabric
- Ultra-light—weighs less than 8 oz
- Color: Olive Green



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158

BEGINNER ARCHERY



VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed—ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length

ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28" arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink



BEGINNER FINGER TAB

- For right handed archers



SCOUT 2™


- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed
- 26" or 28"



BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

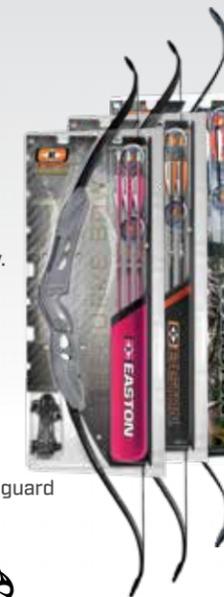

Kit colors: Black, Pink, and Realtree® Xtra



POINTS, INSERTS

POINTS



6MM HP™ Point
Fits H (6MM) diameter arrows
Point Weight – 80 & 100 Grains



6.5MM CB™ Point 6.5MM
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains

THREADED POINTS



Multi Point™
17/64" – 125 grains
9/32" – 125 grains
5/16" – 100, 125 grains
11/32" – 100, 125 grains



Deep Six™ Field Points
Fits G (4MM) & X (5MM) arrows with
Deep Six thread inserts
100 Grains

INSERTS



.244 Insert
[13 grains]



.244 Brass Insert
[75, 50 grains]



Deep Six™ Steel G (4MM) HIT Insert
Fits G (4MM) diameter
carbon, A/C & FMJ arrows
Uses Deep Six thread points
20 Grains



5MM Deep Six™ Steel X RPS® Insert
Fits X (5MM) diameter FMJ and AXIS
Uses Deep Six thread points
25 Grains

INSERTS



RPS™ Insert



**Brass X (5MM) HIT®
Break-Off Insert**
75 – 50 Grains



5MM X HIT® Insert
18 grains
Dozen Pack and 100 count Bulk



6MM RPS Insert
18 grains



6MM H Brass Insert
75 – 50 grains



6MM MicroLite™ H Insert
9 Grains



6.5MM CB™ Insert
21 grains



6.5MM™ Insert
23 grains



T64™ RPS Insert
18 grains



4MM Titanium Half-Out
55 grains



4MM Aluminum Half-Out
[50 grains]

NEW

INSERTS



5MM Aluminum 8-32 Half-out
25 grains



5MM Steel 8-32 Half-out
75 grains

BOLT INSERTS



Aluminum (2219)
40 Grains



FMJ™ Brass
120 Grains



9MM Crossbow Insert
61 Grains



9MM Brass Insert
[100 Grains]

UNI BUSHINGS



6MM X-UNI™



Super UNI Bushing®

NOCKS

INDEXABLE NOCKS



4MM G Nock™
Colors: blue, white, green, orange, deep red
Throat: Small=0.096, Large= 0.112
Dozen Pack and 100-count Bulk
6 grains



6MM H Nock™
Colors: white, yellow, green, orange, deep red
Throat: 0.111
Dozen Pack and 100-count Bulk
9 grains



6.5MM MicroLite™ Super Nock™
Colors: blaze, emerald, yellow, red, smoke, white
Throat: 0.108
Dozen Pack and 100-count Bulk
8 grains



4MM Microlite™ Nock
Colors: deep red, green, lemon-lime and blue
Throat: 0.112
Dozen Pack and 100-count Bulk
6 grains



N Nock™
Fits Genesis
Colors: red, white, green, orange, grey, yellow
Dozen Pack and 100-count Bulk
17 grains



5MM X Nock™
Colors: black, white, yellow, green, orange, blue,
smoke, bone, red
Throat: 0.111
Dozen Pack and 100-count Bulk
9 grains



6.5MM 3D Super Nock™
Colors: black, green, orange, white, crystal, lemon-lime,
purple, red, and smoke, pink, blue
Throat: 0.103
Dozen Pack and 100-count Bulk
13 grains

CONVENTIONAL NOCKS



Conventional Nock—Swaged Shafts
Colors: green, orange, white, red
Dozen Pack and 100-count Bulk

CROSSBOW NOCKS



Halfmoon & Flatback Nocks
Colors: red, orange, green, (model specific)
Dozen Pack and 100-count Bulk
Flatback (9 grains) Half Moon
11 grains

BROADHEAD ADAPTER RING (BAR)



[See arrow model pages for fitment] Use the BAR when required by broad-head design – fixed broadheads that utilize the face of the insert to support or hold the blades in place and mechanical broadheads that use the insert as a stop for the blades after opening require BAR's.
Dozen Clamshell Pack

For use with carbon and A/C arrows
For micro diameter arrows
Provides superior broadhead alignment
Protects shafts from hard impacts
and blade expansion

V3™ EXPANDABLE VARMINT POINT

Expandable action
Files exactly like field points
Conventional thread or
Deep Six

Helps prevent lost arrows
Replaceable blades
100 grains



V3 – 8-32 Thread



V3 – Deep Six Thread

For component fitment, see arrow model pages for shaft diameter specification.

For component fitment, see arrow model pages for shaft diameter specification.



FMJ AND CARBON ARROW SIZE SELECTION

COMPOUND BOW BOW RATING TO 301-340 FPS	YOUR ARROW LENGTH										RECURVE	LONGBOW
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"		
BOW POUNDAGE	BOW POUNDAGE											
22-26				700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460		38-43
27-31			700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5		44-49
32-36		700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	32-36	50-55
37-41	700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	37-41	56-61
42-46	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	42-46	62-67
47-51	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF 7.9	340, 330, 320, 300, DF7.9	47-51	68-73
52-56	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF 7.9	330, 320, 300, DF7.9	52-56	74-79
57-61	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF 7.9	300, 280, 260, 250, 240	57-61	80-85
62-66	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240	62-66	
67-72	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240		67-72	
73-78	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240			73-78	
79-84	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240					

Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.

ADJUSTING THE CHART TO YOUR BOW SET-UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:		Point Weights:	
Up to 300 FPS	subtract 5 lbs of bow weight	75 grains	subtract 3 lbs of bow weight
301-340 FPS	no adjustment	100 grains	no adjustment
341-350	add 5 lbs of bow weight	125 grains	add 3 lbs of bow weight
351 FPS or Higher	add 10 lbs of bow weight	150 grains	add 6 lbs of bow weight

HUNTING ARROW SELECTION

COMPOUND BOW

- Determine your correct arrow length per diagram on next page.
- Determine correct peak bow weight (not holding weight) and draw length with the assistance of a qualified archery pro shop.
- Determine the ATA (Archery Trade Association) rating velocity of your bow.
- Factor variables to the "standard compound setup" to determine CALCULATED bow weight. For compounds the "standard setup" includes use of a release aid and a brace height greater than 6.5". Deviations for the standard compound setup require factoring in EACH VARIABLE as follows:

A. Brace height lower than 6.5" - add 5 lbs to CALCULATED bow weight.

B. Finger release- add 5 lbs to CALCULATED bow weight.

Add the total of actual PEAK bow weight and all CALCULATED bow weight adjustments to determine final calculated weight. For example, with a 60 lb peak bow with a 6" brace height, calculated bow weight will be 60+5 for a calculated 65 lb bow weight. Now, in the "Calculated Peak Bow Weight" chart, select the column under the

Easton's selection charts are regularly updated to reflect the latest in bow performance. We continue to make adjustments to size recommendations based on increased bow efficiencies and more aggressive cam profile developments. Please read over the chart and all guidelines before selecting arrow shafts based on prior experience.

Every effort has been made to ensure the accuracy of this Product Guide. Graphics and images are for illustration purposes only. Due to on-going efforts to improve our products, Easton reserves the right to make changes without notice. 2021 products available for sale on or after December 1, 2020.



ATA range for your specific bow and your point weight. Follow the column down to your CALCULATED bow weight. Then, follow the chart to the right until you reach the column with your correct arrow length, and note the group letter (A-M). This letter will represent the suggested arrow group for your selection.

RECURVE OR LONGBOW (FINGER RELEASE)

It is critical that the correct bow weight be used when determining the weight column to be used on the chart. Actual peak bow weight should be measured at your correct draw length. Easton recommends the use of a dedicated bow scale or the assistance of a qualified pro shop for this purpose. Use the Recurve or Longbow ACTUAL weight chart on the right side of the chart to select the column corresponding to your bow type and point weight. Follow the column down to your bow weight and then follow the row to the left to find your suggested arrow group.

The Shaft Size listing below each group letter represents your suggested arrow shaft size. Note that providing incorrect weight or length information, or incorrect variable calculation, may result in an incorrect shaft size selection.

DETERMINING ARROW LENGTH

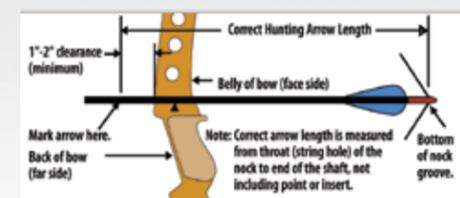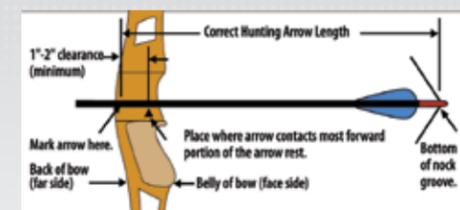

Every effort has been made to ensure the accuracy of this Product Guide. Graphics and images are for illustration purposes only. Due to our effort to continually improve our products, Easton reserves the right to make changes without notice.

SIZES BY MODEL

FMJ & A/C	700	600	500	480	470	460	420	400	390	380	340	330	320	300	280	260	250	240	
4-6MM T64 FMJ™	DF 7.9, 9.5																		
4MM FMJ™																			
4MM A/C PROCOMP™																			
5MM FMJ™ & MATCHGRADE																			
5MM FMJ DANGEROUS GAME™																			
6MM FMJ™																			
ALL CARBON	700	600	500	480	470	460	420	400	390	380	340	330	320	300	280	260	250	240	
4MM AXIS LONG RANGE™																			
5MM AXIS®																			
5MM AXIS SPT®																			
5MM AXIS MATCH GRADE®																			
5MM AXIS® TRADITIONAL																			
6MM BLOODLINE™																			
6MM HEX™																			
6MM AFTERMATH™																			
6.5MM MATCH GRADE™ HUNTER CLASSIC BOWHUNTER RTS JUNIOR																			
6.5MM MATRIX™																			
6.5MM WHITEOUT™																			
CARBON LEGACY™																			

For complete interactive arrow selection visit eastonarchery.com or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.

ALUMINUM ARROW SIZE SELECTION



COMPOUND BOW BOW RATING TO 301-340 FPS	YOUR ARROW LENGTH										RECURVE	LONGBOW
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"		
BOW POUNDAGE											BOW POUNDAGE	
22-26				1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114		38-43
27-31			1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213		44-49
32-36		1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	32-36	50-55
37-41	1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	37-41	56-61
42-46	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	42-46	62-67
47-51	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	47-51	68-73
52-56	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317	52-56	74-79
57-61	500, 2013, 2016	500, 2016	500, 2018, 2114,	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317		57-61	80-85
62-66	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317			62-66	85-91
67-72	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317				67-72	92-97
73-78	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317					73-78	98-103
79-84	400, 2117, 2215, 2216, 2314	400, 2119, 2216, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317							

Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.

ADJUSTING THE CHART TO YOUR BOW SET-UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:		Point Weights:	
Up to 300 FPS	subtract 5 lbs of bow weight	75 grains	subtract 3 lbs of bow weight
301-340 FPS	no adjustment	100 grains	no adjustment
341-350	add 5 lbs of bow weight	125 grains	add 3 lbs of bow weight
351 FPS or Higher	add 10 lbs of bow weight	150 grains	add 6 lbs of bow weight

SIZES BY MODEL

ALUMINUM	300	340	400	500	1816	1916	2013	2016	2018	2114	2117	2213	2215	2216	2219	2314	2315	2317	2413
GAMEGETTER™	●	●	●	●															
LEGACY™						●		●	●		●			●	●				
CAMO HUNTER™					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

For complete interactive arrow selection visit eastonarchery.com or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.

SHAFT MODELS

FMJ & A/C	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes	
4-6MM T64 FMJ™	Precision 7075 alloy jacket bonded to a carbon core	T64 RPS	8-32	Internal-fit	4MM Microlite™	±2 grains	± 3 Miliradians	Two tone Green/Silver	DF 7.9, DF 9.5	
4MM AC PROCOMP™ HUNTER	High-strength carbon fiber bonded to a 7075 core	4MM Aluminum Half-out	8-32	Internal-fit	4MM Microlite™	±0.5 grains	±.0015"	Polished black carbon	380, 340, 300, 250	
4MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	4MM Aluminum Half-out	8-32	Internal-fit	4MM Microlite™	±2 grains	±.002"	Diamond Pattern	400, 340, 300, 250	
5MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	5MM HIT® Insert	8-32	Internal-fit	5MM X™	±2 grains	±.002"	Diamond Pattern	500, 400, 340, 300, 250	
5MM FMJ MATCH GRADE™	Precision 7075 alloy jacket bonded to a carbon core	5MM HIT® Insert	8-32	internal-fit	5MM X™	±2 grains	±.001"	Diamond Pattern	500, 400, 340, 300, 250	
6MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	6MM ST RPS Insert	8-32	Internal-fit	6MM H™	±2 grains	±.003"	Two-Tone Gunmetal/Silver	470, 390, 320	
ALL CARBON	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes	
4MM AXIS LONG RANGE™	High-strength carbon construction fibers	4MM Half-out	8-32	Internal-fit	4MM Microlite™	±0.5 grain	±.003"	Black, Micro-smooth	400, 340, 300, 250	
5MM AXIS™	High-strength carbon-composite fibers	5MM HIT® Insert	8-32	Internal-fit	5MM X™	±2 grains	±.003"	Black, Micro-smooth	700, 600, 500, 400, 340, 300, 260	
5MM AXIS SPT™	High-strength carbon-composite fibers	5MM Half-out	8-32	Internal-fit	5MM X™	±2 grains	±.006"	Black, Micro-smooth	700, 600, 500, 400, 340, 300, 260	
5MM AXIS MATCH GRADE™	High-strength carbon-composite fibers	5MM HIT® Insert	8-32	Internal-fit	5MM X™	±2 grains	±.001"	Black, Micro-smooth	400, 340, 300, 260	
5MM AXIS™ TRADITIONAL	High-strength carbon-composite fibers	5MM HIT® Insert	8-32	Internal-fit	5MM X™	±2 grains	±.003"	Woodgrain Graphic	700, 600, 500, 400, 340	
CARBON LEGACY™	High-strength carbon-composite fibers	.244 Insert	8-32	Internal-fit	6.5MM 3D	±2 grains	±.005"	Woodgrain Graphic	700, 600, 500, 400, 340	
6MM BLOODLINE™	High-strength carbon-composite fibers	6MM HP Insert	8-32	Internal-fit	6MM H™	±2 grains	±.003"	Black, Micro-smooth	480, 400, 330, 240	
6MM HEXX™	UltraLite carbon composite fibers	6MM HP Insert	8-32	Internal-fit	6MM H™	±1 grain	±.001"	Black, Micro-smooth	480, 400, 330, 260	
6MM AFTERMATH™	High-strength carbon-composite fibers	6MM HP Insert	8-32	Internal-fit	6MM H™	±2 grains	±.005"	Black, Micro-smooth	600, 500, 400, 340, 300	
EASTON 6.5MM MATCH GRADE™	High-strength carbon-composite fibers	6.5MM Insert	8-32	Internal-fit	6.5MM	±2 grains	±.001"	Black, Micro-smooth	500, 400, 340, 300, 250	
EASTON 6.5MM HUNTER CLASSIC™	High-strength carbon-composite fibers	6.5MM Insert	8-32	Internal-fit	6.5MM	±2 grains	±.003"	Black, Micro-smooth	500, 400, 340, 300, 250	
EASTON 6.5MM BOWHUNTER™	High-strength carbon-composite fibers	CB Insert	8-32	Internal-fit	6.5MM	±2 grains	±.006"	Black, Micro-smooth	500, 400, 340, 300, 250	
6.5MM MATRIX PRO™	UltraLite carbon composite fibers	6.5MM Insert	8-32	Internal-fit	6.5MM	±2 grains	±.001"	Black, Micro-smooth	500, 400, 340, 300, 250	
6.5MM MATRIX™	UltraLite carbon composite fibers	6.5MM Insert	8-32	Internal-fit	6.5MM	±2 grains	±.003"	Black, Micro-smooth	500, 400, 340, 300, 250	
6.5MM WHITEOUT™	High-strength carbon-composite fibers	6.5MM Insert	8-32	Internal-fit	6.5MM	±2 grains	±.003"	White	500, 400, 340, 300	
6.5MM WHITEBOX™	High-strength carbon-composite fibers	6.5 CB Insert	8-32	Internal-fit	6.5MM	NA	NA	Black, Micro-smooth	One Size	
ALUMINUM	Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
CAMO HUNTER™	7075-T9	96,000	RPS Insert	8-32	Super UNI System or X UNI System	Super, 3D Super, X or MicroLite™	±1%	±.002"	4-Tone Black, Brown, Dark Green, & Light Green Dye Camo	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
LEGACY™	7075-T9	95,000	RPS Insert	8-32	Full-diameter Taper Swage	Conventional	±1%	±.002"	Cedar-Grain, PermaGraphic	1916, 2016, 2018, 2117, 2216, 2219
GAMEGETTER™	7075-T9	96,000	RPS Insert	8-32	Super UNI System Composite Bushing	Super or 3D Super	±1¼%	±.003"	Black, Hard-anodized	500, 400, 340, 300
FIBERGLASS	Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
SCOUT 2™	Fiberglass	Not Available	Not Available	Steel Sleeve	Open-ended slip-on	Over Nock	N/A	N/A	Orange	17/64"

LIMITED WARRANTY
The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonhunting.com.

Some of the products on these pages are covered by one or more of these patents: 7,004,859 - 7,077,770 - 7,115,055 - 7,115,055

CROSSBOW

MODEL	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
FMJ™	Precision 7075 alloy jacket bonded to a carbon core	HP Bolt Insert	RPS Point	Internal-fit	Halfmoon Flatback	±.2 grains	±.003"	Black, Diamond Pattern	20, 22
EASTON 9MM™	SuperLite Carbon multi-layer wrapped fibers	9MM Bolt Insert	RPS Point	Internal-fit	Halfmoon Flatback	±.2 grains	±.003"	Black, Micro-smooth	20, 22
MAGNUM XX75™	7075-T9 96,000	RPS Insert	RPS Point	Internal-fit	Halfmoon Flatback	±.2 grains	±.003"	Gray Anodize	20, 22

1 Guaranteed straight to more stringent standards than ATA/ ASTM methods.
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.
3 Tensile strength value may vary ±3%.
4 Grains-per-shafts in a dozen bundle.
®/™ Registered trademark/trademark of Easton.

Lost® Camo is a registered trademark of MCP IP LLC. Realtree™ is a registered trademark of Jordan Outdoors. Under Armour® is a registered trademark.

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size ^{1,10}	Shaft Weight XX75 ¹		Spine @28" Span	Stock Length ² XX75 ¹	Conventional Nock Size ³	UNI System ⁵			One-piece Bullet Point	RPS ⁶ Insert Alum.	RPS ⁶ Point Size
	Grains per Inch	Deflection in Inches				UNI Bushing ²	X Nock Bushing	Super UNI Bushing ⁸			
1816	9.3	0.756	30	3/32	8	4	—	74	12	3/32	
1916	10.0	0.623	31	3/32	9	7	—	82	16	3/16	
2013	9.0	0.610	32	3/16	—	—	5	—	21	3/16	
2016 (500)	10.6	0.531	32	3/16	—	—	4 ^{9,10}	90	20	3/16	
2018	12.3	0.464	30 1/2	3/16	—	—	4	—	19	3/16	
2114	9.9	0.510	31	—	(11)	—	7	100	25	3/16	
2117 (400)	12.0	0.407	31 1/2	3/16	—	—	7 ^{9,10}	100	25	3/16	
2213	9.8	0.458	31	—	(13)	—	9	100	30	1/32	
2215	10.7	0.419	31 1/2	—	—	—	9	100	30	1/32	
2216	12.0	0.376	32	1/32	—	—	9	100	29	1/32	
2219	13.8	0.337	32	1/32	—	—	8	—	26	1/32	
2314	10.7	0.391	32	—	(14)	—	10	100	34	1/32	
2315 (340)	11.7	0.342	32	—	—	—	11 ^{9,10}	100	37	1/32	
2317 (300)	13.3	0.297	32	—	—	—	11 ^{9,10}	100	37	1/32	
2413	10.4	0.365	32	—	(17)	—	12	100	40	1/32	

— Indicates not available
1 XX75 Camo Hunter, GameGetter, Legacy
2 Length is approximate stock shaft length for each size.
3 Nock size for conventional swaged nock taper.
4 UNI—Universal Nock Installation System.
5 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.
6 RPS = Replaceable Point System with 8-32 ATA Standard thread.
7 All components are ±1 grain.
8 Super UNI Bushing accepts Super Nock, 3D Nock, "S" Nock and Microlite Super Nock.
9 GameGetter composite bushing weight: 300 & 340=9 grains, 400=5 grains, 500=3 grains.
10 GameGetter shaft sizes indicated in parentheses.
Notes: Shaft size 1816 use BAR6; size 1916 uses BAR8 Broadhead Adapter Rings.

WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT WWW.BSAFE.WS OR 877-INFO-ETP (877-463-6387).

CHECK EVERY ARROW, EVERY SHOT

ARROW DAMAGE
Any arrow can be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at www.eastonarchery.com/warning-user/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**
A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.**

BOW INSPECTION

Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage.
WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.

WARNING: Cancer and Reproductive Harm — www.P65Warnings.ca.gov

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

- Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**
- While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow "relaxes" or twists easily, the carbon has been damaged. DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

SOLVENTS

CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the Easton Tuning Guide.) **WARNING! NEVER SHOOT A DAMAGED ARROW.**

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.



EASTONARCHERY.COM