



RAVENS BY KRUZ

MAGNUM 60



BUILT STRONG. BUILT TO LAST.


LIGHTER. STRONGER. SMARTER.

Premium all-aluminum platform trailer built without the bulk — engineered for maximum payload and long-term durability.



DEEP TAPERED MAIN BEAMS

28-1/2" deep beams taper to the nose and rear for concentrated-load capacity.

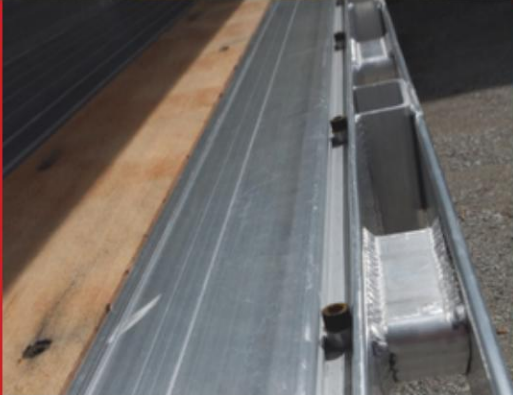

WELDED ALUMINUM RAILS

One-piece outer rail with integrated J-track, welded full length.



GALVANIZED FORKLIFT PKG.

Optional rear-mount forklift package, fully galvanized.



HEAVY-DUTY REAR END

Four vertical risers with 4" wide horizontal tube bumper.

SPECIFICATIONS

Floor	1-1/2" depth, multi-hollow core extruded aluminum (6061-T6) with (2) wood nailers
Main Rail	12" deep in neck, 28-1/2" deep in main, 19-1/2" deep at rear
Outer Rail	6-3/4" deep extruded aluminum (6061-T6), one piece with integrated "J" track
Rub Rail	3-1/4" wide x 3/8" aluminum, full length each side (6061-T6)
Front Channel	9-3/4" deep one piece full width (6061-T6), square corners
Crossmembers	5" aluminum channel (6061-T6) on 15" centers
Bumper	Four (4) heavy-duty vertical risers with 4" wide horizontal tube
Dock Bumper	Two rubber bumpers
Stake Pockets	4" H x 4" W x 1-5/8" D inside dim. on 24" centers with one (1) HD spool
Mud Flaps	Heavy-duty spray suppressant black rubber
Lengths	45', 48' or 53'
Widths	96" or 102"
Tires	295/75R22.5
Wheels/Disc	Eight (8) 8.25 x 22.5", 10-hole disc, hub piloted, unimount, machine-finish aluminum
Hubs	Four (4) 10-stud Duralite, hub piloted
Drums	Outboard mount, light-weight hub piloted
Brakes	16-1/2" x 7" Q-plus, non-asbestos lining, automatic slack adjusters, 4S/2M ABS with aluminum air tank
Suspension	Air ride
Axles	71-1/2" or 77-1/2" track to match suspension
Upper Coupler	48" height nominal
Landing Gear	Aluminum two-speed, 50,000-lb capacity
King Pin Plate	1/2" aluminum plate, 30" from front standard
Electrical	DOT; sealed LED lights and harness
Finish	Swirl-finished aluminum frame; all steel parts galvanized

BEAM LOAD RATINGS*

TRAILER SIZE	4 FT.	8 FT.	20 FT.	BASE** WT.
48'	60,000	66,000	80,000	8,900

* Load ratings calculated based on 10 ft. widespread suspension.
** Base model without options. Selected options may increase or decrease weight of finished trailer.

- LIGHTWEIGHT ALUMINUM**
Maximize payload and fuel efficiency.
- BUILT TO LAST**
All-aluminum construction with galvanized components.
- LOWER MAINTENANCE**
Corrosion-resistant materials mean less downtime.
- PROVEN PERFORMANCE**
Ravens quality and engineering you can trust.

STRONGER PAYLOADS. LOWER COSTS.

MAXIMUM VALUE.