

Fixture Model Number: TC1-R05

Lamp Model Number: L2

Spec Sheets Folder

Type:

A1



TYPE

SPECIFICATION DATA
PORTAL RECESSED 5.5" (TC1-R05)

ORDER GUIDE

1	2	3	4	5	6	7	8	9	10	11	12	OPTIONS
TC1	-	R	05									

1 FAMILY	2 VERSION	3 SIZE	4 CEILING	5 HOUSING / TRIM
TC1 Portal	-	R Recessed	05 5.5" 09 9"	D Drywall G Grid K1 Trim Flange K2 Drywall Trimless L1 Shallow Housing - Trim Flange ¹ L2 Shallow Housing - Drywall Trimless ¹

¹For 5.5", detached driver:
²Always shallow.

6 FINISH	7 BEAM SPREAD	8 CRI	9 CCT
FIXTURE / TRIM FINISH B Black Powdercoat S Metallic Silver Powdercoat W White Powdercoat C Custom Color (RAL)	OPTIC CHANNEL FINISH B Black Powdercoat S Metallic Silver Powdercoat W White Powdercoat C Custom Color (RAL)	N1 Narrow (30°) M1 Medium (45°) W1 Wide (65°)	8 80 CRI 9 90 CRI 27 2700 K 30 3000 K 35 3500 K 40 4000 K

10 ENERGY ²	11 DRIVER	12 VOLTAGE	OPTIONS
A 9 W B 12 W C 16 W D 21 W	F1 Non-Dim F2 0-10V Dim 3% E1 eidoLED ECO 0-10V Dim 1% E2 eidoLED SOLO 0-10V Dim 0.1% E3 eidoLED SOLO DALI Dim 1% E4 eidoLED SOLO DALI Dim 0.1% L1 Lutron Hi-Lume 1% EcoSystem (LDE1) L2 Lutron Hi-Lume 1% 2-Wire 120V (LTEA) L3 Lutron Hi-Lume Premier 0.1% EcoSystem (PEQ0) ³	M 120-277 V 1 120 V ⁴ 2 277 V ⁴ 3 347 V ⁵	B Battery Pack ⁶ C Chicago Plenum F 6" Flex Whip H Emergency Switch (CTD) ⁷

² Nominal input power.
Add 4 W for BP and 2 W for 347V.

³ Max Energy C (0.6 W).

⁴ Fixed voltage only for L2 Driver or
no light controls.

⁵ Detached driver/transformer for 5.5".

⁶ Detached, prewired BP, not shallow housing.
⁷ For 5.5", detached CTL, not shallow housing.

All rights reserved. © FluxwerX Illumination 2022 604.545.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have
limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.


PAGE 2 of 8
TC1-R05 | 2022-02



TYPE

SPECIFICATION DATA
PORTAL RECESSED 5.5" (TC1-R05)

PRODUCT DETAILS



FINISHES

All finishes high temperature powder coated. Fixture with trim shown.



BLACK FIXTURE / TRIM
BLACK OPTIC CHANNEL



SILVER FIXTURE / TRIM
SILVER OPTIC CHANNEL



WHITE FIXTURE / TRIM
WHITE OPTIC CHANNEL



BLACK FIXTURE / TRIM
WHITE OPTIC CHANNEL



SILVER FIXTURE / TRIM
BLACK OPTIC CHANNEL



WHITE FIXTURE / TRIM
BLACK OPTIC CHANNEL



RAL

All rights reserved. © FluxwerX Illumination 2022 604.545.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have
limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 3 of 8
TC1-R05 | 2022-02

MO Max Okst Lighting Design
maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: TC1-ST05

Lamp / LED Driver: L2

Type:

B1



ORDER GUIDE

1	2	3	4	5	6	7	8	9	10	11	12	OPTIONS
TC1	-	05										

1 FAMILY	2 VERSION	3 SIZE	4 CEILING	5 ATTACHMENT
TC1 Portal	-	5 Surface T Surface Adjustable	05 5.5" 09 9"	S Structure R Remote Driver

6 FINISH	7 BEAM SPREAD	8 CRI	9 CCT
BB Black Powdercoat SS Metallic Silver Powdercoat WW White Powdercoat CC Custom Color (RAL)	N1 Narrow (30°) M1 Medium (45°) W1 Wide (65°)	8 80 CRI 9 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K


10 ENERGY ¹	11 DRIVER	12 VOLTAGE	OPTIONS
A 9 W B 12 W C 16 W D 21 W	F1 Non-Dim F2 0-10 V Dim 3% E1 eidoLED ECO 0-10 V Dim 1% E2 eidoLED SOLO 0-10 V Dim 0.1% E3 eidoLED ECO DALI Dim 1% E4 eidoLED SOLO DALI Dim 0.1% L1 Lutron Hi-Lume 1% EcoSystem (LDE) L2 Lutron Hi-Lume 1% 2-Wire 120 V (LTEA) L3 Lutron Hi-Lume Premier 0.1% EcoSystem (PEQ0) ²	M 120-277 V 1 120 V ³ 2 277 V ³ 3 347 V ⁴	B Battery Pack ⁵ C Chicago Plenum H Emergency Switch (GTO) ⁶ P Oversize J-Box Canopy ⁵

All rights reserved. © Fluxwerx Illumination 2022 604.549.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 2 of 7
TC1-ST05 | 2022-02



PRODUCT DETAILS



FINISHES

All finishes high temperature powder coated.

(S) SURFACE



BLACK




METALLIC SILVER




WHITE

(T) SURFACE ADJUSTABLE



BLACK



METALLIC SILVER



WHITE



RAL

All rights reserved. © Fluxwerx Illumination 2022 604.549.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 3 of 7
TC1-ST05 | 2022-02



Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: TC1-P05

Lamp / LED Driver: L2

Type:

C1



SPECIFICATION DATA
PORTAL PENDANT 5.5" (TC1-P05)

ORDER GUIDE

1	2	3	4	5	6	7	8	9	10	11	12	13	OPTIONS
TC1	-	P	05										

1 FAMILY	2 VERSION	3 SIZE	4 CEILING	5 SUSPENSION
TC1 Portal	- P Pendant	►05 5.5" 09 9"	D Drywall G Grid S Structure R Remote Driver	03 Cord ≤ 3 ft 06 Cord ≤ 6 ft 12 Cord ≤ 12 ft Tx Stem 1-8 ft in 1ft increments T9 Stem 18"

6 FINISH	CANOPY / BASE FINISH	7 BEAM SPREAD	8 UP / DN DISTRIBUTION	9 CRI	10 CCT
FIXTURE FINISH* B Black Powdercoat S Metallic Silver Powdercoat W White Powdercoat C Custom Color (RAL)	B Black Powdercoat S Metallic Silver Powdercoat W White Powdercoat C Custom Color (RAL)	N Narrow (30°) M Medium (45°) W Wide (65°)	1 100 Dn 2 20 Up 80 Dn 5 50 Up 50 Dn	8 80 CRI 9 90 CRI	27 2700 K 30 3000 K 35 3500 K 40 4000 K

11 ENERGY ¹	12 DRIVER	13 VOLTAGE	OPTIONS
A 9 W B 12 W C 16 W D 21 W	F1 Non-Dim F2 0-10V Dim 3% E1 eidoLED ECO 0-10V Dim 1% E2 eidoLED SOLO 0-10V Dim 0.1% E3 eidoLED ECO DALI Dim 1% E4 eidoLED SOLO DALI Dim 0.1% L1 Lutron Hi-Lume 1% EcoSystem (LDE) L2 Lutron Hi-Lume 1% 2-Wire 120V (LTEA) L3 Lutron Hi-Lume Premier 0.1% EcoSystem (PE00) ²	M 120-277 V 1 120 V ⁴ 2 277 V ⁴ 3 347 V ⁵	B Battery Pack ⁶ C Chicago Plenum H Emergency Switch (CTD) P Oversize J-Box Canopy ³

All rights reserved. © Fluxwerx Illumination 2022 604.549.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 2 of 10
TC1-P05 | 2022-02



SPECIFICATION DATA
PORTAL PENDANT 5.5" (TC1-P05)

PRODUCT DETAILS



Integrated suspension and power cord under 1/8" diameter
Cantilever suspension arm
Aspheric optical technology creates a homogeneous circumference of light



LEVELING
Fixtures are factory pre-leveled and site adjustable.



STEM OPTION
0.4" diameter stem, finish matches fixture.
Length options:
12", 18", 24", 36", 48", 60", 72", 84", 96"

FINISHES

All finishes high temperature powder coated. Cord or rigid stem matched to fixture, except silver cord with white fixture.

DRYWALL



BLACK FIXTURE
(BLACK CORD)
BLACK CANOPY



BLACK FIXTURE
(WHITE CORD)
WHITE CANOPY



BLACK FIXTURE
(BLACK STEM)
WHITE CANOPY



SILVER FIXTURE
(SILVER CORD)
SILVER CANOPY



SILVER FIXTURE
(BLACK CORD)
WHITE BASE



SILVER FIXTURE
(SILVER STEM)
WHITE BASE



WHITE FIXTURE
(SILVER CORD)
WHITE CANOPY



WHITE FIXTURE
(BLACK CORD)
BLACK CANOPY



WHITE FIXTURE
(WHITE STEM)
BLACK CANOPY



RAL

All rights reserved. © Fluxwerx Illumination 2022 604.549.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 3 of 10
TC1-P05 | 2022-02



Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: Aramis LED AR168

Lamp / LED Driver: Lutron 2 Wire Dimming Driver


Type:

E1

LUMINIS®

AR168
ARAMIS - LED
Pendant

TYPE: QUANTITY: PROJECT: CATALOG NUMBER: FIXTURE WATTAGE VOLTAGE FINISH OPTION OPTION OPTION



- 1- Ø 5" (127mm) canopy with universal mounting plate.
- 2- 36" lg. (914mm) silver braided power cable with aircraft safety cable. Other lengths available on request (specify SPG with desired length).
- 3- Extruded aluminum driver housing.
- 4- LED heat sink.
- 5- Aluminum extruded reflector housing. Multi-facet etched aluminum elliptical 50° reflector.



MATERIALS

Aramis is made of an extruded aluminum housing designed to optimize functionality of the driver and solid state components.

- Standard 36" cable assembly.
- Cast aluminum heat sink to optimize heat management and luminaire efficacy.
- LED array is mechanically secured and easily removable for maintenance or upgrade.
- Aluminum reflector designed to optimize the LED light source performance and uniformity.

ELECTRICAL

LED DRIVER Standard driver is 0-10V dimming-ready (dims to 1%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of -20°C/-4°F to +50°C/122°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

LED Standard 4000K CCT/80 CRI. Other CCTs available from 2700K to 3500K, Optional 90 CRI (3000K) for critical color rendering. See electrical options.

LIFE 125,000hrs L₈₀B₁₀ (calculated projection from LM-80 data).

FINISH


Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

MOUNTING

Maximum weight: 5.5 lbs (2.5 kg)
Mounts on a standard 4" (102mm) octagonal electrical box with 3 1/2" (89mm) G/C mounting holes.
Fixture must be installed on a finished ceiling for exterior applications and/or when exposed to inclement weather.

CERTIFICATION

Tested to UL1598 and CSA 22.2 #250.
cULus listed damp location (exception: DMX models are dry location).
Photometric testing per LM79-2008, LED light source with LM80 certified testing. Rated IP20.




LUMINIS | Toll free: 866.586.4647 Fax: 514.683.8872 Email: info@luminis.com
260 Labrosse, Pointe-Claire (QC) Canada H9R 3L5

LUMINIS.COM

Luminaires may be altered for design improvement or discontinued without prior notice.

1

TYPICAL PHOTOMETRY SUMMARY



AR168-L160
Descriptive Information
Total delivered lumens: 6232 Lumens
Input watts at 120V: 55.7 W
S/P/W = 0.6
Source: LED
CCT/CRI: 4000K/80CRI
Maximum Candela = 11,999 @ 0°H/0°V

Please visit our web site www.luminis.com for complete I.E.S. formatted download data.

LUMINAIRE SELECTION

MODEL#	LED LIGHT SELECTION	VOLTAGE¹	FINISH
AR168	SUFFIX	INPUT WATTS	DELIVERED LUMENS
	LIL10	11W	1241
	LIL20	19W	2021
	LIL30	29W	3011
	LIL40	38W	4018
	LIL50	45W	5022
	LIL60	56W	6232
			CRI
			80
			CCT ²K
			4000K
			OPTIONAL
			120V
			277V
			347V
			STANDARD COLORS
			WHT Snow white
			BKT Jet black
			BZT Bronze
			HST Matte silver
			GRT Titanium gray
			DOT Gun metal
			CHT Champagne
			SOT Steel gray
			BOI English cream
			OPTIONAL COLORS
			CS Custom color
			RAL RAL color
			(Refer to color chart)

OPTIONS (Refer to page 3 for details)

ELECTRICAL	MOUNTING
☐ FS Fuse CCT Options - 4000K supplied as standard (Apply multiplier to listed values for lumens output reference) ☐ K27 2700K CCT 80 CRI (Multiplier 0.92) ☐ K3 3000K CCT 80 CRI (Multiplier 0.95) ☐ K30 3000K CCT min. 90 CRI (Multiplier 0.68) ☐ K35 3500K CCT 80 CRI (Multiplier 0.98) NOTE: Other CCT & higher CRI available, please consult factory.	☐ CAT3 Catenary suspension attachment with 12" adjustment mechanism ☐ CK Surface ceiling mount¹ ☐ WM Wall mount ☐ STM Field cuttable 36" stem with adjustable aircraft safety cable. (other lengths on request) ☐ SPG Longer silver braided power cord. Please add length with option suffix. ☐ DSPG 36" silver braided power cord and gray DMX-485 cable with adjustable aircraft safety cable. (Other lengths on request)²
CONTROL	EMERGENCY
☐ DMX/RDM DMX/RDM control dim to dark (0%)¹. Not available on LIL60. Housing increases by 2.4". IMPORTANT! Mounting must be selected. Choose between STM, DSPG or CK. ☐ NLTAIR2 nLight AIR Control gen2 embedded in canopy, with black antenna. 1" x 1"	☐ REHL2-50 Remote mount battery backup for LED, 90 min., 7W Remote mount to SOT - 12" Square enclosure with access cover. Integral battery backup for LED, 90 min., 7W integral to luminaire within oversized ceiling canopy. ☐ EMLC3 Integral battery backup for LED, 90 min., 7W integral to luminaire within a 9.35" tube mounted vertically below canopy.¹ ☐ EMLC4 Integral battery backup for LED, 90 min., 10W integral to luminaire.²

- NOTES
- 1- Luminaires are factory prewired for 120V unless otherwise specified.
 - 2- Default dimming curve: Logarithmic. Factory set to address one unless otherwise specified. Refer to DMX Reference Guide for more information (available on website).
 - 3- Surface ceiling mount extends 64" of fixture by 1" (25.4mm).
 - 4- DSPG option is only available if DMX/RDM option is selected.
 - 5- STM not available if DMX/RDM option is selected.
 - 6- Housing will increase by 1.2". Not available on LIL60. Not applicable for 347V.
 - 7- 120/277V only.
 - 8- Installed in either 811" or 815" canopy with STM/SPG. Refer to the mounting images for more details.
 - 9- Not compatible with DMX/RDM, CAT3, CK, WM, REHL2-50, EMLC2, EMLC3, EMLC4.
 - 10- White antenna available upon request.

LUMINIS®

LUMINIS | Toll free: 866.586.4647 Fax: 514.683.8872 Email: info@luminis.com
260 Labrosse, Pointe-Claire (QC) Canada H9R 3L5

LUMINIS.COM

Luminaires may be altered for design improvement or discontinued without prior notice.

2

MO

Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: Fold 20UP | 80DN (FD1xD)

Lamp / LED Driver: L2

Type:

F1



TYPE

SPECIFICATION DATA
FOLD 20 UP | 80 DN (FD1xD)

PRODUCT DETAILS



LINEAR ANODOLIC OPTIC

RUN LENGTHS

Standalone fixtures are available in 4', 6' + 8' nominal lengths.



Run lengths are available in 2' nominal increments.



All rights reserved. © Fluxwerx Illumination 2021 604.545.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 3 of 5
FD1x | 2021-03



TYPE

SPECIFICATION DATA
FOLD 20 UP | 80 DN (FD1xD)

ORDER GUIDE

1	2	3	4	5	6	7	8	9	10	11	OPTIONS	CONTROLS
FD1		D										

1 FAMILY	2 ENDCAP	3 OPTICAL DISTRIBUTION	4 ENERGY ¹	5 CRI-CCT	6 FINISH ²
FD1 Fold Suspended	A Arch B Oblique D Shade S Slant	A 45 Up 55 Dn B 100 Dn D 20 Up 80 Dn E 55 Up 45 Dn F 65 Up 35 Dn	A 19 W B 23 W C 29 W D 38 W	30 80 CRI 3000 K 35 80 CRI 3500 K 40 80 CRI 4000 K 93 90 CRI 3000 K 90 90 CRI 3500 K 94 90 CRI 4000 K	A Clear Anodized B Black Powdercoat S Metallic Silver Powdercoat W White Powdercoat C Custom Color (RAL)

¹ Nominal input power (W).
For 347 V with E1-4/L1
and 4 W to above.

² Fixture Finish only.
Canopies are standard white.

7 LENGTH	8 CEILING TYPE ⁴	9 DRIVER	10 VOLTAGE	11 SUSPENSION
D4 4 ft D6 6 ft D8 8 ft XX x ft ³	D Drywall G Grid S Structure R Remote	F1 Non-Dim F2 0-10 V Dim 3% 120-277 V F3 0-10 V Dim 3% 347 V (Class 2 control wiring) E2 eldoLED SOLO 0-10 V Dim 0.1% E3 eldoLED ECO DALI Dim 1% E4 eldoLED SOLO DALI Dim 0.1% L1 Lutron Hi-Lume 1% EcoSystem (LDE) L2 Lutron Hi-Lume 1% 2-Wire 120 V (LTA)	M 120-277 V 3 347 V ⁵	O3 ≤ 3 ft D3 ≤ 6 ft 12 ≤ 12 ft 25 ≤ 25 ft

³ Specify run length in 2' nominal increments.
Run lengths cannot be modified on site. Factory installed endcaps & joiners.

⁴ Integrated driver with mounting, power feed, suspension + canopy except for remote.

⁵ 347 V Driver for F1/F3, 347 V Transformer & Driver for E1-4/L1.

OPTIONS	ROW LAYOUT	SENSORS & CONTROLLERS
A Alternate Wiring (2nd circuit in 8 ft modules for EM/NL or pre-wired switching) B Battery Pack C Chicago Plenum H Emergency Switching (ETL or UL listed)	N Non-Power End F 4 ft End Module G 6 ft Modules ⁷	SE1 Canopy Integrated Enlighted Smart Sensor ⁸ RE1 Remote Enlighted Smart Sensor VN1 Acuity nLight Converter ⁹

⁷ BP & CTD available for 120-277 V in Grid (G), Structure (S) and Remote (R) settings.

⁸ For 12 ft & 18 ft rows.

⁹ For Enlighted in drywall settings, use Remote (R) ceiling option. (Enlighted with independent 2 Up (D) or 8 ft Alternate Wiring (A) requires 2 sensors per luminaire and only one can be canopy integrated (SE1).
⁸ For nLight in Drywall (D) and Structure (S) settings, contact Fluxwerx.

All rights reserved. © Fluxwerx Illumination 2021 604.545.9379 | fluxwerx.com
Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.fluxwerx.com for most current technical information.

PAGE 2 of 5
FD1x | 2021-03



Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: Plate Out Single 3449

Lamp / LED Driver: N/A

Type:


G1

PLATE OUT SINGLE 3449

PROJECT	PROJET
SPEC TYPE	
NOTES	



OPTIONS



ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL	MODELE	3449
3449	PLATE OUT SINGLE	
LIGHT SOURCE		
LED		
COLOR TEMPERATURE		
VOLTAGE		
DIMMING OPTION		
HOUSING		
WHITE		
ANTE		
BLUE		

PRODUCT CHARACTERISTICS

ADA	BIM	DIM	IES	LED	UL	+
DESIGN						
LIGHT SOURCE						
CONSTRUCTION						
DIFFUSER						
CERTIFIED						
CONCEPTION						
SOURCE LUMINEUSE						
CONSTRUCTION						
DIFFUSEUR						
CERTIFIE						

PLATE OUT 3449/3450

DESIGNED FOR CONÇU POUR IP65

ALUMINUM STRUCTURE

LED LIGHT ENGINE

MOUNTING FASTENERS

WEATHERPROOF

EASY INSTALLATION

MINIMALIST DESIGN

PIA'14

red dot award 2015

PRODUCT SPECIFICATION	3449 - REG	3449 - HO	3450 - REG	3450 - HO
PERFORMANCE				
SYSTEM WATTAGE	4.9 W	7.3 W	9.9 W	14.6 W
DELIVERED LUMENS (4000K)	294 LM	462 LM	751 LM	1204 LM
EFFICACY	60.4 LM/W	76.9 LM/W	76.9 LM/W	76.9 LM/W
OTHER INFORMATION				
LUMINAIRE'S WEIGHT	6.03 LBS / 2.97 KG	6.03 LBS / 2.97 KG	8.40 LBS / 3.84 KG	8.40 LBS / 3.84 KG
L70 (LUMEN MAINTENANCE)	> 60,000 HRS	> 60,000 HRS	> 60,000 HRS	> 60,000 HRS

EFFICACY MULTIPLIERS

LIGHT DISTRIBUTION

3449-REG 3449-HO 3450-REG 3450-HO

EUREKA

SPECIFICATION

Eureka Lighting © 2021

www.eurekalighting.com

V1.1-202109

EUREKA

TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

V1.0 — 2021.08

MO

Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

85 Sankaty Rd.

Nantucket, MA 02554

R1: 4/2/22

Fixture Model Number: STW Wet Location Step Light

Lamp / LED Driver: N/A

Type:

H1

STW
Wet Location LED Step Light

Product Description

NICOR's Wet Location LED Step Lights are a great compliment for your residential and commercial projects. Increases the safety of walkways, stairways, patios, and balconies. This step light not only provides safety, but it offers a warm, natural glow making it a perfect accent for any project. Created with Anti-microbial powder coat paint to hinder most bacteria. Available for indoor or outdoor use.

Construction

- Aluminum die-cast housing routes heat away from electrical components
- Vertical model designed for use in metallic and non-metallic 2" x 4" J-Boxes
- Horizontal model designed for use in non-metallic 2" x 4" J-Boxes
- Designed to have no visible hardware, and install flush to the surface

Optical System

- Diffuser creates uniform light distribution that reduces glare while maximizing lumen output

Electrical

- Custom slim driver minimizes installation width
- Input voltage of 120VAC, 60Hz
- Operating temperature of -4°F to 133°F (-20°C to 45°C)
- Horizontal model input power of 5.4W
- Vertical model input power of 3W

LED

- Available in 3000K CCT
- Life rated hours >50,000
- Utilizes high performing LEDs with 80 CRI
- Vertical model luminous flux of 35 lumens
- Horizontal model luminous flux of 75 lumens

Finish


- Powder coat finish available in white, black, or bronze
- Matte finish

Mounting and Installation

- Easy installation, mounting bracket included with fixture
- Wet location approved for indoor and outdoor use. Gasket pre-installed on fixture.
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

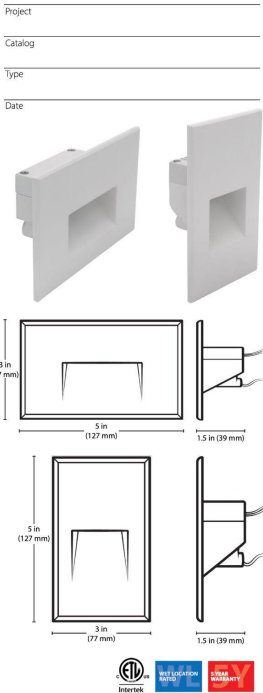

Ordering Information					
Series	Version	Voltage	CCT's	Orientation	Trim Color
STW	1	120 (120VAC)	3K (3000 K)	☐ H (Horizontal)	☐ BK (Black)
				☐ V (Vertical)	☐ BZ (Bronze)
					☐ WH (White)

NICOR, Inc. 2200 Midtown Place NE, Albuquerque, NM 87107 P: 800.821.6283 F: 800.892.8393
www.nicorlighting.com January 22, 2020 9:16 AM

NICOR **LED**

MO

Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

85 Sankaty Rd.
Nantucket, MA 02554

R1: 4/2/22