





2 BROAD STREET
NANTUCKET, MA 02554
(508) 228-2728
MARKCUTONE.COM

SURVEYOR


EARLE & SULLIVAN INC
6 YOUNGS WAY
NANTUCKET, MA 02554
(508) 332-4808

STRUCTURAL DESIGN


CAPE STRUCTURAL CONSULTANTS
P.O. BOX 798
FALMOUTH, MA 02541
(508) 457-6794

LIGHTING DESIGN


MAX OKST
103 OAKES STREET
PORT JEFFERSON, NY 11777
(631) 605-9525

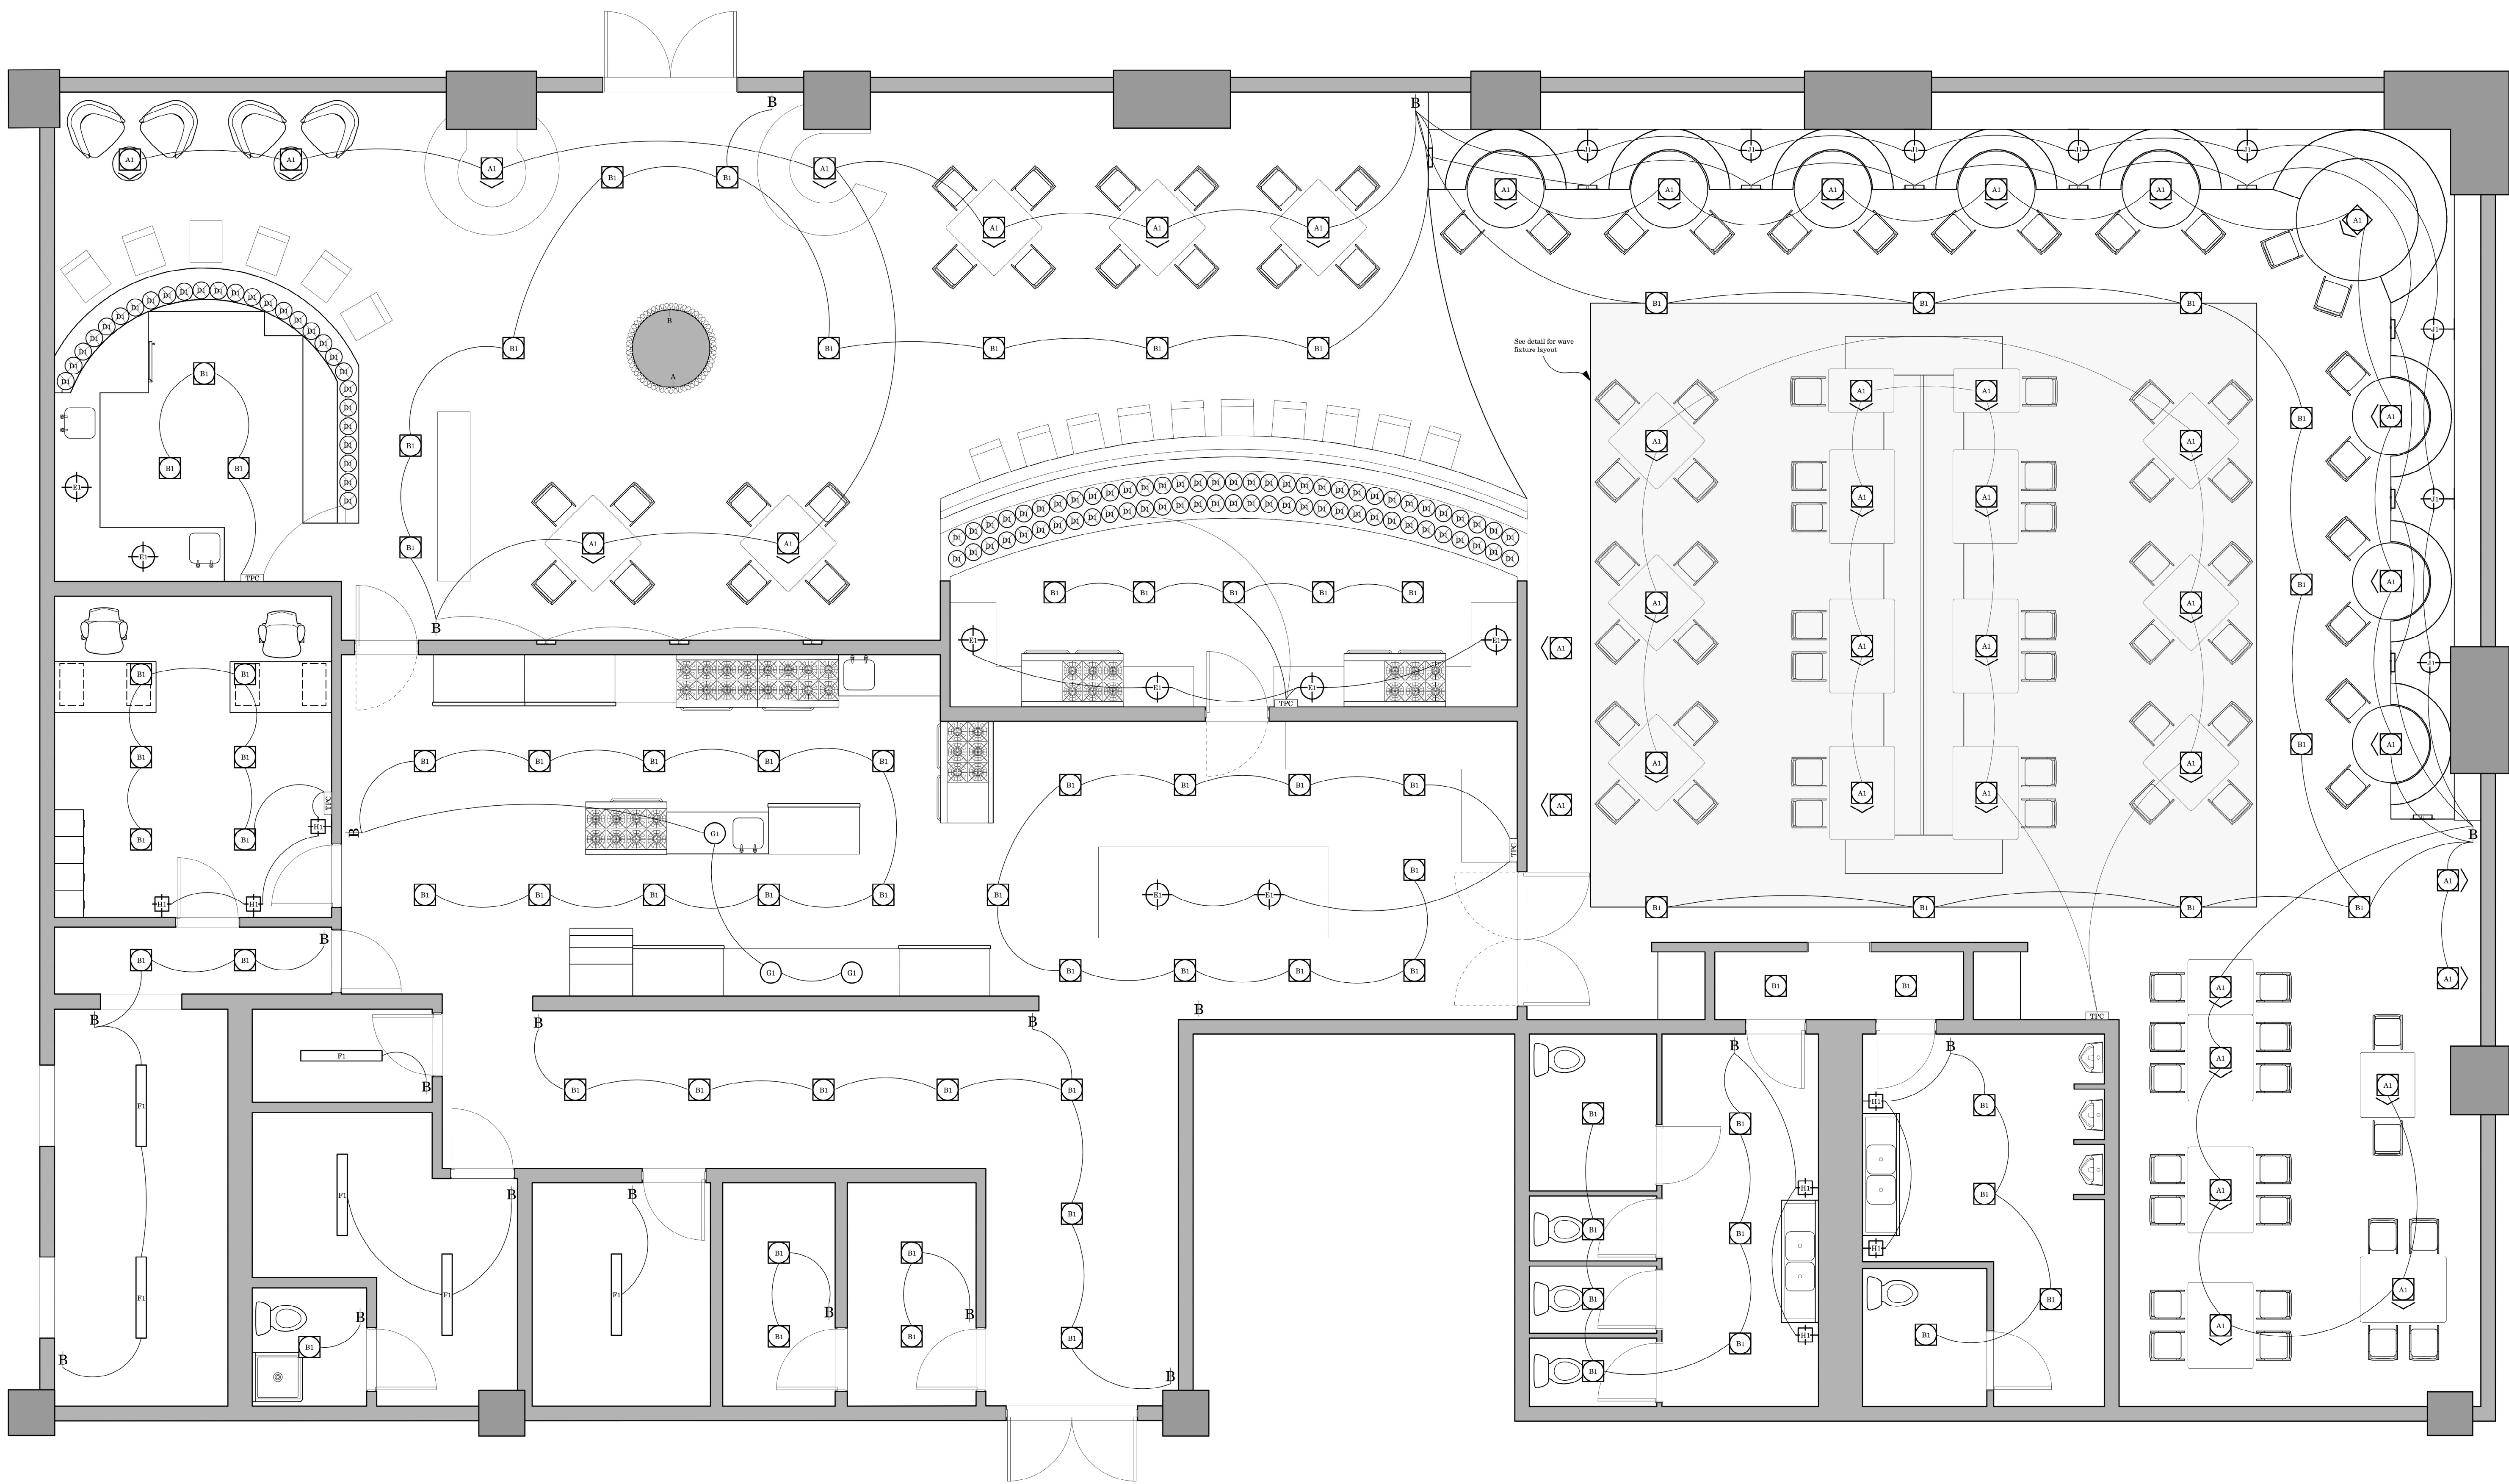

1 Bistro Plan
Scale: 1/4" = 1'-0"

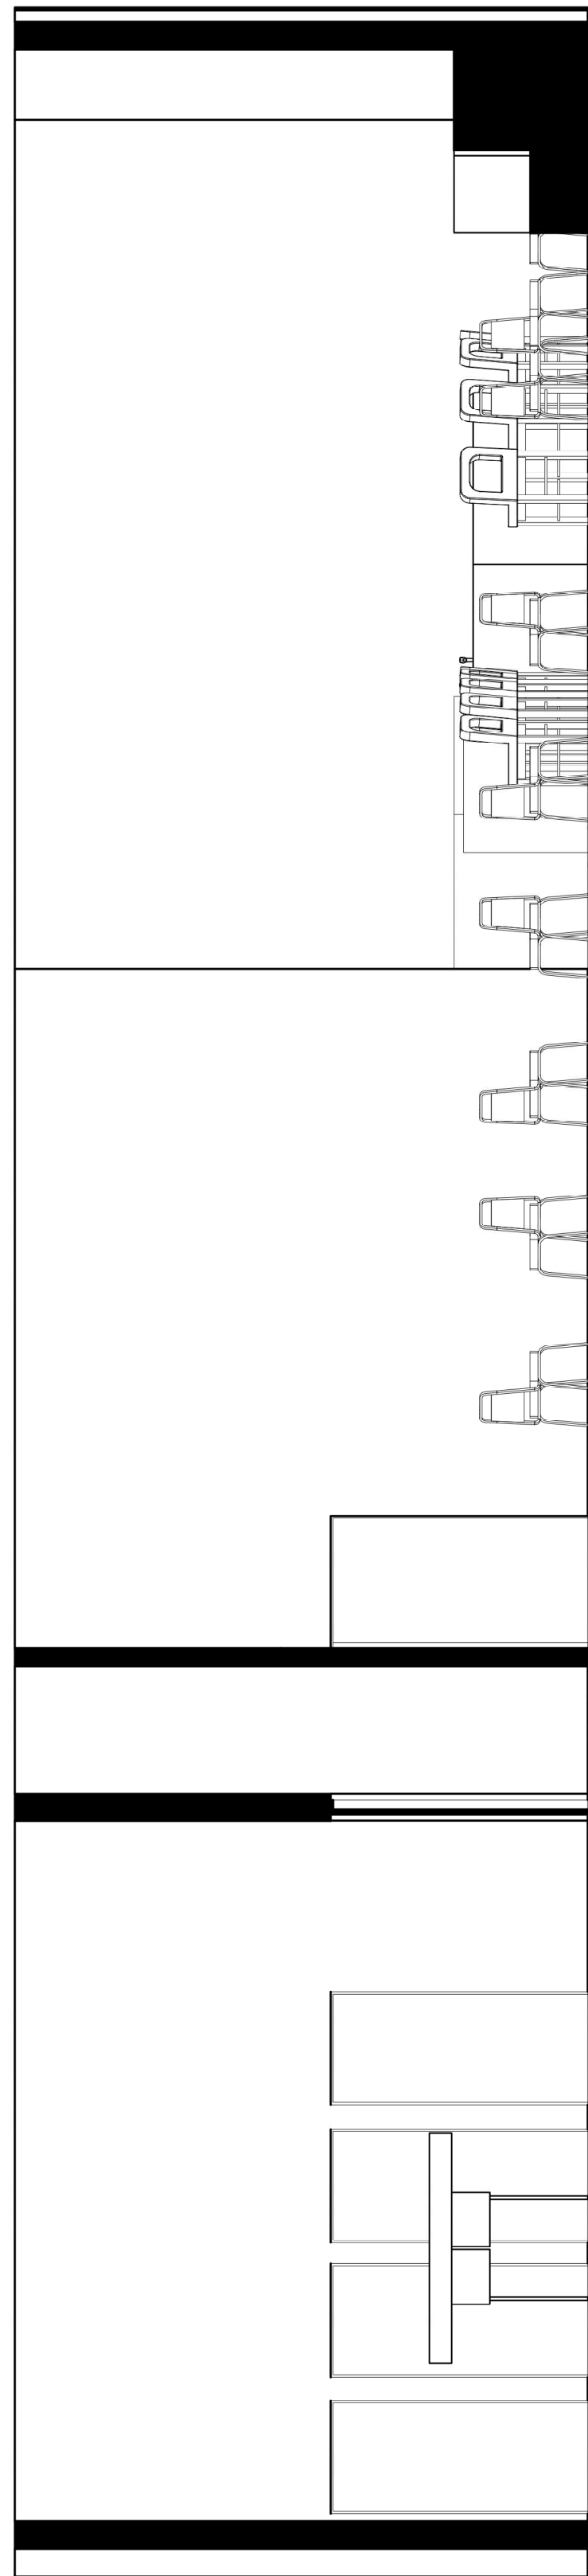

2 N-S Section
Scale: 1/4" = 1'-0"

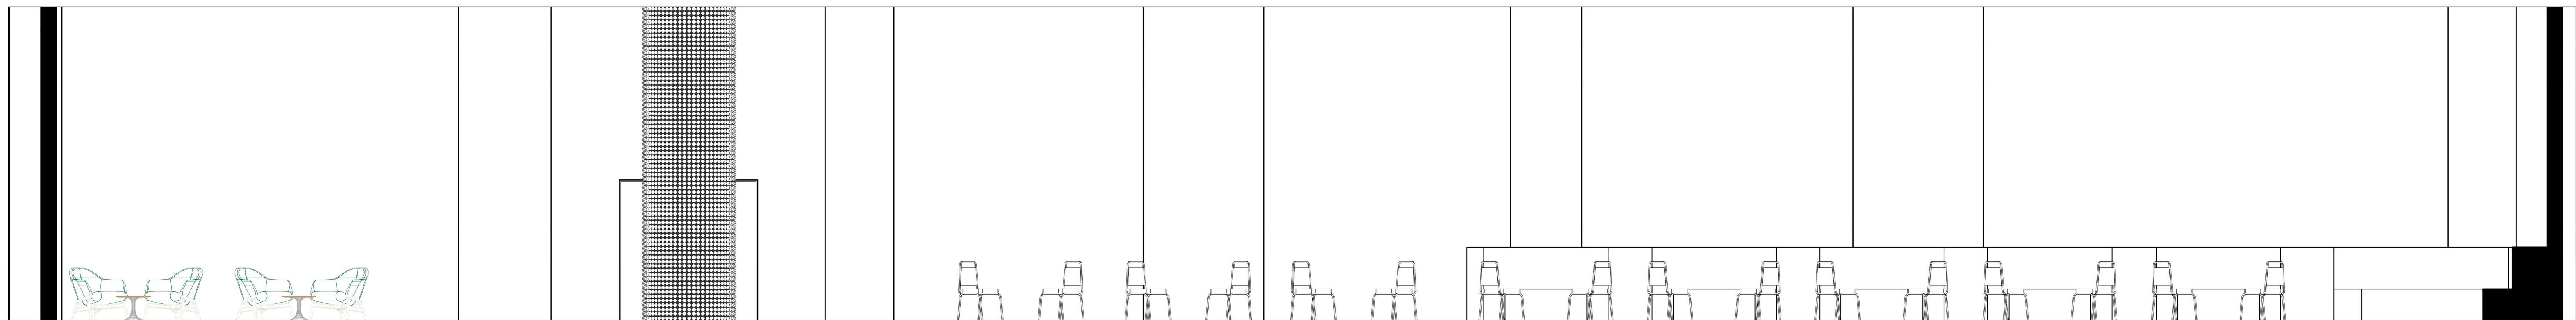

3 E-W Section
Scale: 1/4" = 1'-0"

- A1 - Recessed Adjustable Downlight
- B1 - Recessed Downlight
- C1 - Column Bulb
- D1 - Wave Bulb
- E1 - Task Pendant Small
- F1 - Fluorescent
- G1 - Recessed Downlight
- H1 - Interior Sconce
- I1 - Recessed Wall
- J1 - Decorative Sconce
- B - ETC Mosaic Button Station
- ETC - ETC Mosaic Tessera Panel Controller

General Notes


- All circuited fixtures require home run to panel.
- ETC Mosaic Controller needed to run ETC Button Stations and ETC Tessera Panels.
- All ETC Button Stations require home run to Mosaic Controller.
- All ETC Tessera Panels require home run to Mosaic Controller.
- All D1 fixtures require home run to panel or to control unit/dimmer.
- All D1 fixtures are dimmable and are to be pixel mapped in ETC Mosaic Controller.

17 April 2022

THE EDISON:
AN AMERICAN BISTRO

ROAD
NANTUCKET, MA 02554
PARCEL:

BISTRO
GROUND PLAN

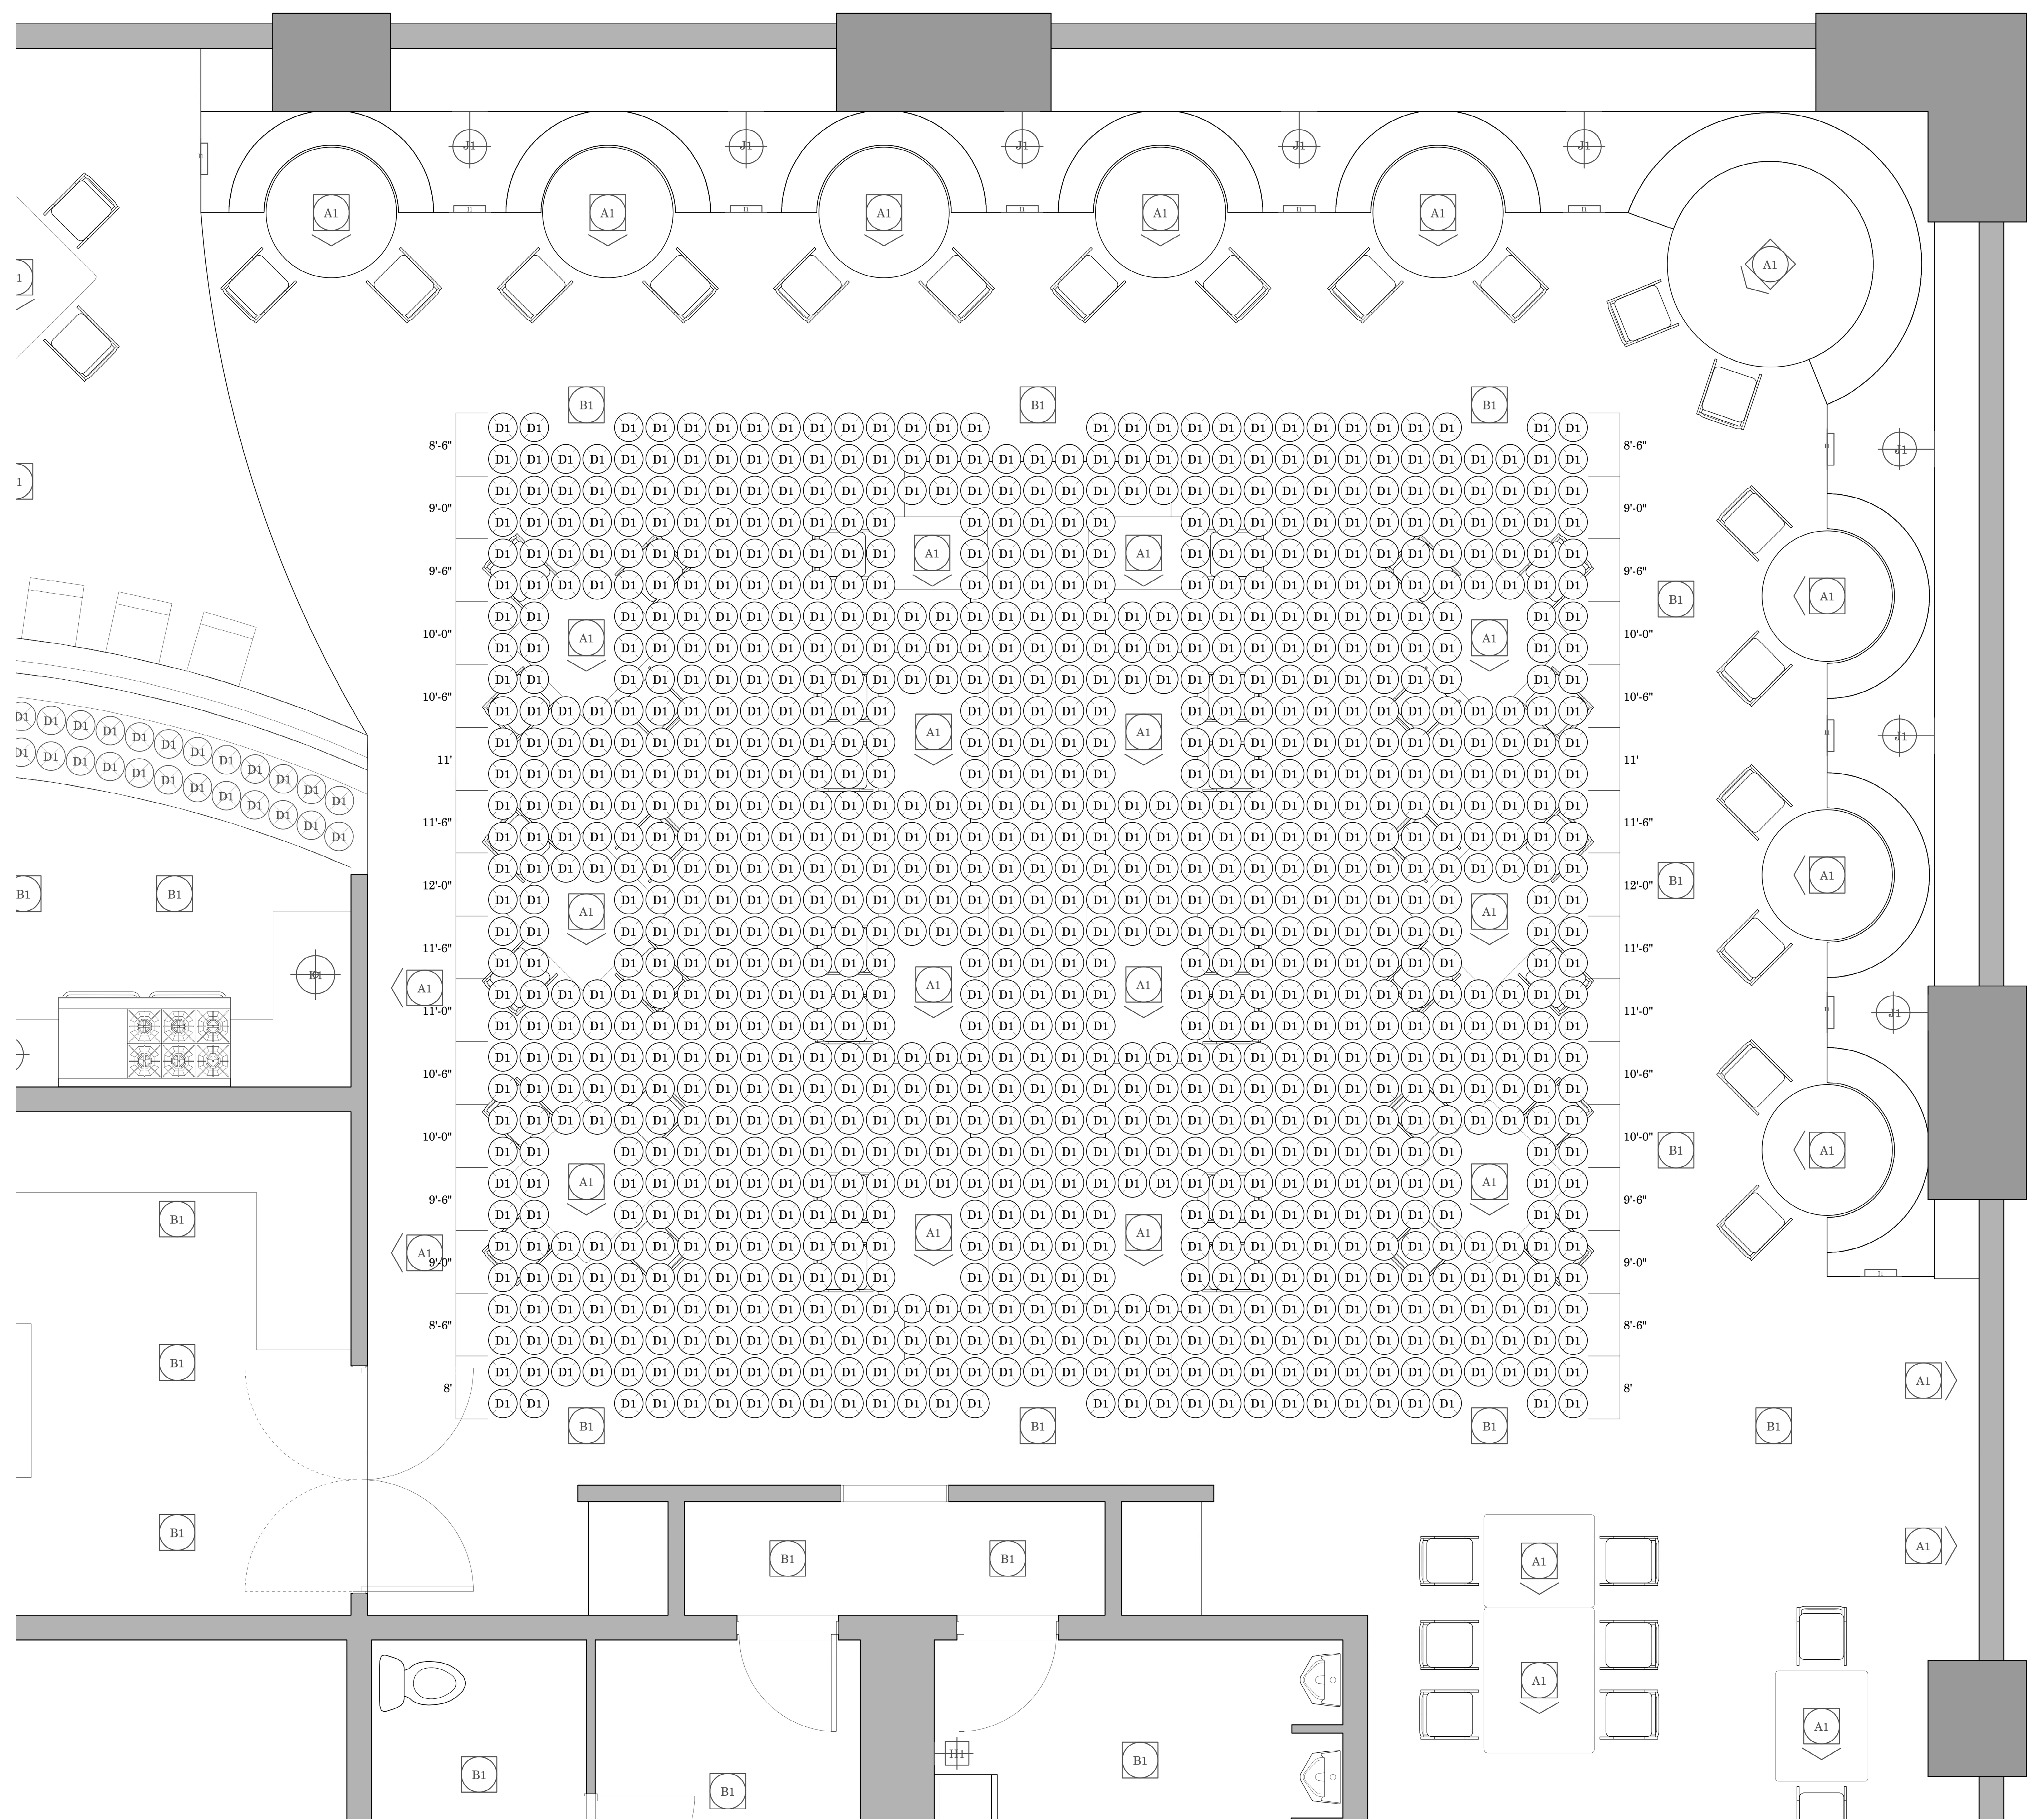

General Notes

- All D1 fixtures require home run to panel or to control unit/dimmer.
- All D1 fixtures are dimmable and are to be pixel mapped in ETC Mosaic Controller.
- All dimentions display the height from the bottom of the group of fixtures to the ground.



2 BROAD STREET
NANTUCKET, MA 02554
(508) 228-2728
MARKCUTONE.COM

SURVEYOR

EARLE & SULLIVAN INC
6 YOUNGS WAY
NANTUCKET, MA 02541
(508) 332-4808

STRUCTURAL DESIGN

CAPE STRUCTURAL CONSULTANTS
P.O. BOX 798
FALMOUTH, NY 02541
(508) 457-6794

LIGHTING DESIGN

MAX OKST
103 OAKES STREET
PORT JEFFERSON, NY 11777
(631) 605-9525

	A1 - Recessed Adjustable Downlight
	B1 - Recessed Downlight
	C1 - Column Bulb
	D1 - Wave Bulb
	E1 - Task Pendant Small
	F1 - Fluorescent
	G1 - Recessed Downlight
	H1 - Interior Sconce
	I1 - Recessed Wall
	J1 - Decorative Sconce
	B - ETC Mosaic Button Station
	ETC Mosaic Tessera Panel Controller

1 Dining Room Wave Detail
Scale: 1/2" = 1'-0"

17 April 2022

THE EDISON:
AN AMERICAN BISTRO

ROAD
NANTUCKET, MA 02554
PARCEL:

BISTRO DINING ROOM
WAVE DETAIL

B1



2 BROAD STREET
NANTUCKET, MA 02554
(508) 228-2728
MARKCUTONE.COM

SURVEYOR

EARLE & SULLIVAN INC
6 YOUNGS WAY
NANTUCKET, MA 02554
(508) 332-4808

STRUCTURAL DESIGN

CAPE STRUCTURAL CONSULTANTS
P.O. BOX 798
FALMOUTH, MA 02541
(508) 457-6794

LIGHTING DESIGN

MAX OKST
103 OAKES STREET
PORT JEFFERSON, NY 11777
(631) 605-9525


	A1 - Recessed Adjustable Downlight
	B1 - Recessed Downlight
	C1 - Column Bulb
	D1 - Wave Bulb
	E1 - Task Pendant Small
	F1 - Fluorescent
	G1 - Recessed Downlight
	H1 - Interior Sconce
	I1 - Recessed Wall
	J1 - Decorative Sconce
	ETC Mosaic Button Station
	ETC Mosaic Tessera Panel Controller

17 April 2022

THE EDISON:
AN AMERICAN BISTRO

ROAD
NANTUCKET, MA 02554
PARCEL:


BISTRO ENTRANCE
COLUMN DETAIL

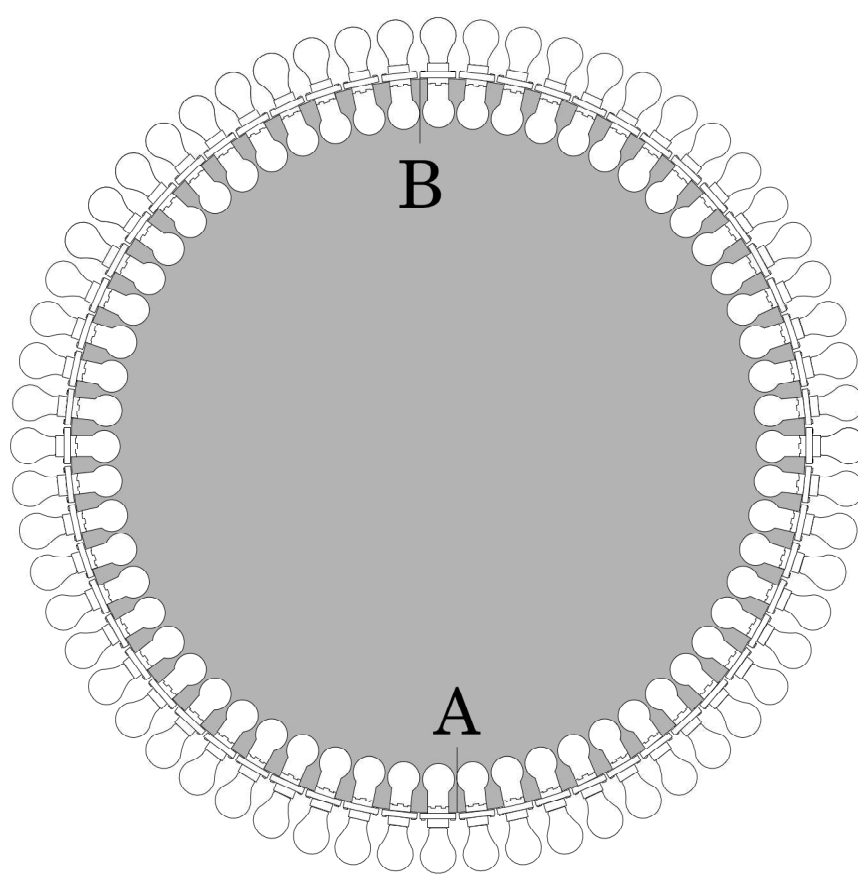


5 Column Top Section
Scale: 1" = 1'-0"

General Notes


- All C1 fixtures require home run to panel or to controll unit/dimmer.
- All C1 fixtures are dimmable and are to be pixel mapped in ETC Mosaic Controller.

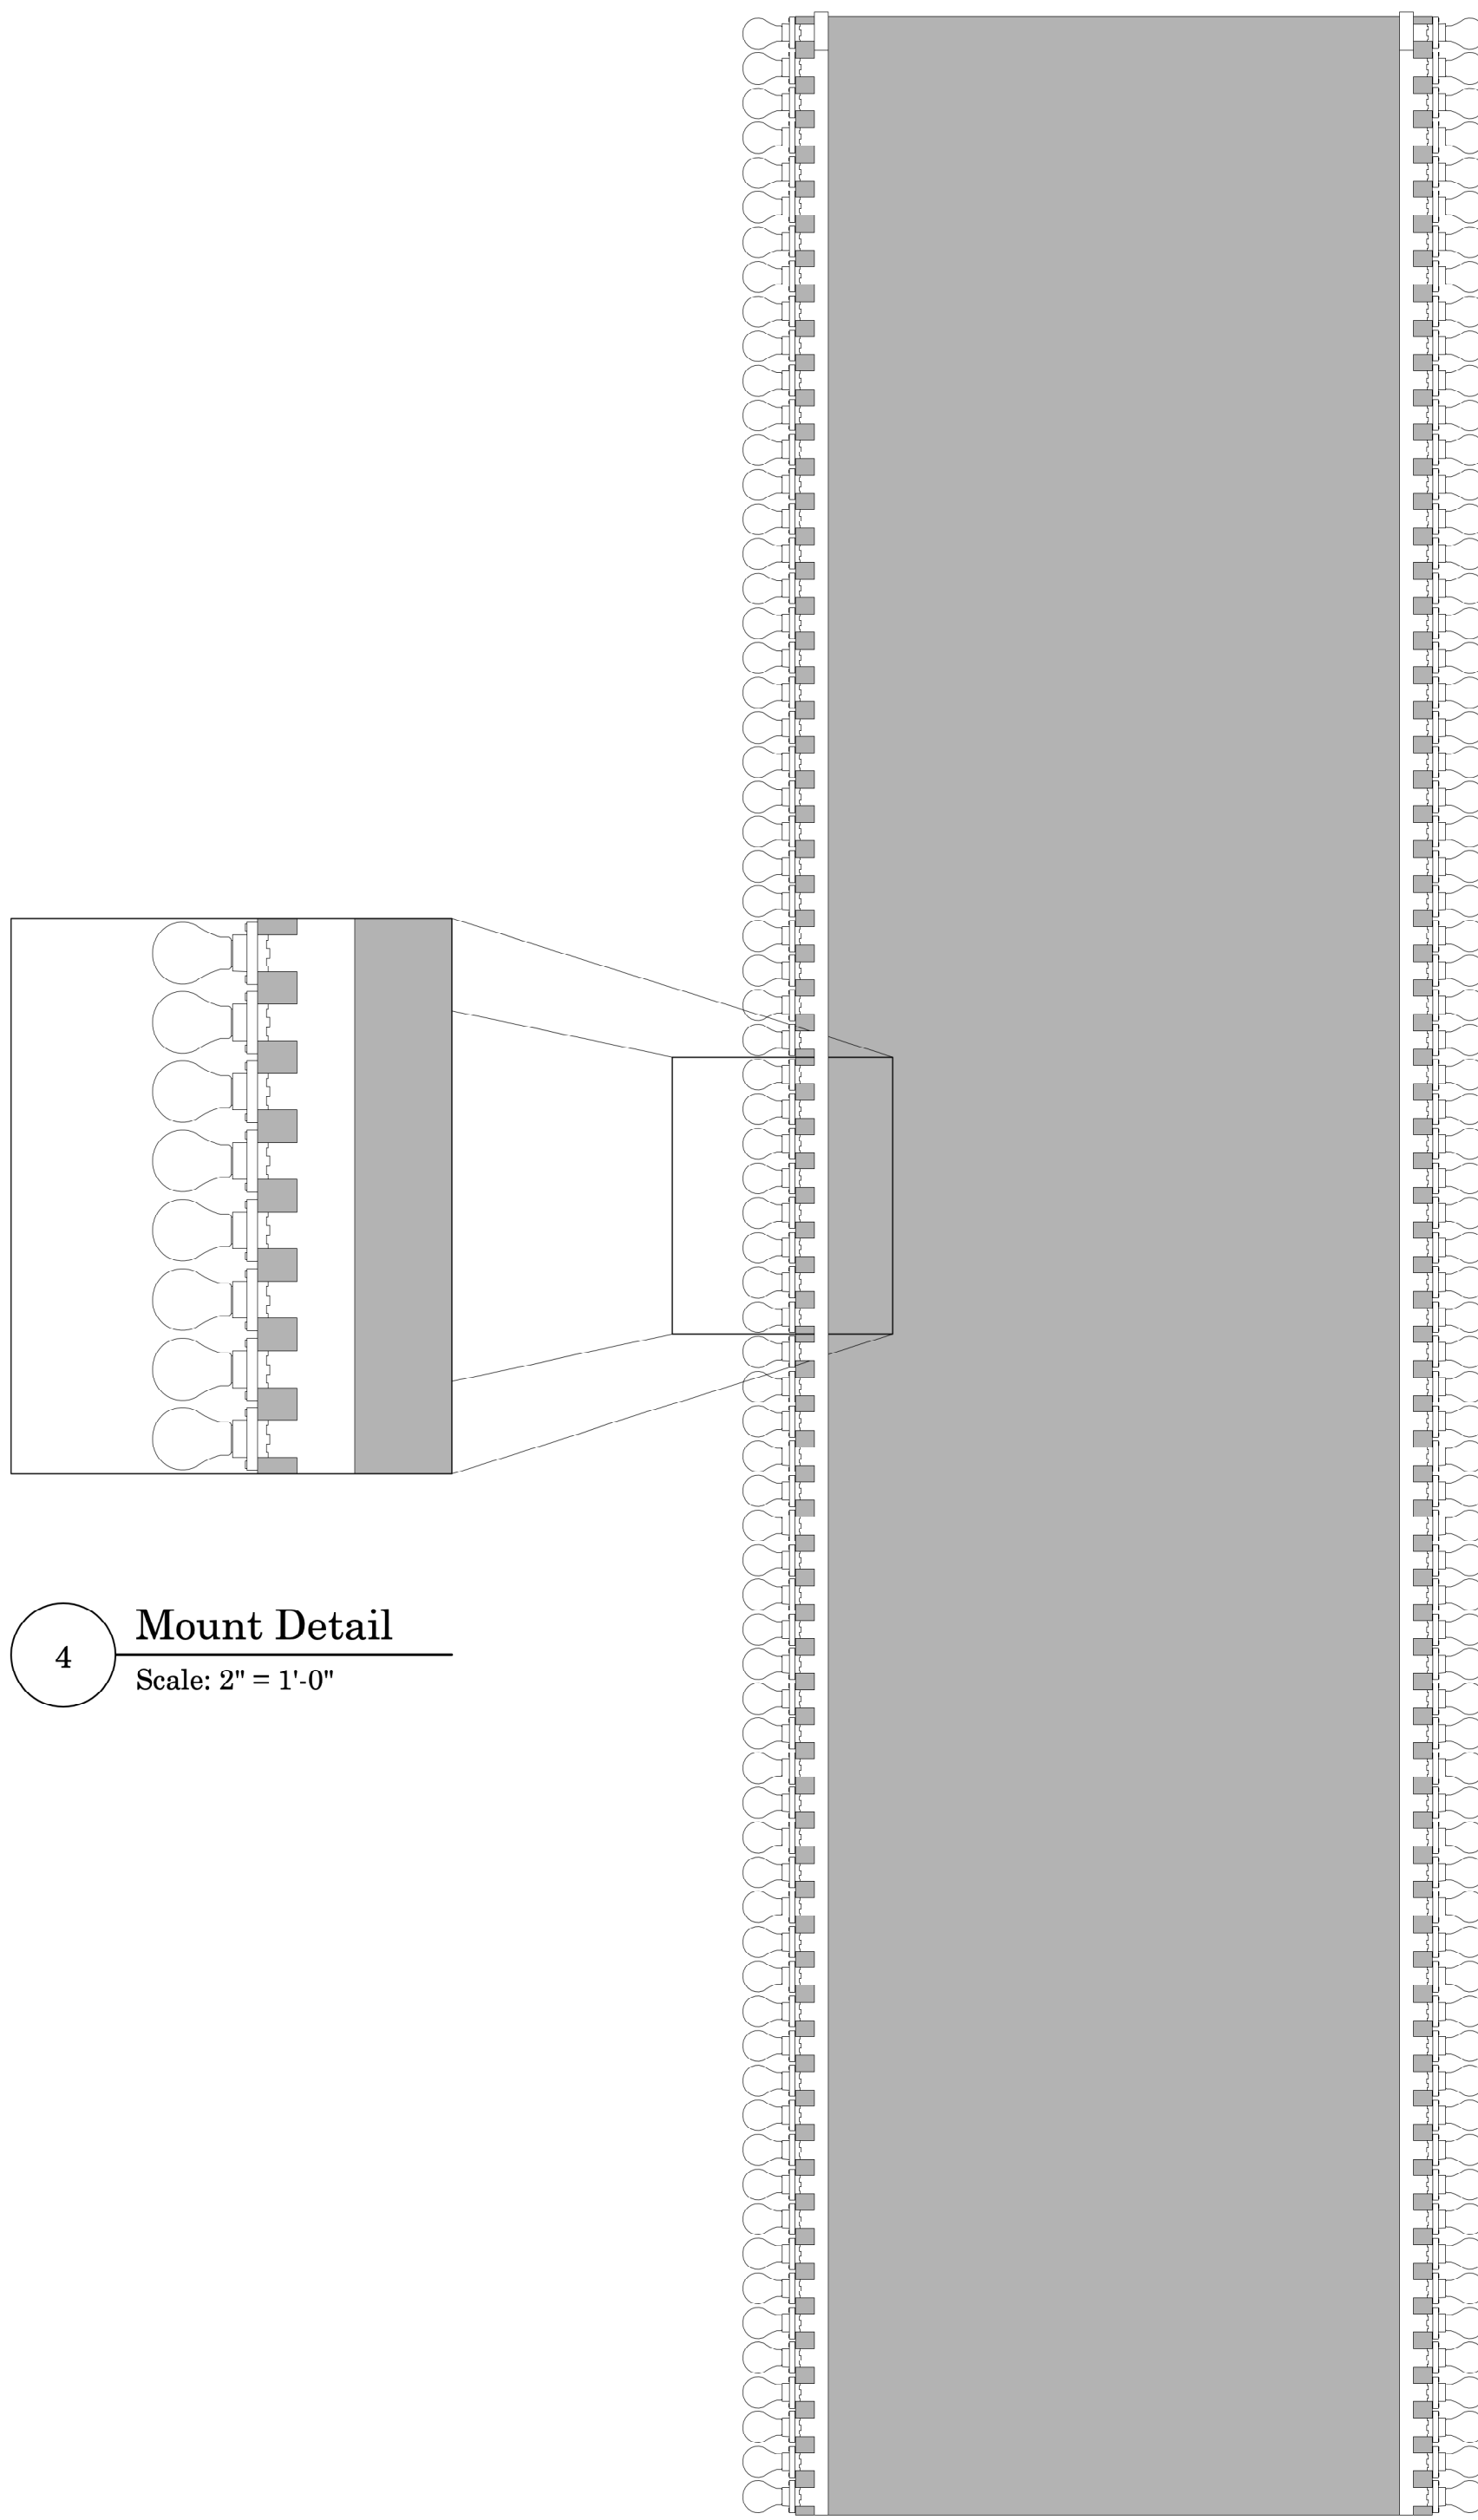

4 Mount Detail
Scale: 2" = 1'-0"

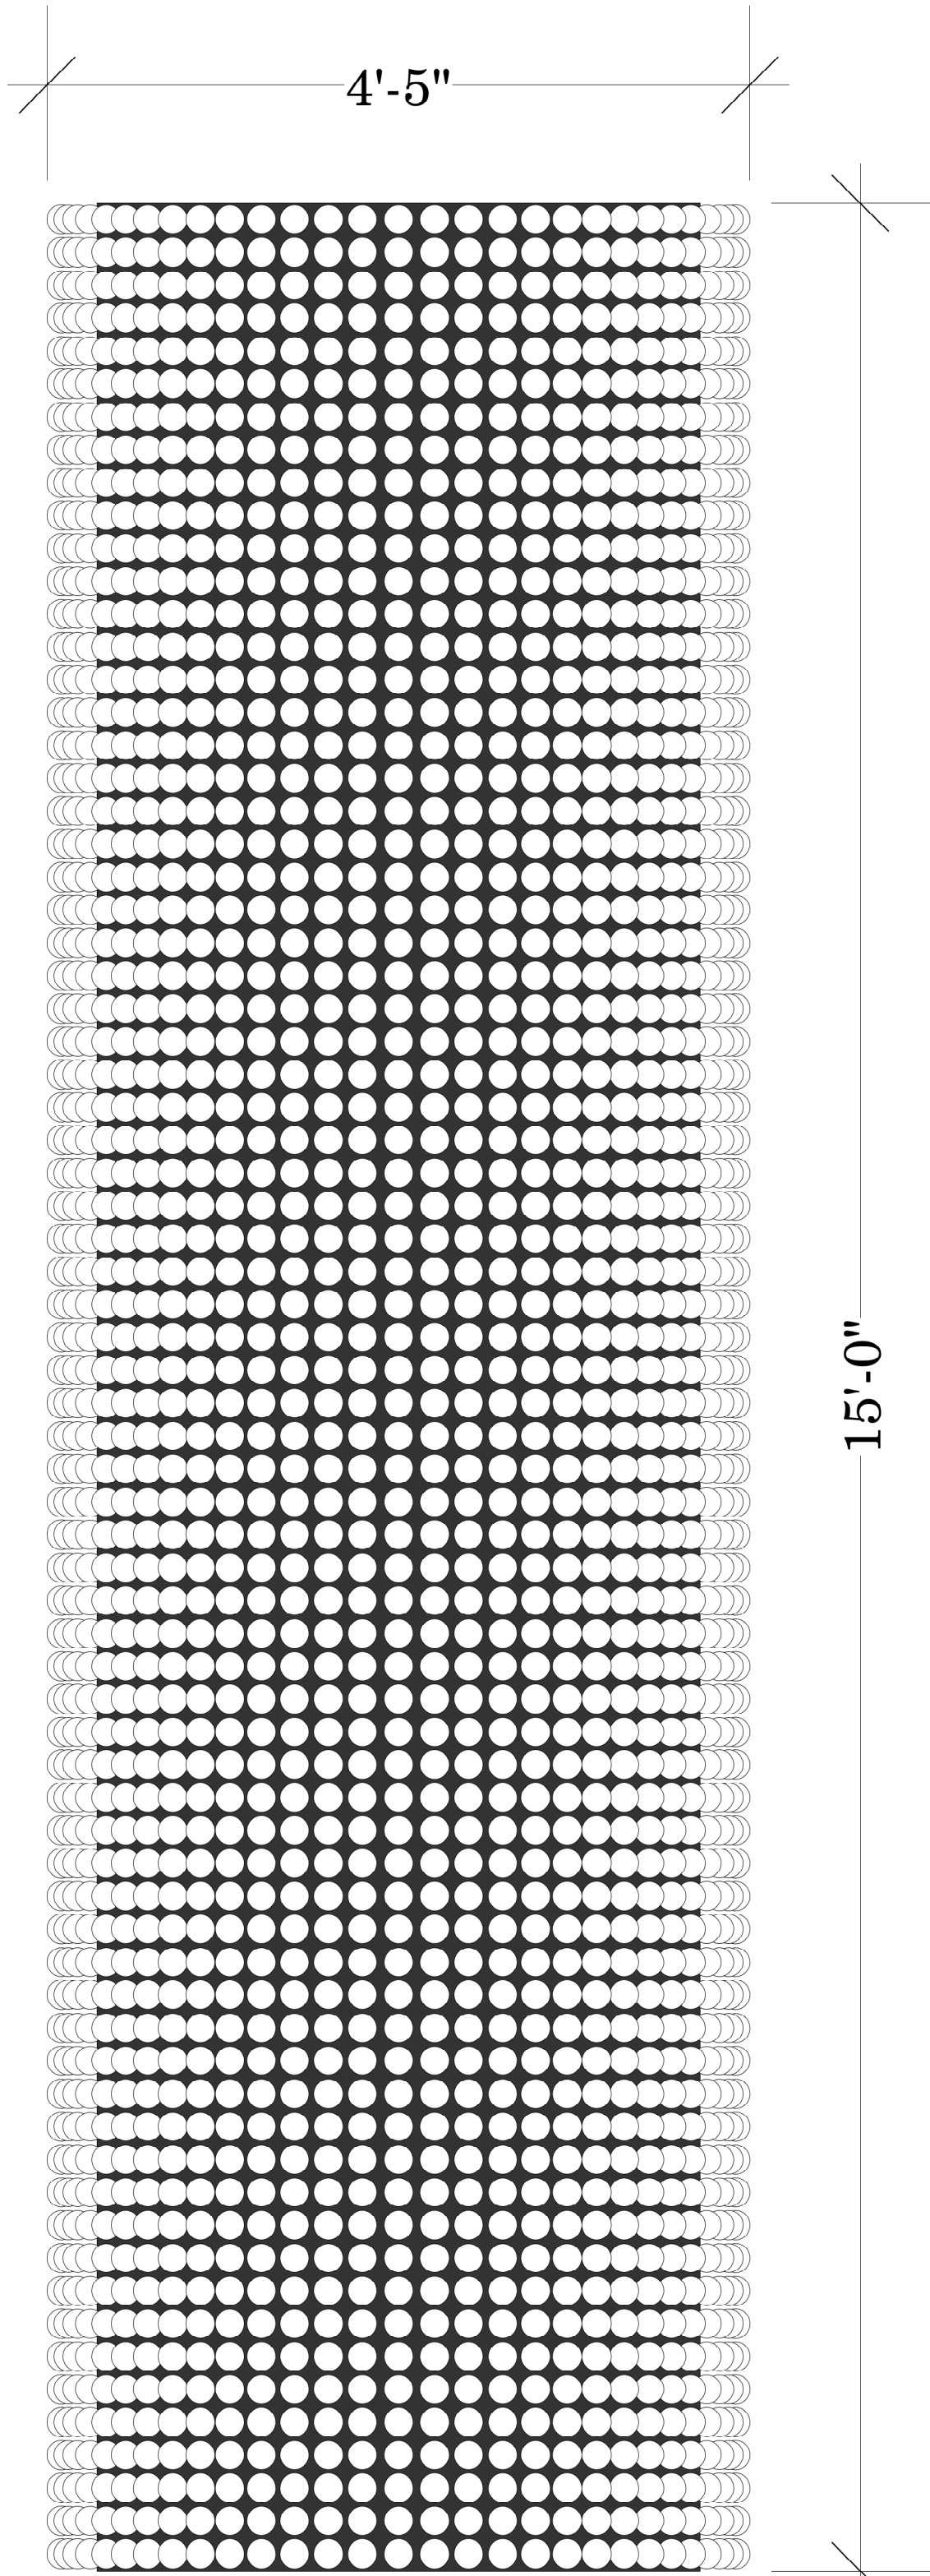

2 Column Front View
Scale: 1" = 1'-0"

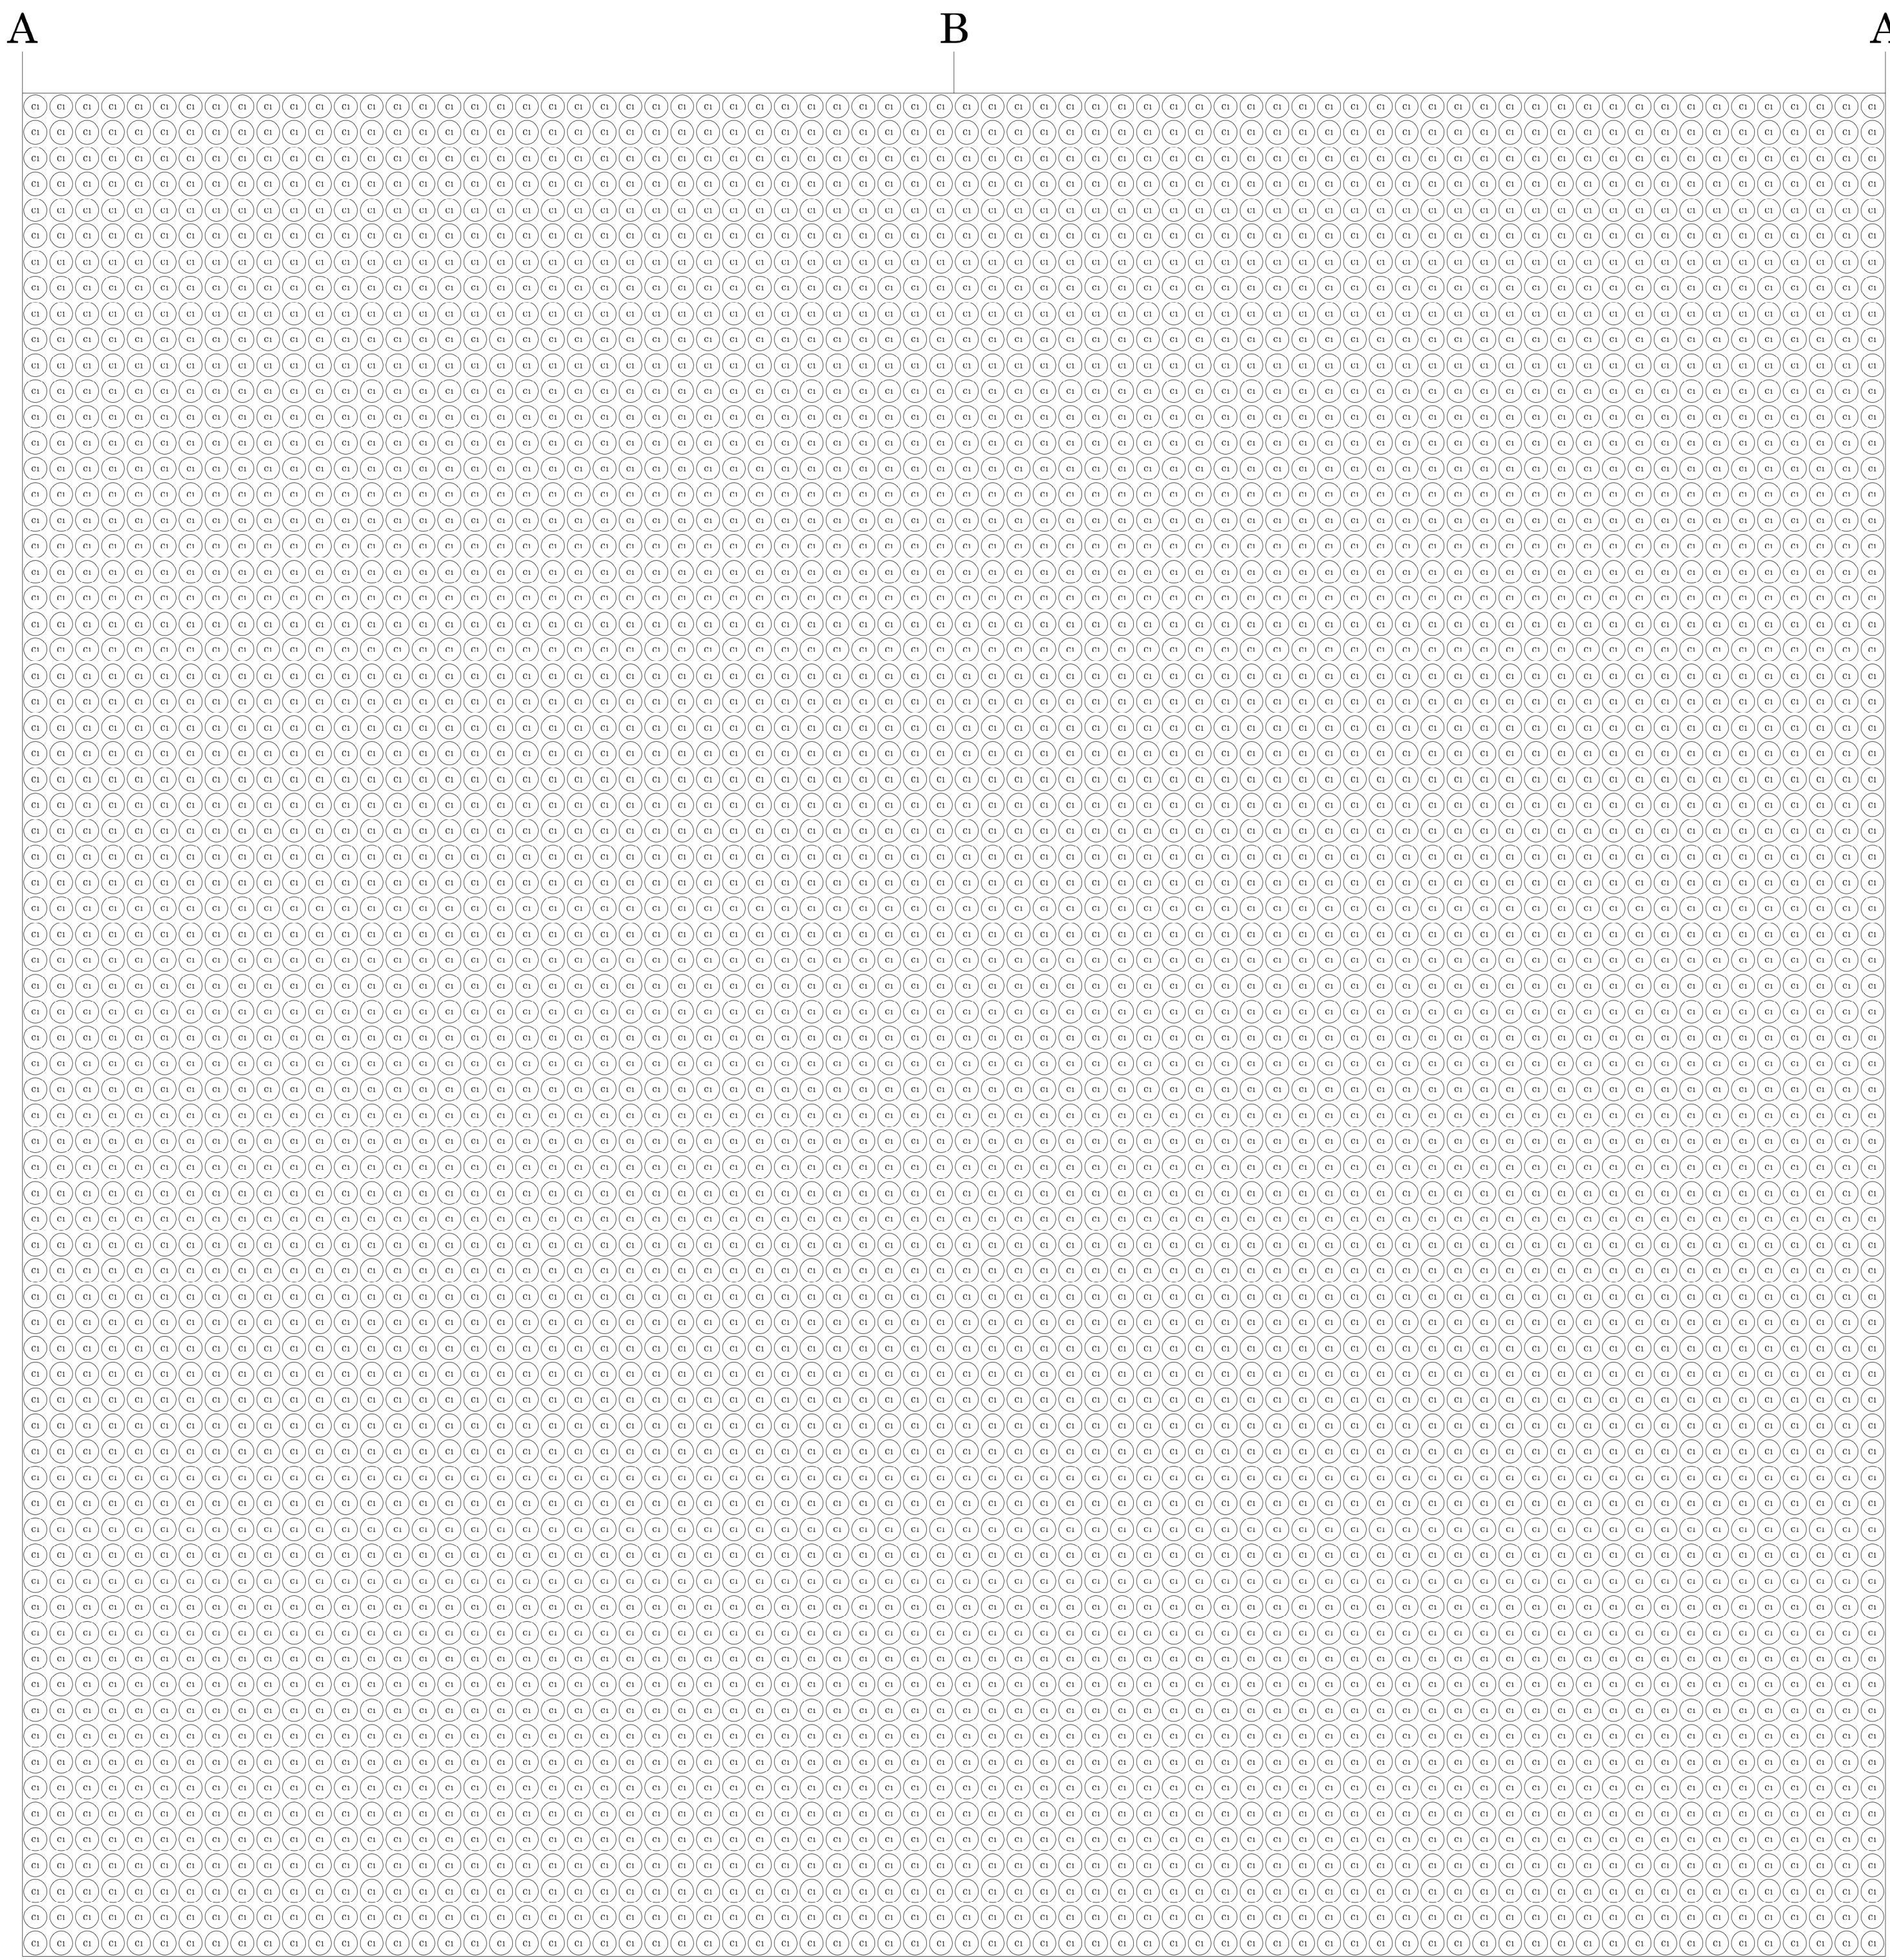

1 Column Bulb Layout
Scale: 1" = 1'-0"



Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Fixture Schedule

The Edison:
An American Bistro

R1: 4/2/22

Type	Manufacturer	Description / Catalogue Number	Lamp / Driver	Volts	Mounting	Notes
A1	EUREKA	Focus 4547 Order Spec: 4547-LED.25-30-15-120V-DP-RC-BLKE-BLKE-3983	120V Phase Dimming	120v	Ceiling Mount	
B1	EUREKA	1112AD Order Spec: 1112AD-BLK-FRO-LED.11-30-40-1604C-9.35.4-1911A	4W, EUREKA LED Module	120v	Recessed Ceiling	
C1	LEVITON	Leviton 9878 UPC Code: 07847719967	LED Edison 2100k	120v	See Detail	
D1	EUREKA	Aliver 4020-MCC Order Spec: 4020-MCC-INC.60-120V-C-**-RC-BLK-BLK-BLK-3983 ** Contact rep for exact lengths	LED Edison 2100k	120v	Ceiling Mount	
E1	EUREKA	SLIM STACK 2036 Order Spec: 2036-GZ10.50-120V-S6-36-RC-BLK-BLK-BLK	MR16	120v	Suspended Accent	
F1	A.LIGHT	ACCOLADE D5 Order Spec: D5-4-IT-LS-30-90-U-HE-G-W-D-EC	L2 - Lutron Hi-Lume 1% 2-Wire 120v	120v	Suspended Accent	
G1	EUREKA	1112AD Order Spec: 1112AD-BLK-FRO-LED.11-40-40-1604C-9.35.4-1911A	4W, EUREKA LED Module	120v	Recessed Ceiling	



Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Fixture Schedule

The Edison:
An American Bistro

R1: 4/2/22

H1	EUREKA	PLATE OUT SINGLE 3449 Order Spec: 3449-LED-30-120V-DV-BLKE	N/A	120v	Wall Mount	
I1	EUREKA	NOVA 3300 Order Spec: 3300-LED.1-30-120V-MG-SA	N/A	120v	Wall Mount	
J1	EUREKA	SCOUT 3049 Order Spec: 3049-10-LED-30-90-120V-DP-ME-FRO-BLKE-BLKE-3983	N/A	120v	Wall Mount	

Fixture Manufacturer: EUREKA

Fixture Model Number: Focus 4547


Spec Sheets Folder

Type:

A1

FOCUS 4547

PROJECT / PROJET
SPEC TYPE
NOTES




ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL / MODELE	4547 FOCUS	4547
LIGHT SOURCE / SOURCE LUMINEUSE		
COUPLER / COUPLER TYPE / OTHER INFO		
LED 18	18W LED	
LED 25	25W LED	
COLOR TEMPERATURE / TEMPERATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
BEAM ANGLE / ANGLE DE FAISCEAU		
15	15°	
38	38°	
55	55°	
VOLTAGE / TENSION		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION / OPTION DE GRADATION		
0V	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
MOUNTING / MONTAGE		
IC	ROUND CANOPY / PAVILLON ROND	
IC-IC	FOR NON-IC INSTALLATION: 0.5\"/>	
STRUCTURE FINISH / FIN DE STRUCTURE		
BLUE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH / FIN DE L'ÉCRAN		
BLUE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
ACCESSORY / ACCESSoire		
3983	DEEP JUNCTION BOX (PROVIDED WITH 240IC CANOPY)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM	DIM	IES	LED	0-10V	4
DESIGN:	Focus is simply the most powerful spotlight designed by Eureka! This performance is achieved through the combination of a clever heatsink construction, a high quality LED and an efficient reflector.				
INSTALLATION:	Focus is mounted on a round deep junction box for wall or ceiling installation and is designed with a friction swivel. It is assembled on a deep junction box (included) with integrated LED driver.				
LIGHT SOURCE:	18W or 25W Chip-on-board COB providing an impressive output of more than 2500 delivered lumens. Available with phase or 0-10V dimming.				
STRUCTURE:	The custom built heatsink was designed with hidden fins and an airflow channel that forces heat to smoothly navigate up to the top fins that are exposed to ambient air. Available with black or white architectural grade fine textured finish.				
REFLECTOR:	Aluminum reflector with an impressive efficiency of 90% available with 15°, 38° or 55° beam angle (FWHM).				
CERTIFIED:	c-USA-us				
CONCEPTION:	Focus est tout simplement le projecteur le plus puissant conçu par Eureka! Cette performance est possible en combinant un dissipateur thermique brillamment conçu, une DEL haute qualité et un réflecteur efficace.				
INSTALLATION:	Focus est monté sur un pavillon rond pouvant être installé au mur ou au plafond et il est conçu avec un pivot à friction. Il est assemblé sur une boîte de jonction profonde (incluse) avec une unité d'alimentation DEL intégrée.				
SOURCE LUMINEUSE:	DEL au type «Chip-on-board» (COB) de 18W ou 25W offrant un flux lumineux impressionnant de plus de 2500 lumens réels. Compatible avec gradateurs phase ou 0-10V.				
STRUCTURE:	Le radiateur esthétique intègre des ailettes dissimulées et un canal de ventilation, qui dirige la chaleur vers la section supérieure exposée à l'air ambiant. Offert avec finition architecturale finement texturée noire ou blanche.				
REFLECTEUR:	Fait d'aluminium et d'une efficacité impressionnante de 90%, il est offert avec un angle de faisceau de 15°, 38° ou 55° (FWHM).				
CERTIFIÉ:	c-USA-us				

ANATOMY

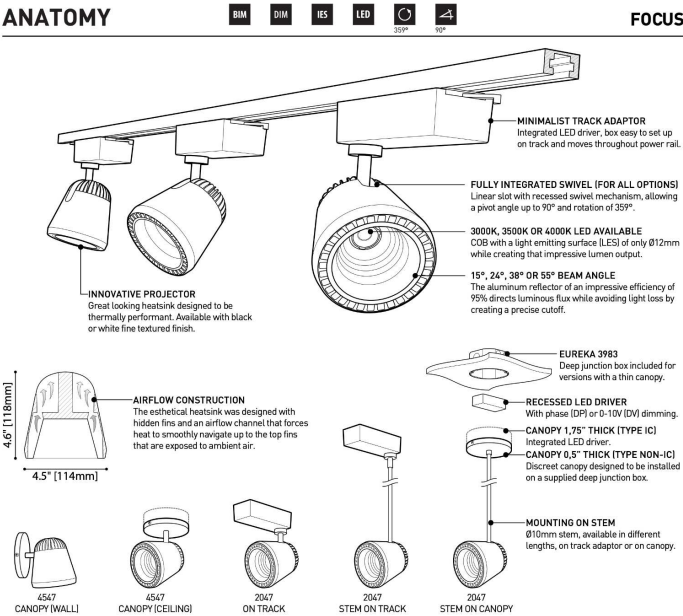

SPECIFICATIONS	LED 18W	LED 25W
LIGHT SOURCE	1 x COB LED - System Wattage 21.3W Total	1 x COB LED - System Wattage 30.6W Total
LUMENS (DELIVERED)	2177 lumens (102lm/W)	2803 lumens (92lm/W)
CRI	83 CRI (typical)	
CCT	4000K 3-step MacAdam Ellipse binning	
HEATSINK	Custom diecast aluminum, black or white fine textured finish	
LIGHT DISTRIBUTION	Directional projector (2047 and 4547)	
REFLECTOR	Aluminum, FWHM 15°, 24°, 38° or 55°	
LED DRIVER	Constant Current 500mA, UL Recognized	Constant Current 700mA, UL Recognized
DIMMING (VOLTAGE)	Phase dimming (DPI) 120V or 0-10V dimming (DVI) 120-277V	
LM-79	Upon request	
WARRANTY	5 years	



Max Okst Lighting Design

MO

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Manufacturer: LEVITON

Fixture Model Number: 9878

Spec Sheets Folder

Type:

C1




Leviton 9878

UPC Code: 07847719967


Country of Origin: China
Description

Incandescent lampholder, keyless, porcelain, medium base, 660W
- 600V, white.

CAT. 9878
Side view

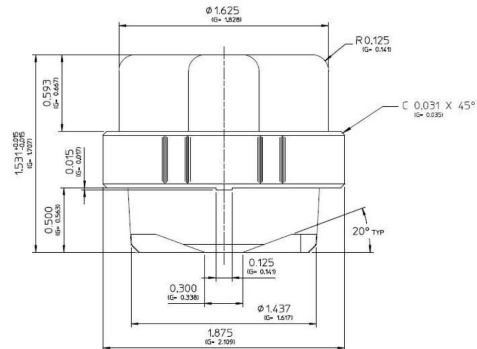

CAT. 9878
Top View

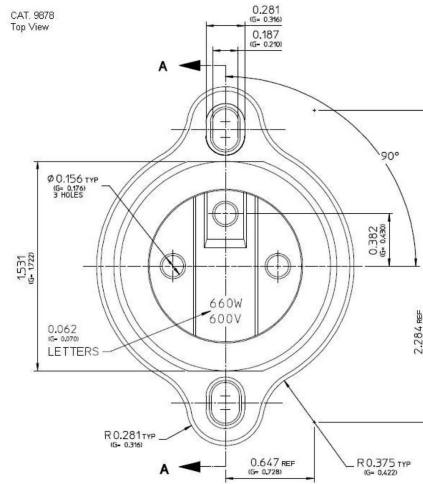

MO

Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Manufacturer: EUREKA


Fixture Model Number: Aliver 4020-MCC

Type:

Spec Sheets Folder

D1

ANATOMY

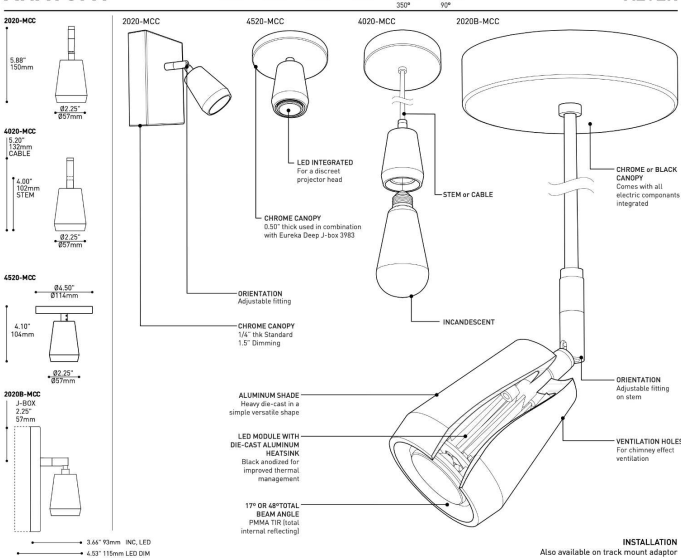

SPECIFICATIONS

LED

4 x 4 powered LEDs on MCPCB - total ±4 w
UL recognized - made in USA
330 lm - 350 lm (4000K)
80 CRI (typical)
Die-cast aluminum
Black anodized aluminum
Directional projector (2020B) / Direct (4020)
Total Internal Reflection (TIR) of 17° & 48° beam angle
120V (DP) or 120-277V (DV or non-dimming)
Constant Current driver 350 mA, UL Recognized
Phase Dimming (DP) and 0-10V Dimming (DV)
On request
5 years [on electronic components]
CSA recognized

INCANDESCENT

Inc Medium Base - 60W
N/A
N/A
N/A
N/A
N/A
120V
Dimmable

Also available on track mount adaptor



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1M4
Tel: +1 514 395 5215 Fax: +1 514 395 4169
www.eurekalighting.com



2020-MCC 4020-MCC
2020B-MCC 4520-MCC

Eureka Lighting ©2017

www.eurekalighting.com

V2.0-201705

ALVER 4020-MCC

PROJECT PROJECT

SPEC TYPE

NOTES




OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC. TRACK	LED TRACK	LED*	INC. LED*	LED DIM*
MOUNTING	270H	270H	240C	240E	240G
STEM	42.47"	41.18"	42.23"	42.23"	42.98"
CABLE	62.23"	46.46"	61.50"	46.46"	61.50"

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

MOUNTING OPTIONS	OPTIONS DE MONTAGE
270H	270H
240C	240C
240E	240E
240G	240G

STEM OPTIONS OPTIONS DE TIGE



Eureka Lighting © 2017

ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4020-MCC	4020-MCC
4020-MCC	ALVER (SUSPENDED)	
LIGHT SOURCE SOURCE LUMINEUSE		
OPTIONAL LAMP TYPE (OTHER INFO)		
INC. 60	60W, INC. A19 / B10 / G30 / HAL T10, MEDIUM BASE (220V ONLY)	
LED 4	4W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
30	3000K	
35	3500K	
40	4000K	
ANGLE BEAM ANGLE DE FAISCEAU		
FOR LED ONLY		
17	17°	
48	48°	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
	*NOT AVAILABLE WITH A TRACK ADAPTOR	
DIMMING OPTION OPTION DE DIMENSIONNEMENT		
FOR LED ONLY		
DV*	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
	*NOT AVAILABLE WITH A TRACK ADAPTOR	
STEM OR CABLE TIGE OU CÂBLE		
17	1/4" (6MM) STEM, FIELD ADJUSTABLE	
C	CLEAR CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CÂBLE		
36	36" STEM (STD LENGTH)	
60	60" CABLE (STD LENGTH)	
**	CUSTOM STEM LENGTH* (PLEASE SPECIFY)**	
**	CUSTOM CABLE LENGTH* (PLEASE SPECIFY)**	
	*FOR OVERALL HEIGHT PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
	**CABLE ACCESSORY PROVIDED FOR 1/4" (6MM) STEM OR CABLE 1/2"	
MOUNTING MONTAGE		
RC	ROUND CANOPY / PAVILLON ROND	
	FOR LED & STEM CABLES 1/2" - 0.50" CANOPY (240C)	
	FOR INC. & LED 1/20" CANOPY (240E)	
	FOR DIMMING LED 1/20" CANOPY (240G)	
TA1	TRACK ADAPTOR / ADAPTEUR DE RAIL	
	1 CIRCUIT	
	INC. 120V ADAPTOR (2734B)	
	LED DIMMING & NON-DIMMING 120V ADAPTOR (2734C)	
MOUNTING OPTION OPTION DE MONTAGE		
SDA*	SLOPE CELLING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (POSITION 300°, PHOT. 90°)	
	*NOT AVAILABLE WITH A STEM	
TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL**		
WH	WHITE	
BLK	BLACK	
M G	METALLIC GRAY (2734B ONLY)	
	**FILL IN A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE		
BLK	BLACK	
CHR	CHROME	
CUP FINISH FINI COUPE		
BLK	BLACK	
CHR	CHROME	
ACCESSORY ACCESSoire		
3983	DEEP JUNCTION BOX (PROVIDED FOR LED WITH STEM 1/2" AS PER ABOVE)	
PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT		
BIM		
DIM		
IES		
LED		
ONLY		

SPECIFICATION

Eureka Lighting © 2017

www.eurekalighting.com

V2.0-201706

MO

Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Model Number: SLIM STACK 2036

Type:

Spec Sheets Folder

E1

[illegible]

ANATOMY

BIM

DIM

IES

LED

2038B

350°

2038

12°

SLIM/STUBBY STACK

2036B/2038B

4036/4038

2036/2038

CHROME CANOPY
1/4" thick Standard
1" thick Dimming

SHADE
Double layered die-formed steel with chrome plated or polyester powder finish

LED MODULE WITH DIE-CAST ALUMINUM HEATSINK
Black anodized for improved thermal management

ORIENTATION
Adjustable fitting

DIMMING OPTION
Lightech "Trailing Edge" electronic dimming driver

17° TOTAL BEAM ANGLE
PMMA TIR (total internal reflecting) Ledli optic

CONTRASTING AND VERSATILE
Pendant and projector have a perfectly formed design

STEM

INCANDESCENT

HALOGEN MR16

ORIENTATION
Adjustable fitting on stem

2036B J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 7.87" 200mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 6.10" 155mm LED DIM

2038B J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 8.14" 207mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 4.61" 117mm LED DIM

4036 J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 8.14" 207mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 4.61" 117mm LED DIM

4038 J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 8.14" 207mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 4.61" 117mm LED DIM

2036 J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 8.14" 207mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 4.61" 117mm LED DIM

4038 J-BOX 2.25" 57mm, 5.00" 127mm, 6.50" 165mm, 8.14" 207mm, 0.4" 10mm, 0.4" 10mm, 5.20" 132mm HALUC, LED, 4.61" 117mm LED DIM

SPECIFICATIONS

LIGHT SOURCE

MODULE

LUMENS (DELIVERED)

CRI

ROHS

HOUSING

HEATSINK

LIGHT DISTRIBUTION

OPTICS

VOLTAGE

DRIVER

DIMMING

LM-79

WARRANTY

CERTIFICATION

LED

4 x Nichia - total 4w

UL recognized - made in USA

504lm (4000K)

85 CRI (typical)

Compliant

Die-formed steel

Black anodized aluminum

Directional projector [203X(B)]/Direct [403X]

LED/LT 1R - 17° total beam angle

120V or 277V

350 mA

Phase dimming [DP] or 0-10V dimming [DVI]

On request

5 years [on electronic components]

CSA recognized

HALOGEN

MR16C, GU5.3 Base/MR16, GZ10 Base-50W

N/A

N/A

N/A

N/A

N/A

N/A

120V [MR16], 120V or 277V [MR16C]

Electronic low voltage transformer

Dimmable

INCANDESCENT

INC, PAR20, Medium Base-50W

N/A

N/A

N/A

N/A

N/A

N/A

120V

N/A

Dimmable

EUREKA

225 de Liège Ouest, Suite #200
Montreal (QC), Canada H2P 1H4
Tel: 514-265-5515 Fax: 514-995-4169
www.eurekalighting.com

2036B 4036 2036
2038B 4038 2038

Eureka Lighting ©2017

www.eurekalighting.com

V4.0-202010

MO

Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

The Edison: An American Bistro

R1: 5/4/22

Fixture Manufacturer: EUREKA

Fixture Model Number: 1112AD

Type:

Spec Sheets Folder


G1

1112AD/1152AD/1152SD

PROJECT PROJET

SPEC TYPE

NOTES



HOUSING SELECTION MATRIX MATRICE DE SÉLECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAJE	REMODELING RÉNOUVELATION	NEW INSTALLATION NOUVELLE INSTALLATION	NEW INSTALLATION (AIR RETURN PLENUM) NOUVELLE INSTALLATION (SPRINGS & RETOUR D'AIR)	NEW INSTALLATION (INSULATED CEILING + AIR TIGHT) NOUVELLE INSTALLATION (ISOTHERMIQUE + PLAFOND SOULÉ)
35W HAL MR16, GU5.3 Base	120V ELECT.				1810C-0.35.E
35W HAL MR16, GU5.3 Base	277V ELECT.				1810C-0.35.E.3
50W HAL MR16, GU5.3 Base	120V MAG.	1020C-0.35	1600C-0.35	1710C3-0.35	
50W HAL MR16, GU5.3 Base	120V ELECT.	1000C-0.35.E	1600C-0.35.E	1710C3-0.35.E	
50W HAL MR16, GU5.3 Base	277V ELECT.	1000C-0.35.E.3	1600C-0.35.E.3	1710C3-0.35.E.3	
35W HAL MR16, G270 Base	120V				1810-2.35
30W HAL MR16, G270 Base	120V	1591C-0.35	1605C-0.35	1711C3-0.35	
20W CMH MR16, G270 Base (FOR 1152AD, 1152SD ONLY)	120V ELECT.	1520C-4.35.E	1630C-4.35.E	1712C3-4.35.E	1813C-4.35.E
20W CMH MR16, G270 Base (FOR 1152AD, 1152SD ONLY)	277V ELECT.	1520C-4.35.E.3	1630C-4.35.E.3	1712C3-4.35.E.3	1813C-4.35.E.3
4W EUREKA LED MODULE	120V ELECT.	1504C-9.35.4	1604C-9.35.4	1704C3-9.35.4	1804C-9.35.4
4W EUREKA LED MODULE	277V ELECT.	1504C-9.35.4.3	1604C-9.35.4.3	1704C3-9.35.4.3	1804C-9.35.4.3
4W EUREKA LED MODULE, Phase Dimming	120V ELECT.	1524C-9.35.4.3P	1604C-9.35.4.3P	1704C3-9.35.4.3P	1804C-9.35.4.3P
4W EUREKA LED MODULE, 0-10V Dimming	120V ELECT.	1524C-9.35.4.3V	1604C-9.35.4.3V	1704C3-9.35.4.3V	1804C-9.35.4.3V
11W EUREKA LED MODULE, Phase Dimming	120V ELECT.	1604-9.35.11.0P	1604-9.35.11.0P	1704C3-9.35.11.0P	1804-9.35.11.0P
11W EUREKA LED MODULE, 0-10V Dimming	120V ELECT.	1604-9.35.11.0V	1604-9.35.11.0V	1704C3-9.35.11.0V	1804-9.35.11.0V
16W Max. LED, MR16, GU5.3 Base	120V ELECT.	1504C-0.35.E	1604C-0.35.E	1704C3-0.35.E	1804C-0.35.E
16W Max. LED, MR16, GU5.3 Base	277V ELECT.	1504C-0.35.E.3	1604C-0.35.E.3	1704C3-0.35.E.3	1804C-0.35.E.3

SPECIFICATION

Eureka Lighting © 2017


www.eurekalighting.com

V1.0-201705

ANATOMY

BIM IES LED

11W LED MODULE

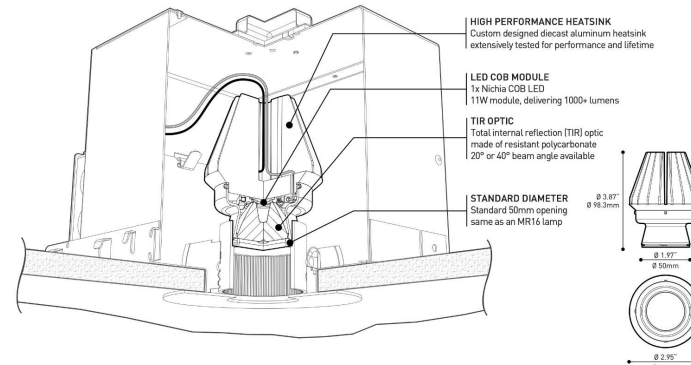

EUREKA COMPATIBLE TRIMS

1121A	1112AD	1173A
1181A	1153A	1173AD
1111A	1153AD	1173S
1151A	1153S	1173SD
1151S	1153SD	BASS*
1112A		MEGA BASS

* LIMITED ADJUSTMENT ANGLE

EUREKA COMPATIBLE HOUSINGS

Get the latest compatible trims & compatible housings lists by consulting the eureka website:
www.eurekalighting.com

CHARACTERISTICS

LED EMITTER**	11w
OPTICS	1x Nichia Chip On Board (COB) LED - 14w total system wattage
MODULE	TIR - 20° & 40° beam angle
LUMENS**	UL recognized - Made in USA
EFFICACY	1067 delivered lumens
CRI	90 lumens / Watt
DRIVER (DIMMING)	83 CRI typical
VOLTAGE	(Phase dimming) 120V only ***
L70 / LM-79	(0-10V dimming) 120-277V ***
CERTIFICATION / WARRANTY	120V or 277V
	50 000 hrs / On request
	C-UL-us / 5 years

225 de Liège Ouest, Suite #200
Montreal (QC), Canada H2P 1H4
Tel.: 514.385.3515 Fax: 514.385.4169
www.eurekalighting.com

LED.11.XX.XX

Eureka Lighting ©2017

www.eurekalighting.com

V3.0-201705

MO

Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Manufacturer: EUREKA

Fixture Model Number: PLATE OUT SINGLE 3449

Type:

Spec Sheets Folder


H1

PLATE OUT SINGLE 3449

PROJECT / PROJET
SPEC TYPE
NOTES



OPTIONS



ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL / MODÈLE	3449	PLATE OUT SINGLE
LIGHT SOURCE / SOURCE LUMINEUSE		
(NOT FAUL, LAMP TYPE, OTHER INFO)		
LED	REGULAR OUTPUT	
LED-HO	HIGH OUTPUT	
COLOR TEMPERATURE / TEMPÉRATURE DE COULEUR		
87+	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE / VOLTAJE		
100V	100 VOLT	
277V	277 VOLT	
DIMMING OPTION / OPTION DE DIMMATION		
DV	0-10V DIMMING (100-277V)	
HOUSING / BOÎTIER		
WHE	WHITE FINE TEXTURE	
ANTE	ANTIRACTIVE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	

PRODUCT CHARACTERISTICS / CARACTÉRISTIQUES DU PRODUIT

ADA BIM DIM IES LED

DESIGN: Designed for use in corridors and public areas, these wall mounted indirect luminaires are outdoor versions of our Plate and are built to be rugged and withstand the elements. They are available in a classic simple version or with the extended double light source version. Both are ADA compliant and can be used indoors.

CONSTRUCTION: Linear LED strip with self-modulating temperature control for an optimal performance and lifetime. Available with standard 0-10V dimming.

DIFFUSER: CNC machined aluminum, die-stamped galvanized steel and four levels of die-cut silicone gaskets for secure weather resistance.

CERTIFIED: Translucent frosted acrylic. CSA Listed to US and Canadian safety standards, 20°C ambient and wet locations, IP65 rated.

CONCEPTION: Conçues pour être utilisées dans les couloirs et espaces publics, ces appliques murales à éclairage indirect sont des versions extérieures de notre Plate et sont conçues pour être robustes et résister aux intempéries. Elles sont offertes en version simple et en version étendue avec source lumineuse double. Elles sont conformes à la norme ADA et peuvent être installées à l'intérieur.


SOURCE LUMINEUSE: Bande lumineuse LED, avec autocontrôle de température pour une performance et durée de vie optimales. Offert avec gradation standard 0-10V.

CONSTRUCTION: Aluminium usiné par contrôle numérique, acier galvanisé découpé et gilet avec les joints d'étanchéité en silicone comprimé pour résister aux intempéries.

DIFFUSEUR: Acrylique givré translucide.

CERTIFIÉ: Homologué CSA aux standards UL Canada et E-14 - Température ambiante 20°C et emplacements mouillés. Conforme à la norme IP65.

PLATE OUT 3449/3450

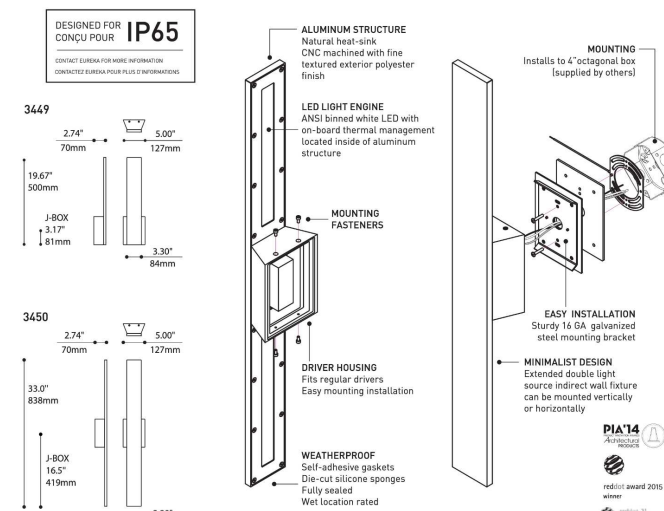


PRODUCT SPECIFICATION	3449 - REG	3449 - HO	3450 - REG	3450 - HO
PERFORMANCE				
SYSTEM WATTAGE	4.9 W	7.3 W	9.9 W	14.6 W
DELIVERED LUMENS (4000K)	384 LM	582 LM	797 LM	1124 LM
EFFICACY	80.4 LM/W	79.9 LM/W	79.9 LM/W	76.9 LM/W
OTHER INFORMATION				
LUMINAIRE'S WEIGHT	6.03 LB / 2.73 KG	6.53 LB / 2.97 KG	8.40 LB / 3.84 KG	8.40 LB / 3.84 KG
L70 (LUMEN MAINTENANCE)	> 60,000 HRS	> 60,000 HRS	> 60,000 HRS	> 60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3000K	0.98
90+	3000K	0.94
90+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION



Eureka Lighting © 2021

www.eurekalighting.com

SPECIFICATION

V1.0 - 2021.08



All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

TECHNICAL DATA

V1.0 - 2021.08

MO

Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Manufacturer: EUREKA

Fixture Model Number: NOVA 3300


Spec Sheets Folder

Type:

I1

NOVA 3300 / 3300B

PROJECT / PROJET
SPEC TYPE
NOTES



ORDERING SPECIFICATION / SPÉCIFICATION DE COMMANDE	CODE
MODEL / MODÈLE	
3300 NOVA	
3300B NOVA.B	
LIGHT SOURCE / SOURCE LUMINEUSE	LED.1
(OPTIONAL) LED TYPE / TYPE (OPTIONNEL)	TM LED
COLOR TEMPERATURE / TEMPÉRATURE DE COULEUR	
30 3000K	
35 3000K	
40 4000K	
VOLTAGE / VOLTAJE	120V
120V 120 VOLT	
STRUCTURE FINISH / FINI STRUCTURE	M.G.
M.G. METALLIC GRAY	
DECORATIVE PLATE FINISH / FINI PLAQUE DÉCORATIVE	
FOR ORDER ONLY	
SA SATIN ALUMINUM	

PRODUCT CHARACTERISTICS / CARACTÉRISTIQUES DU PRODUIT

ADA	LED	1
DESIGN:	Classic way-finding fixture can be ordered with custom artwork for orders over ten units.	
LIGHT SOURCE:	Energy saving LED standard.	
STRUCTURE:	Die-cast aluminum structure.	
FINISH:	Metallic gray powder coated finish.	
OPTIC:	Standard corrugated aluminum face plate or smooth polymer/c face plate (3300B).	
CERTIFIED:	c-UL-UL	
CONCEPTION:	Produit classique de signalisation offert avec des illustrations sur mesure pour une commande de plus de dix unités.	
SOURCE LUMINEUSE:	DEL à faible consommation.	
STRUCTURE:	Structure d'aluminium injectée.	
FINI:	Peinture électrostatique gris métallique.	
OPTIQUE:	Plaque d'aluminium standard ou plaque face de polymère (3300B).	
CERTIFIÉ:	c-UL-UL	

OPTIONS



3300B ENGRAVED / ORAVER



3300B CUT THROUGH PLATE / PLAQUE DÉCOUPEE



Eureka Lighting © 2017

www.eurekalighting.com

SPECIFICATION

V1.0-2017-06

MO

Max Okst Lighting Design

maxokst@gmail.com
(631) 605-9525
www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22

Fixture Manufacturer: EUREKA

Fixture Model Number: SCOUT 3049

Type:

Spec Sheets Folder

J1

SCOUT 3049


PROJECT / PROJET
SPEC TYPE
NOTES



FINISH / FINI



BLK WHT LGE PGE NRE



ORDERING SPECIFICATION / SPÉCIFICATION DE COMMANDE

CODE

MODEL / MODÈLE
3049-6 SCOUT 6"
3049-10 SCOUT 10"
3049-18 SCOUT 18"

LIGHT SOURCE / SOURCE LUMINEUSE
LED
REGULAN OUTPUT
HIGH OUTPUT

COLOR TEMPERATURE / TEMPÉRATURE DE COULEUR
27° 2700K
30 3000K
35 3500K
40 4000K
* (DIMMER) FACT TIME MUST APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) / INDICE DE RENDU DE COULEUR (IRC)
80+ CRI
90+ CRI
* (DIMMER) FACT TIME MUST APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE / VOLTAGE
120V 120 VOLT
277V 277 VOLT

CONTROL OPTION / OPTION DE CONTRÔLE
DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTMR* NIGHT AIR CONTROL, 80%
NLTMR* NIGHT WIRE CONTROL
* LIGHT INFORMATION REQUESTS A REMOTE POWER PACK (3049-10 & 18) AND/OR DIMMERS FOR NLTMR*
* EMERGENCY BATT FOR NOT AVAILABLE WITH NLTMR OPT CODE
* (DIMMER) FACT TIME MUST APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

EMERGENCY BATTERY / BATTERIE D'URGENCE
FOR 120-277V, EM ORDER BOX INCLUDES, INSTALLED REMOTELY, SEE DIM GUIDE FOR DETAILS.
EMB* EMERGENCY BATTERY FOR REMOTE BOX
* BATTERY ACCESSORY REQUIRED

BEAM ANGLE / ANGLE DE FAISCEAU
NA NARROW (28°)
ME MEDIUM (48°)
WE WIDE (64°)

OPTICAL ACCESSORIES / ACCESSOIRES OPTIQUES
CLR CLEAR GLASS LENS
FRO FROSTED GLASS LENS
HON HONEYCOMB COVER
SOL SOLITE SOFTENING LENS

CYLINDER FINISH / FINI CYLINDRE
CHARTER BLACK FINE TEXTURE
BLK BLACK FINE TEXTURE
WHT WHITE FINE TEXTURE
LGE LIGHT GREY FINE TEXTURE
PGE PALE GREEN FINE TEXTURE
NRE NAVY BLUE FINE TEXTURE
RAL* PLEASE SPECIFY RAL CODE
* (DIMMER) FACT TIME MUST APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE


BAFFLE FINISH / FINI DEFLECTEUR
BLK BLACK FINE TEXTURE
WHT WHITE FINE TEXTURE

ACCESSORY / ACCESSOIRES
3049-10 DEEP JUNCTION BOX (PROVIDED FOR 3049-6)
3049-10A NLTMR AIR CONTROL REMOTE POWER PACK
3049-10A NLTMR WIRE REMOTE POWER PACK
EMERGENCY BATTERY ACCESSORY / ACCESSOIRES BATTERIE D'URGENCE
3049-10A ELECTRICAL BOX FOR EM EMERGENCY BATTERY

PRODUCT CHARACTERISTICS / CARACTÉRISTIQUES DU PRODUIT

BIM DIM EMB RES LED

SCOUT

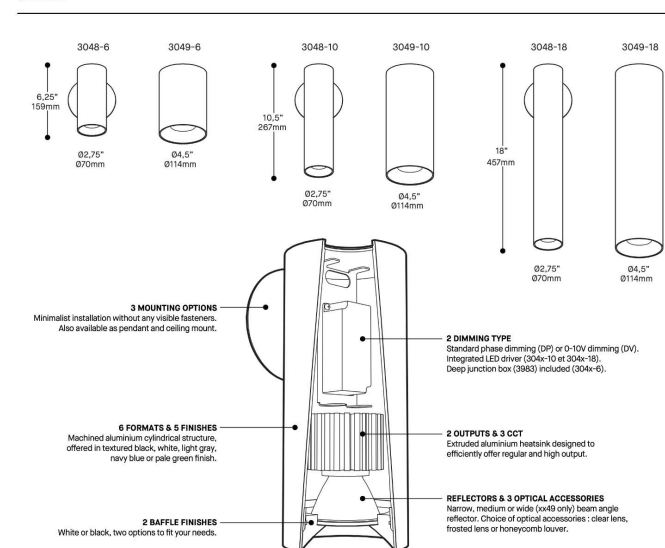

PRODUCT SPECIFICATION	XX48-NA	XX48-ME	XX49-NA	XX49-ME	XX49-WI
PERFORMANCE	REG HO	REG HO	REG HO	REG HO	REG HO
SYSTEM WATTAGE	9.5W 13.6W	9.5W 13.6W	13.7W 20W	13.7W 20W	13.7W 20W
DELIVERED LUMENS (4000K)	1051 LM 1425 LM	1051 LM 1425 LM	1284 LM 1927 LM	1284 LM 1927 LM	1284 LM 1927 LM
EFFICACY	110.6 LM/W 104.7 LM/W	110.6 LM/W 104.7 LM/W	101.7 LM/W 95.4 LM/W	110.3 LM/W 103.5 LM/W	107.4 LM/W 101.1 LM/W
OTHER INFORMATION					
BEAM ANGLE	28°	48°	38°	48°	64°
LUMINAIRE WEIGHT	1.29KG / 1.48KG / 1.81KG	1.29KG / 1.48KG / 1.81KG	1.72KG / 2.09KG / 2.60KG	1.72KG / 2.09KG / 2.60KG	1.72KG / 2.09KG / 2.60KG
L70 (LUMEN MAINTENANCE)	2.83LBS / 3.32LBS / 3.99LBS	2.83LBS / 3.32LBS / 3.99LBS	3.79LBS / 4.59LBS / 5.72LBS	3.79LBS / 4.59LBS / 5.72LBS	3.79LBS / 4.59LBS / 5.72LBS
EFFICACY MULTIPLIERS					
LIGHT DISTRIBUTION					

SPECIFICATION

Eureka Lighting © 2022

www.euralighting.com

V4.0 — 2022.03

TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

V4.0 — 2021.08

Max Okst Lighting Design

maxokst@gmail.com

(631) 605-9525

www.maxokst.com

Project:

The Edison:
An American Bistro

R1: 5/4/22