

TCX59 & TCX58 Tire Changers

Optimized for truck and SUV tire service

NEW



Key features at a glance

NEW

Bead Press with built in blast

- ✓ Simplified single press design
- ✓ Powerful blast inflation
- ✓ Large, integrated air tank

Locking lower arm

- ✓ Helps demount heavy and difficult tires
- ✓ Assists match-mounting

Tabletop clamp


- ✓ 10–28 in. clamping range (6–30 in. with optional adaptors)
- ✓ Measurement marks ease clamping
- ✓ Twin-cylinder actuators exert more clamping force than single-cylinder designs

Motor and drive

- ✓ Powerful 220V high-torque motor
- ✓ Two-speed forward drive

Swing-arm column

- ✓ Saves space over tilt-column designs
- ✓ Locks rim diameter and width measurements for same-sized wheels

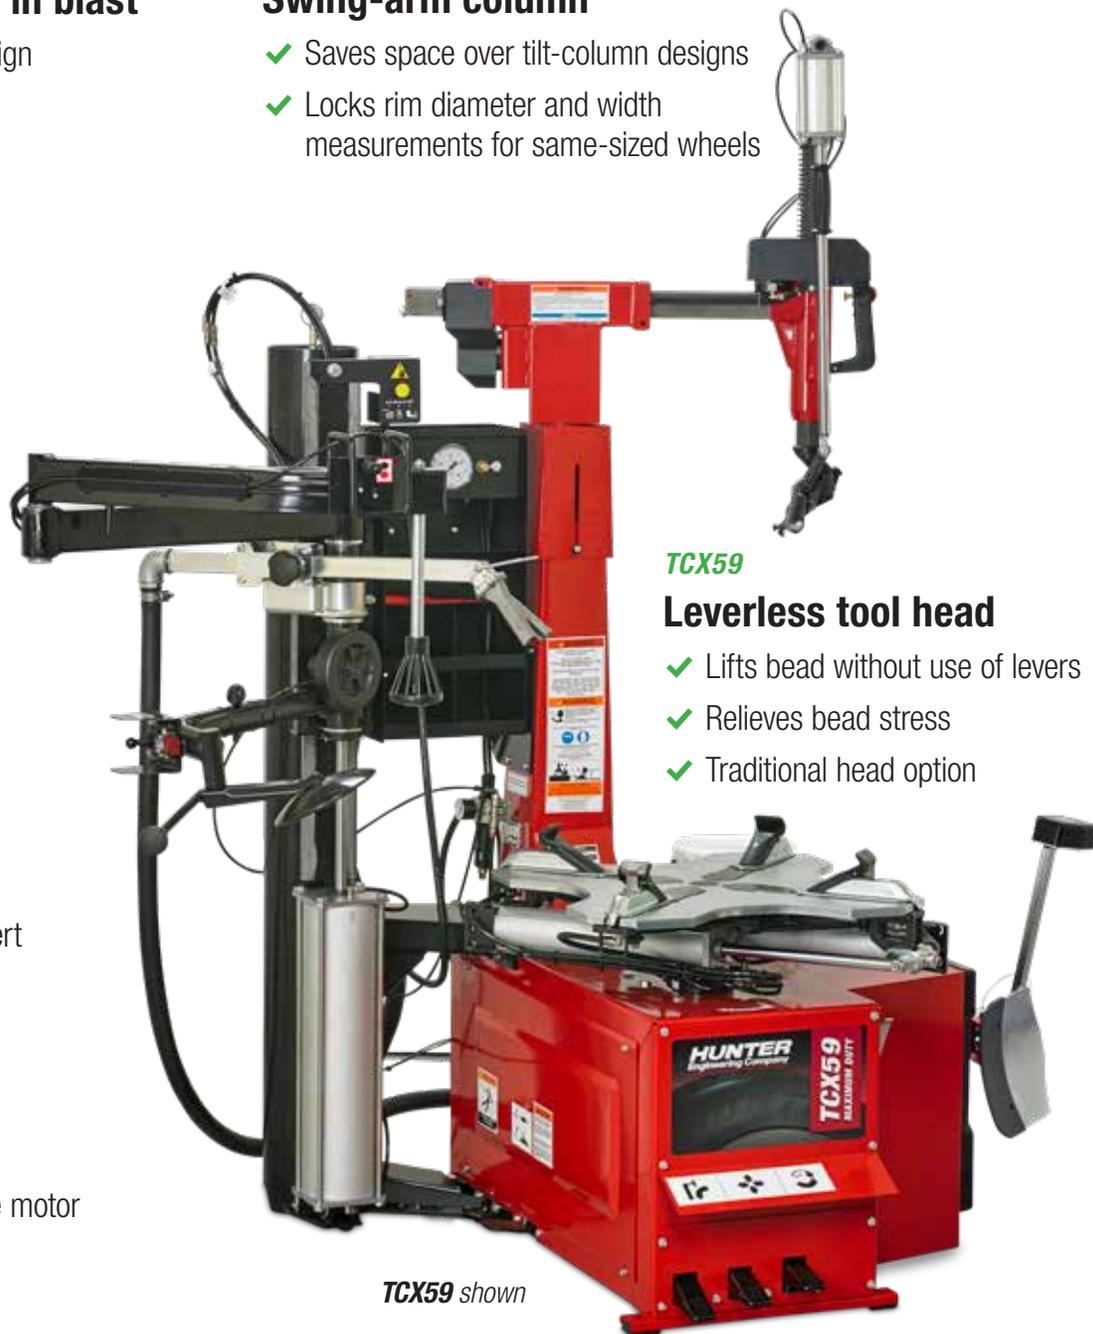

TCX59

Leverless tool head

- ✓ Lifts bead without use of levers
- ✓ Relieves bead stress
- ✓ Traditional head option

TCX59 shown

OPTIONAL

Wheel lift

- ✓ Eases servicing of large assemblies




PowerOut™ bead loosener

- ✓ Fingertip control makes large assembly service easy
- ✓ Most powerful in the industry

FastBlast™ Inflation System

NEW

Designed with truck and SUV service in mind, the new top-side blast inflation system is optimized to seat even the most difficult tires.

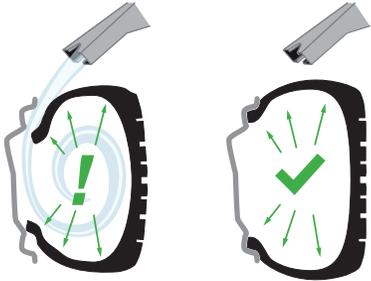

- ✓ Large 6.5 gallon air tank features a higher capacity than most portable inflation devices
- ✓ Traditional jaw blast inflation is still standard and effective for most tires



Effortless inflation



Large tank provides ample volume to seat the toughest tires. Simply set the position, select inflation mode then press the inflation pedal.

Safe and easy



Nozzle is securely mounted to Bead Press carriage, allowing completely hands free operation.

Optimized bead press system

Simplicity & power

- ✓ Single press foot is easy to use
- ✓ Features integrated tire lifting hook
- ✓ Oversized air lines for fast operation



EXCLUSIVE

Locking Lower Arm



Demounting with locking arm

Demount heavy, stiff or wide tires easily with roller disc.

Easy Bead Press



Keeps tough tires in the drop center

Fast, intuitive operation with best-in-class power.

Exceptional clamping

Easy-to-use, adjustable tabletop

- ✓ Built-in adjustment system provides 10- to 28-inch clamping range
- ✓ All jaws adjust simultaneously for mistake-free clamping
- ✓ Polished tabletop for easy cleanup
- ✓ Hi-grip jaw covers transmit mounting torque and protect wheels
- ✓ Diameter marks aid external clamping



UPDATED

Integrated blast nozzles for standard inflation


- ✓ Automatically adjust to wheel diameter
- ✓ Optimized flow for internal and external clamping



Efficient and powerful features

PowerOut™ side shovel

- ✓ Fingertip control eases service of large assemblies
- ✓ Smoothly pulls tire out of stuck beads, saves time in positioning
- ✓ Three-way adjustable shovel angle

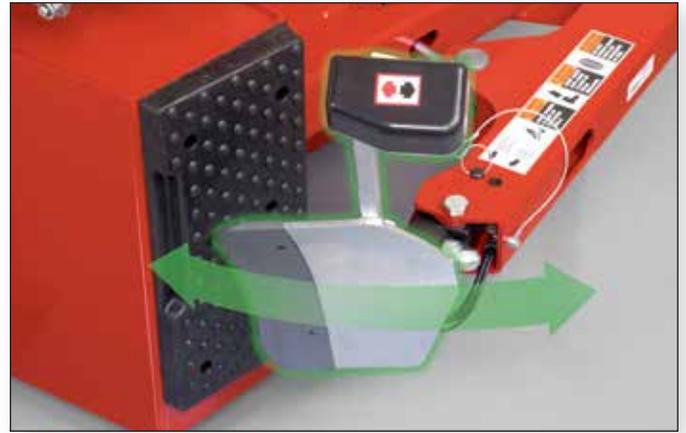

EXCLUSIVE

Automatic swing arm

- ✓ With the push of a single button, the swing arm locks the wheel diameter and width
- ✓ 30% smaller footprint than tilt-column designs
- ✓ Foot pedal operation keeps hands free



Powerful motor and drive

- ✓ Two-speeds forward (7 and 17 rpm) for efficiency or finesse
- ✓ Single-speed in reverse (7 rpm)
- ✓ 220V high-torque motor delivers ample power for difficult conditions



Superior rim handling

TCX59


Fast and easy leverless tool head

Leverless operation eliminates:

- ✓ Technicians straining to pull over tough beads
- ✓ Bead damage from manual levers
- ✓ Rim damage from lever during demounting

Easy-to-operate controls

- ✓ Variable speed lever control
- ✓ Familiar mount head design
- ✓ Familiar mounting techniques

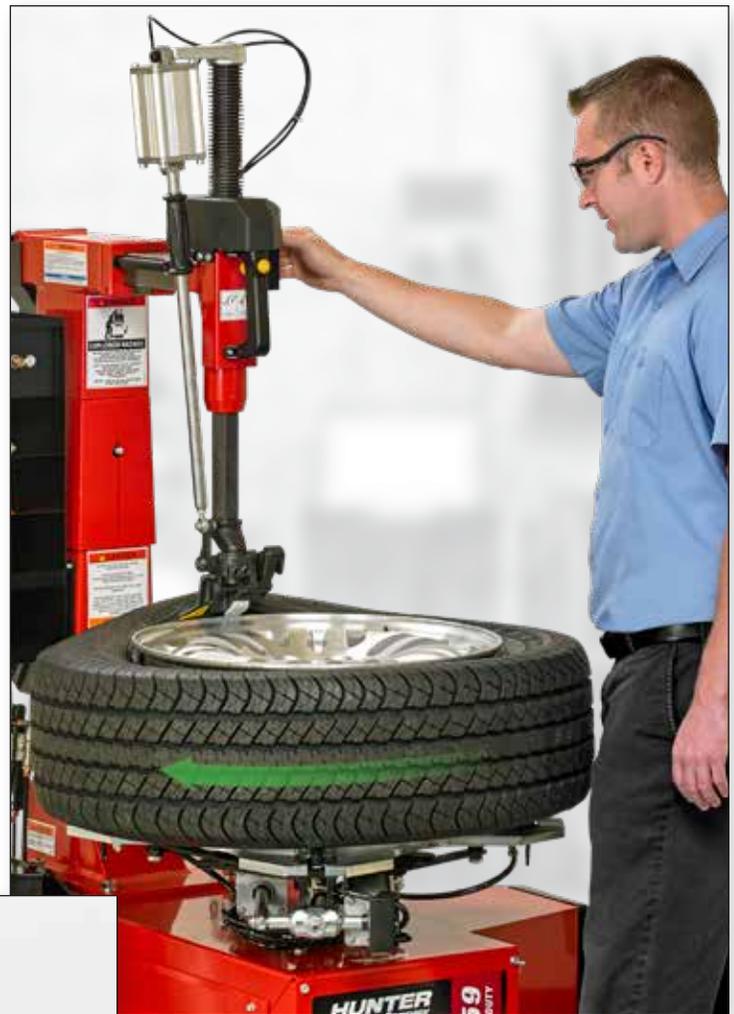

TCX58

Traditional tool head

- ✓ Two choices included:
 - Steel head with polymer insert for wheel protection
 - Full polymer head
- ✓ Patented “wing” design and knob on backside keep tire in place during mounting/demounting



Equipment upgrades

Wheel Lift – 20-2045-1



Optional wheel lift eases servicing of large assemblies. Allows for more careful handling of expensive wheels.

Specifications*

Electrical	220V, 1 ph, NEMA plug type L6-20P
Air pressure operating range	110–145 psi
Air volume of inflation tank	6.5 gallons
Wheel clamping (nominal)	
External clamping (min-max)	10 – 26 in.
Internal clamping (min-max)	12 – 28 in.
With optional adaptors	6 – 30 in.
Table rotation speed	
Electric motor	Clockwise: 7 rpm and 17 rpm Counter-clockwise: 7 rpm
Tire diameter	45 in.
Rim width maximum	14 in.
Bead loosener width	17 in.
Shipping weight	1,116 lbs.
w/ wheel lift	1,202 lbs.
Max. space dimensions	55 in. (W) x 82 in. (H) X 58 in. (D)

* Some dimensions, capacities, and specifications may vary depending on tire and wheel configurations or options.

TCX58 standard head alternative

Hunter's TCX58 Tire Changer has all the power of the TCX59 with the choice of a polymer or steel traditional tool head.

A perfect match for the traditionalist who wants big power in a low-tech package.



TCX58 shown

TCX59 / TCX58 includes:

- ✓ FastBlast™ Inflation System
- ✓ Bead Press System with:
 - Top side blast inflation
 - Press shoe with integrated hook
 - Locking lower demount disc
- ✓ Standard bead lever and bead lever polymer protectors
- ✓ Shovel protectors (polymer)
- ✓ Hi-grip jaw protectors

Ordering Information:

- TCX59** Electric leverless tabletop changer
- TCX59W** Electric leverless tabletop changer with wheel lift
- TCX58** Electric tabletop changer
- TCX58W** Electric tabletop changer with wheel lift

Because of continuing technological advancements, specifications, models and options are subject to change without notice.