

SOB 22-44 RS232 TO RS485/RS422 CONVERTER

Quick manual

Features

Input: RS-232 protocol / RS485 / RS422 (Bidirectional)

Output: RS-485/422 protocol (Two wire Or Four wire)

Auto switching baudrate, From 300-115200 bps

256 modules max. in one RS-485 network without repeater

Two-terminal isolation upto 2.5KVDC (Input And Output are mutually isolated)

Multple Baudrate; Multple Data Format

Communication distance:

2.1 Km/9600 Bps

2.7 Km/4800 Bps

3.6 Km/2400 Bps


Power requirements: +10V ~ 30VDC

Power consumption 2.2W(max)


Dimension: 11.6cm * 7.2cm * 2.5cm



Ref. Of Connection:-

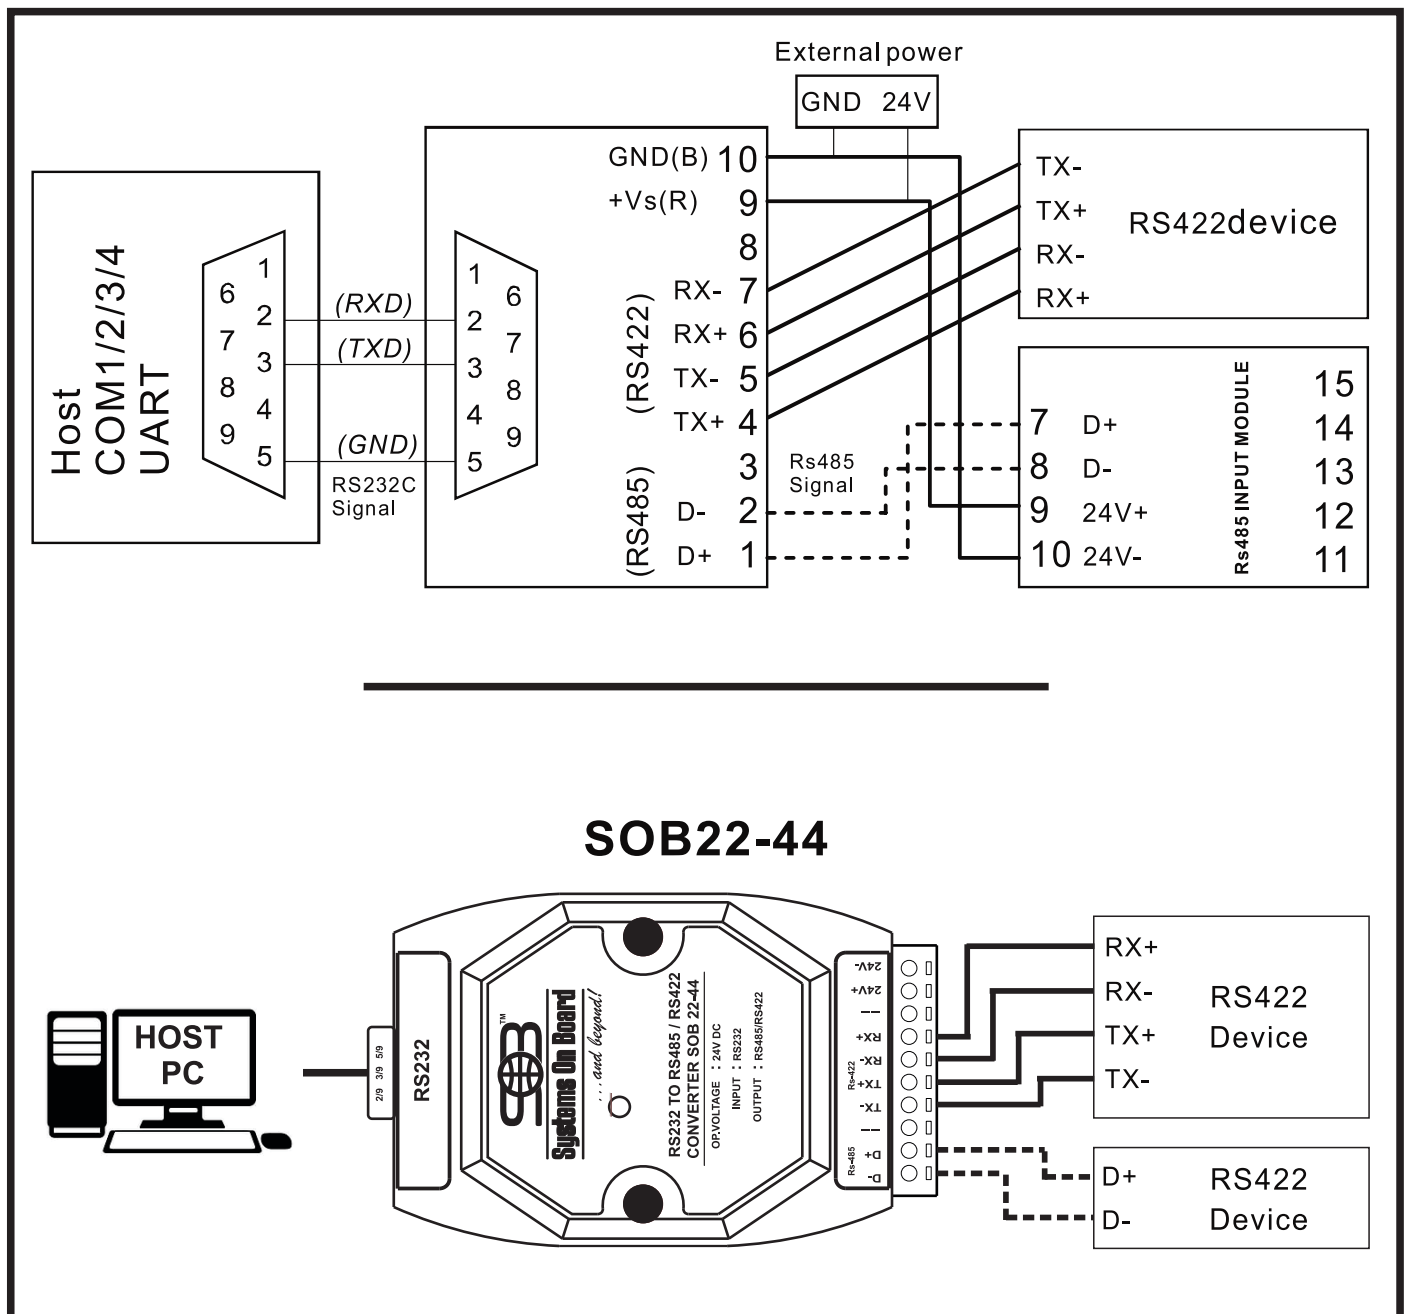


MECHANICAL SPECIFICATION :-

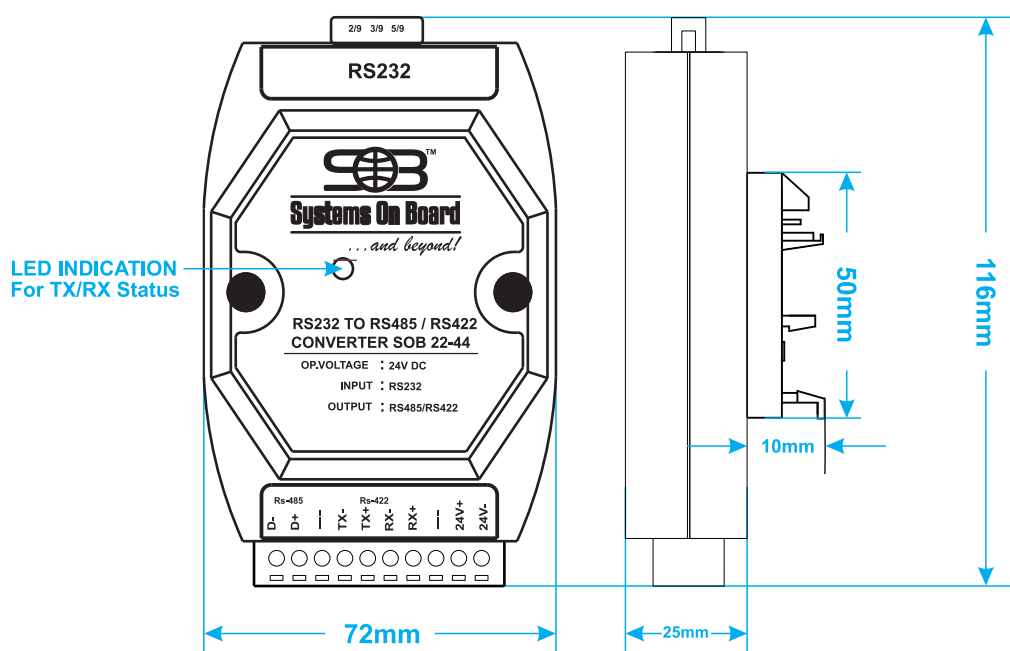

Accessories:- DIN-rail Mounting kit,35mm

MOUNTING ARRANGEMENT :-

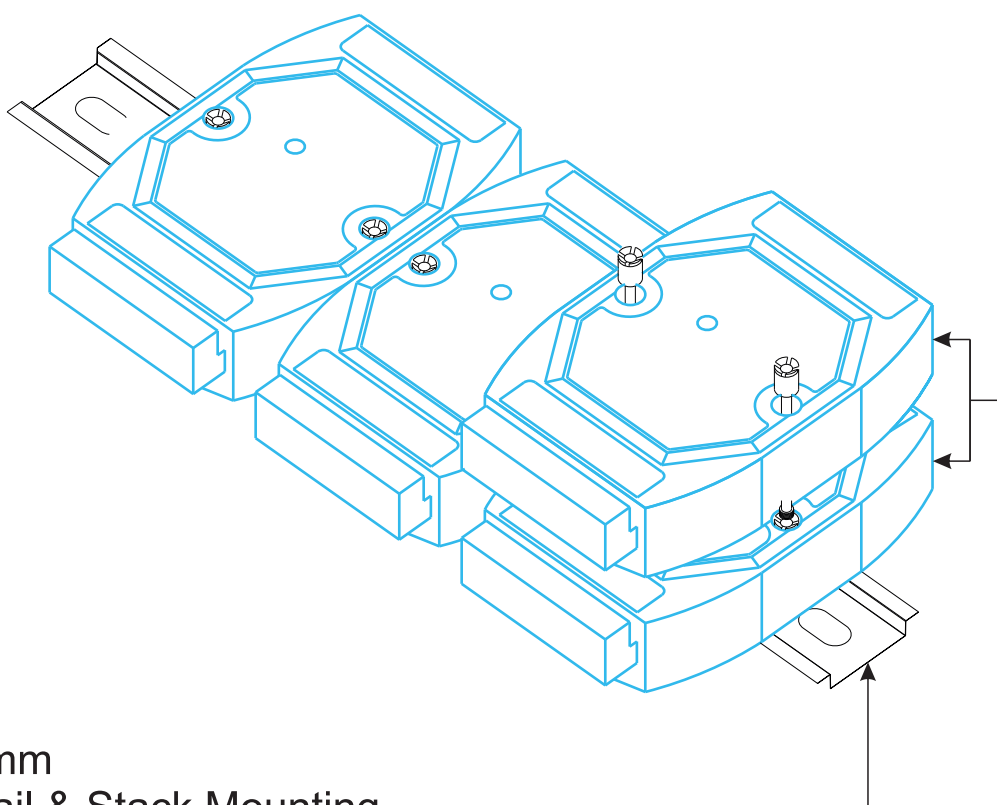

Unit: mm

Din-Rail & Stack Mounting