

# SecureSeal Single Panel


**SecureSeal**  
LIFE GUARANTEE



6mm Toughness Glass

Height  
**1500**  
mm

Lifetime Guarantee



CE Standards

Concealed  
Fittings

Reversible


## Features:

- Mershield Stayclear protected glass
- Reversible
- Lifetime Guarantee

## SecureSeal Single Panel

Size, mm W x H	Order Code	Panels	Adjustment (Min - Max)
800 x 1500	MS1	1	780 - 800mm

## Configuration:


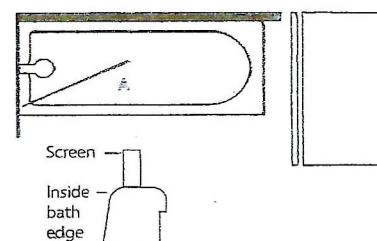


A = Moving Panels (screen width when folded into the bath 712mm)

Recommended shower head position



# Eastbrook Beaufort Portland 1700 x 700 x 440mm Single Ended Bath

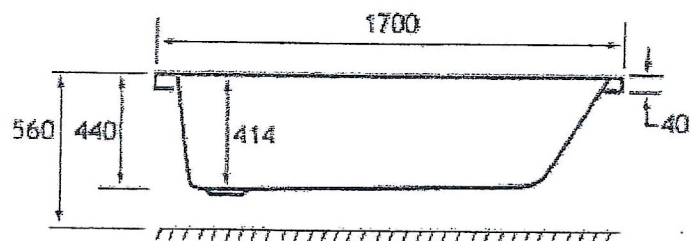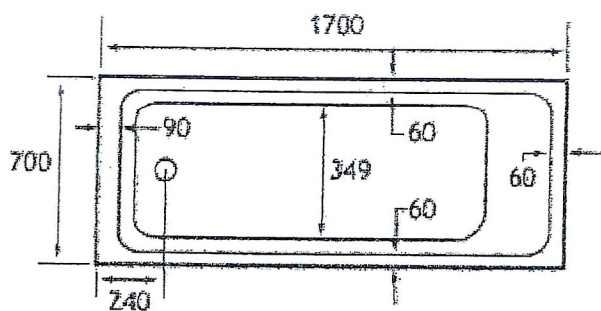

## Eastbrook Beaufort Portland 1700 x 700 x 440mm Single Ended Bath

### Eastbrook Beaufort Portland 1700 x 700 x 440mm Single Ended Bath

The Portland bath is a stunning, minimalist bathing solution, available in both single and double ended variants, with or without grips. Featuring a modern angular design with straight sides and a sloping back, the Portland is surprisingly deep, providing a generous, warm, and relaxing bath. The Portland is available in a wide range of bath sizes and in a choice of thickness – 5mm acrylic or ultra-strong Beauforté, which significantly extends the life of the bath.

- Beaufort 5mm acrylic -25 year guarantee or
- Beauforté ultra strong reinforced -30 year guarantee
- Made to a very high quality with excellent quality control standards
- British made
- Wall brackets, Feet and leg kit included
- Drilled with standard size waste and overflow holes (waste and overflow not included)
- No drilled tap hole
- Straight sides and a sloping back
- Modern, spacious and comfortable
- Choice of 9 sizes
- Compatible with bath screens 69.0142, 58.702 or 58.703-see accessories below.

#### Dimensions

- Length: 1700mm
- Width: 700mm
- Installed height (to underside of rim): 560mm
- Internal depth: 440mm
- Water capacity: 241 litres

Bath panels are flat in design.

Also available adjustable L-shaped bath panel-please see accessories below.

42.0016 5mm

42.1016 Beauforté reinforced

42.5013 Standard FP

42.6013 Beauforté FP

42.5024 Standard EP

42.6024 Beauforté EP

#### Beaufort/Beauforté

A Wave Of British Quality That Lasts BEST IN CLASS MANUFACTURING

Following the best British manufacturing standards and technical innovation, Beaufort baths are manufactured in the UK with skill and precision. All Beaufort baths are manufactured from 5mm Asterite sanitaryware grade cell cast acrylic sheet. As a result of the acrylic being cast the colour is all the way through the material rather than a top surface layer. Each bath is vacuum formed on the very latest vertical vacuum forming machines that are capable of zone heating the acrylic prior to moulding to ensure not only an even form every time but an ability to control the material thickness as it is drawn into the tool.



## Eastbrook Beaufort Portland 1700 x 700 x 440mm Single Ended Bath

Following the finest traditions of British craftsmanship and technical innovation, the Beaufort line is manufactured to extracting standards meeting EN198, CE EN14516:2015 CL1 PH standards. The production moulds have been created using one of the fastest and most accurate Computer Numerical Control (CNC) systems available to machine the best quality solid aluminium bath moulds that have been milled to tolerances of 10 micrometres. Regulated temperature controls and integrated vacuum chambers ensure that each bath formed is done so in regimented conditions to ensure the perfect result every time. Precision moulding. Our precise mould calibration delivers an impossibly silky finish, arguably the best in the market.

### The Difference Is Beaufort GALE FORCE STRENGTH

The materials from which our Beauforté baths are constructed are incredibly strong and hard wearing. This market leading reinforcement process results in a product that is as strong as a steel bath and almost double the strength of a typical acrylic bath. This result gives us a more rigid bath with no movement or flexibility when you shower or bathe. MAINTAINS WARMTH The standard 5mm bath is made storm proof by our proprietary fibre and resin mix. The extra reinforcement in the Beauforté adds an additional layer of insulation to the underside of the bath. This means that the warm bath temperature is retained for much longer. A long relaxing soak can be enjoyed with no need to top up with hot water, less wasteful and good for the environment.

### EXTRA SUPPORT

Every Beaufort bath comes with the highest specification support system available. This has been specifically designed to handle the extra weight of the Beauforté reinforced baths but is a standard feature across the whole Beaufort range. It has five adjustable legs for precision levelling and robust wall brackets to guarantee maximum rigidity. As a result, maximum rigidity is achieved with no movement from the bath and no problems with sealing.

### THE CHOICE OF THE PROFESSIONAL

Eastbrook has been selling baths for over 27 years. During this time, we have spoken to skilled installers every day and we understand that the professional bathroom fitter requires quality products that are easy and quick to install with no customer call backs. The Beauforté range is backed by a full 30-year guarantee against manufacturing faults. We are confident that you will find it's excellence and longevity unsurpassed in the market today.



# SPECIFICATION SHEET

**COLLECTION:** BOKX

**PRODUCT CODE:** AX-BOK-SFSP-CP



**DESCRIPTION:**

exposed square thermostatic 1/2" shower valve  
sirkel single function slide rail kit  
1/2" x 3/4" x 50mm eccentrics  
easy fit mounting brackets  
thermostatic cartridge S-701-31S  
flow cartridge H-202-RTC  
minimum operating pressure 1.0 bar

**FINISH:**

Chrome

**MINIMUM OPERATING PRESSURE:**

1.0 bar MP



tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories






# TECHNICAL DRAWING

COLLECTION: BOKX

PRODUCT CODE: AX-BOK-SFSP-CP


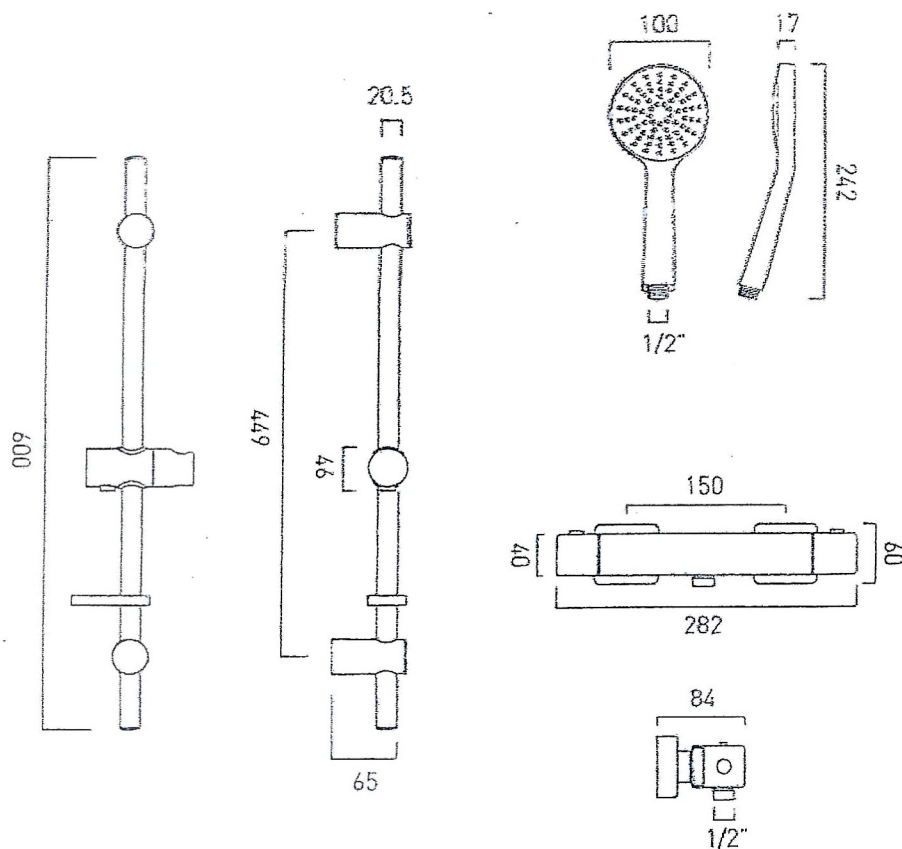


tel: 01934 744466  
email: sales@vado.com  
www.vado.com

**where inspiration flows**  
taps | showering | accessories






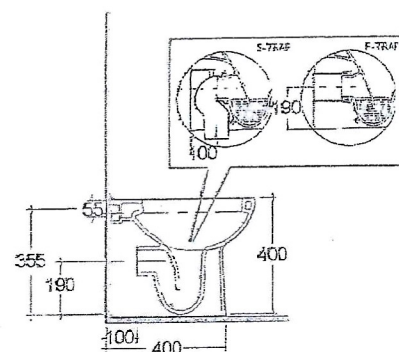

#### Technical specifications

Dimensions:	500 x 360 mm
Weight:	20 Kg
Color:	Alpine White
Trap type:	P Trap & S Trap
Trapway type:	Concealed
Seat cover options:	PP
Bowl shape:	Rounded Rectangle
Soft close:	yes
Suites:	<u>RAK-ORIGIN</u>



Code	Name
ORG17AWHA	ORIGIN WATER CLOSET BACK TO WALL P S-TRAP 50CM

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items:  $\pm 5\%$  for below 200mm and  $\pm 3\%$  for above 200mm; for all other items tolerance  $\pm 1\%$ . Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.

# Resort Mono Basin Tap

## Resort Mono Basin Tap Faucets

RAK  
CERAMICS

N/A

### Technical specifications


Dimensions:	None
Weight:	1.13 Kg
Color:	Chrome
Chrome thickness:	0.30
Cartridge:	Yes
Tail:	NA
Pressure:	3.00

Code	Name
RAK710111	Resort Mono Basin Tap

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items:  $\pm 5\%$  for below 200mm and  $\pm 3\%$  for above 200mm; for all other items tolerance  $\pm 1\%$ . Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.

Resort Bath Filler  
Resort Bath Filler Faucets

RAK  
CERAMICS

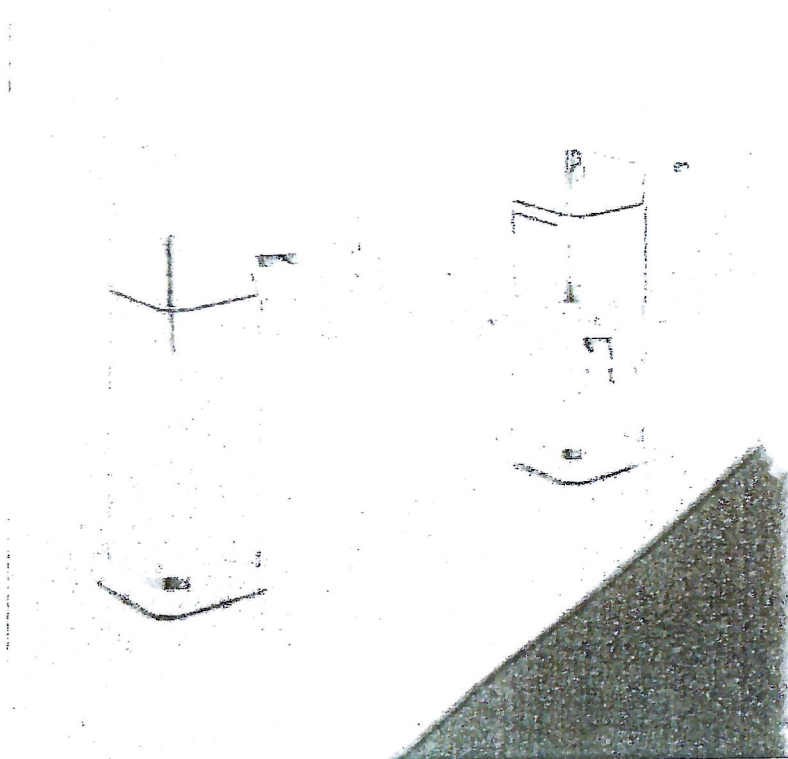

N/A

**Technical specifications**

Dimensions:	None
Weight:	2.38 Kg
Color:	Chrome
Chrome thickness:	0.30
Cartridge:	Yes
Tail:	NA
Pressure:	3.00

Code	Name
RAK710822	Resort Bath Filler

Dimensions: All dimensions in mm. Tolerance of vitreous china & fireclay items:  $\pm 5\%$  for below 200mm and  $\pm 3\%$  for above 200mm; for all other items tolerance  $\pm 1\%$ . Note: Due to a continuing development program to improve design and performance, the manufacturer reserves all rights to vary specifications without prior information. Please note accessories are for photographic use only.

# SPECIFICATION SHEET

**COLLECTION:** BOKX

**PRODUCT CODE:** AX-BOK-149T-RRK/B-CP



## DESCRIPTION:

square thermostatic shower valve with integrated diverter and easy-fit bracket  
rigid riser with single function shower head and handset  
thermostatic cartridge S-701-31S  
diverter cartridge SG-801-25/ZSX  
minimum operating pressure 1.0 bar

## FINISH:

Chrome


## MINIMUM OPERATING PRESSURE:

1.0 bar MP

## FLOW RATE AT 3.0 BAR FLOW PRESSURE:

Head: 9.8 l/m, Handset: 10.2 l/m

AX-BOK-149T-RRK-CP

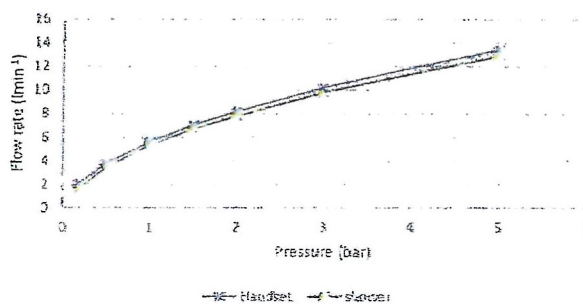

tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories






# TECHNICAL DRAWING

COLLECTOR: BOKX

PRODUCT CODE: AX-BOK-149T-RRK/B-CP

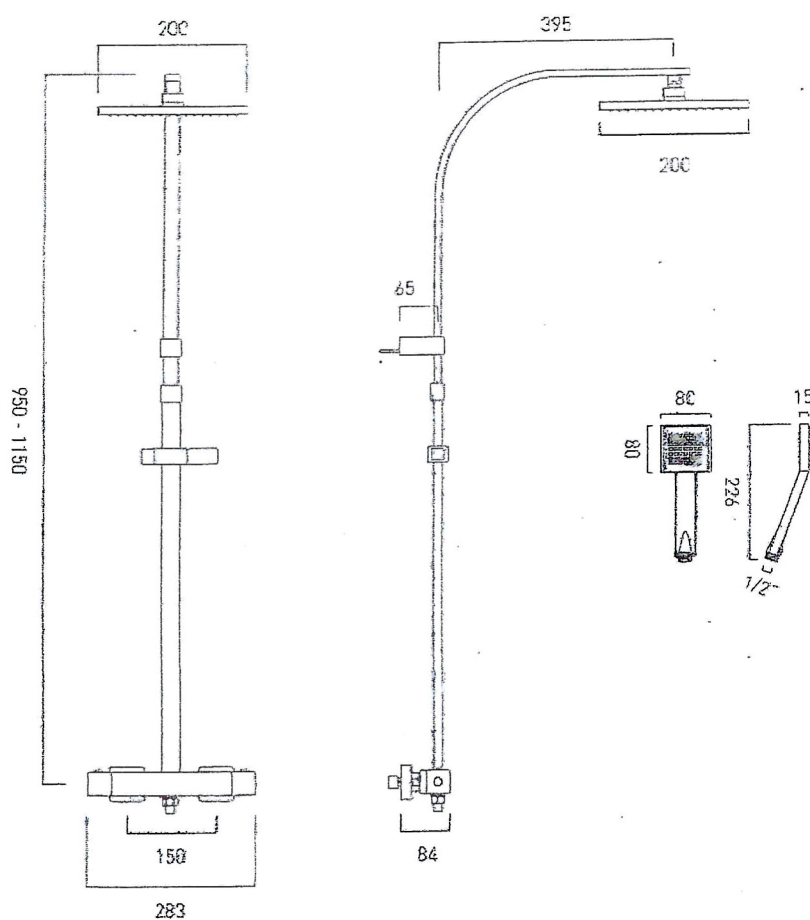

tel: 01934 744466  
email: sales@vado.com  
www.vado.com

**where inspiration flows**  
taps | showering | accessories






# SPECIFICATION SHEET

COLLECTION: WASTES

PRODUCT CODE: WG-395-C/P

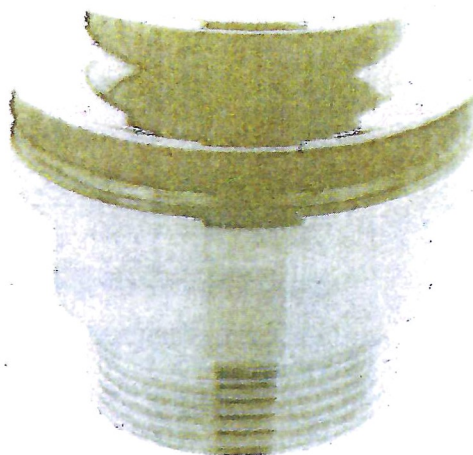

**DESCRIPTION:**

universal basin waste  
easily converts into a slotted or unslotted waste  
click-clac or free-flow

**FINISH:**

Chrome



tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories




# TECHNICAL

# DRAWING

COLLECTOR WASTES

PRODUCT CODE: WG-395-C/P

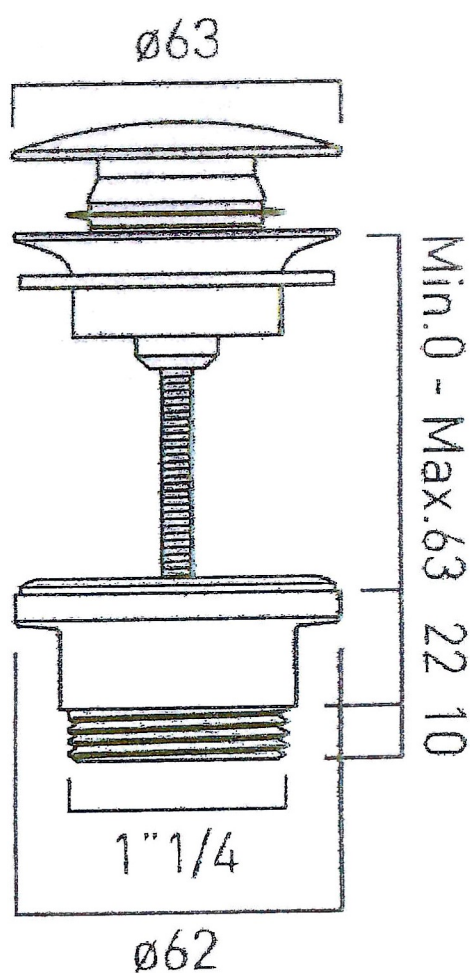

tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories



# SPECIFICATION SHEET

COLLECTION: OTHER

PRODUCT CODE: WG-71552A-CP



**DESCRIPTION:**

pop-up bath waste and overflow  
1.1/2" x 10mm threaded outlet connection  
min-max overflow bath thickness 1mm-11mm

**FINISH:**

Chrome



tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)


**where inspiration flows**  
taps | showering | accessories



# TECHNICAL DRAWING

COLLECTION: OTHER

PRODUCT CODE: WG-71552A-CP

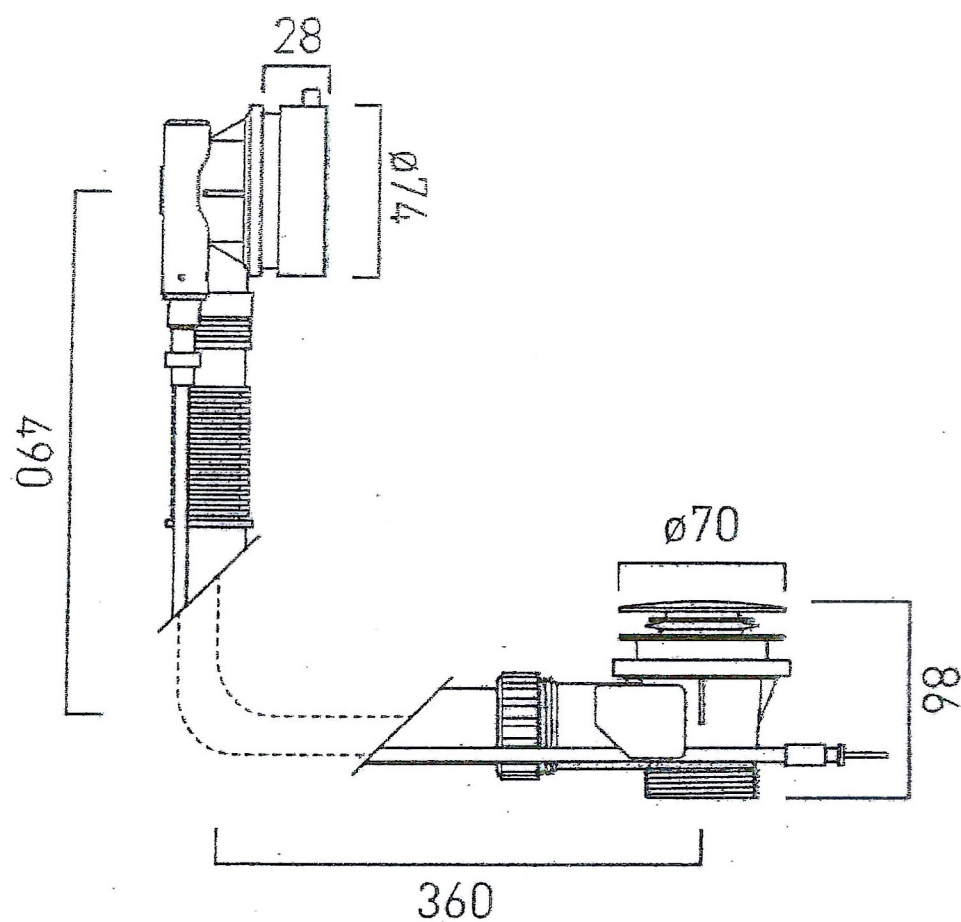


tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

**where inspiration flows**  
taps | showering | accessories



## TECHNICAL DATA SHEET

### IKOMA 550 VANITY UNIT\*

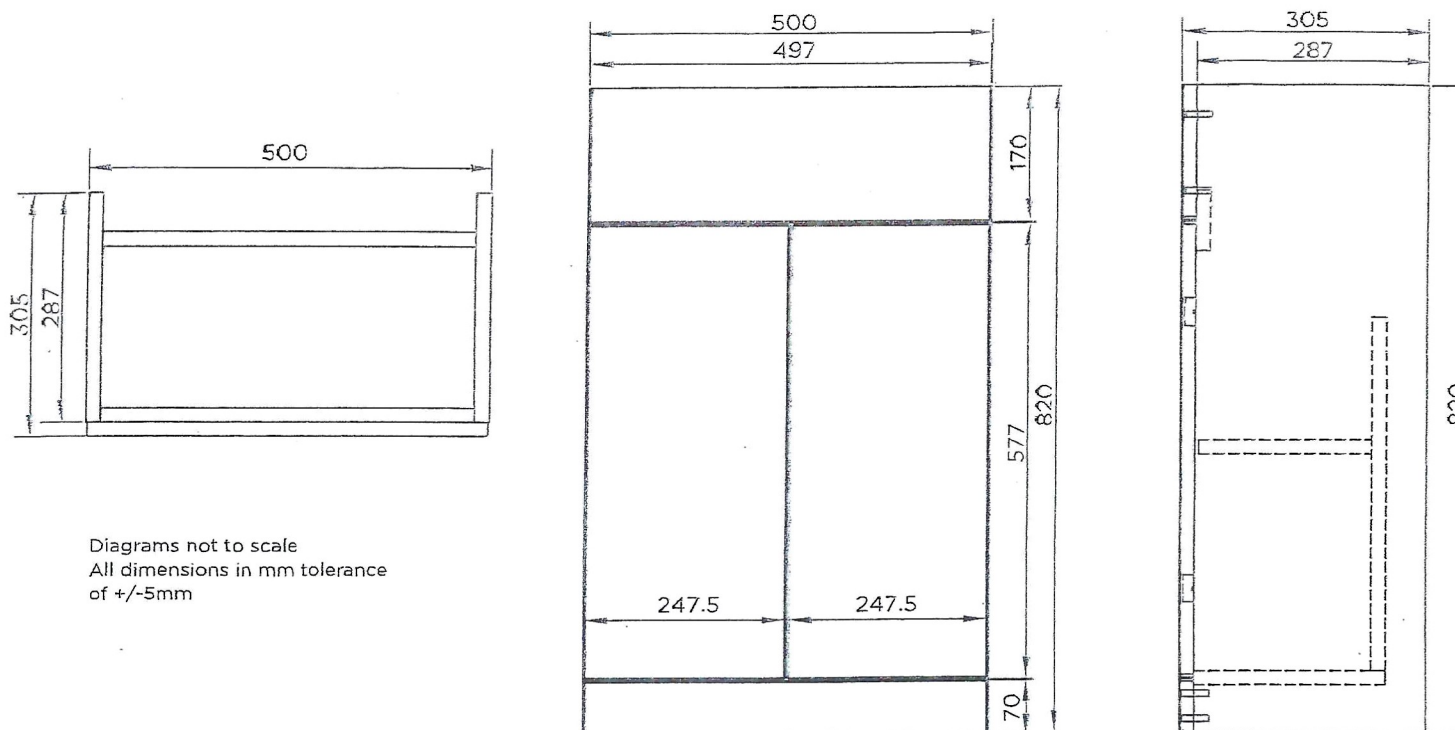

Diagrams not to scale  
All dimensions in mm tolerance  
of +/-5mm

\*Requires Basin: 806

<b>RANGE</b>	IKOMA
<b>PRODUCT TYPE</b>	VANITY UNIT
<b>CODE</b>	29431N/000 29431N/402 29431N/456 29431N/815
<b>DIMENSIONS (HxWxD)</b>	820 x 500 x 305mm
<b>MATERIAL CARCASS</b>	18mm MFC (Melamine Faced Chipboard)
<b>MATERIAL DOOR</b>	18mm MFC EDGED
<b>INTERNAL SHELF</b>	1 (Not Adjustable)
<b>BASIN REQUIRED</b>	806
<b>ASSEMBLED</b>	PREASSEMBLED
<b>INSTALLATION</b>	FLOOR STANDING
<b>PRODUCT WEIGHT</b>	18.1Kg
<b>GUARANTEE</b>	5 YEARS
<b>MANUFACTURE</b>	MANUFACTURED IN THE UK

\*\*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

\*\*\*Fixing point dimensions are for guidance only, the positions of wall fixing must be checked when product is received.




# Technical Data Sheet

Product Name: In Wall Cistern

Product Code: TR9009



By the way products

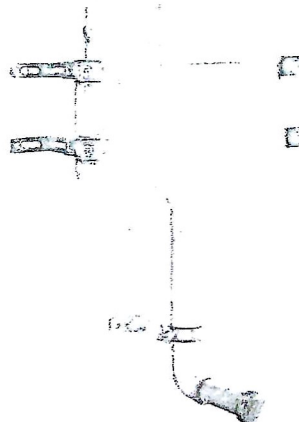

## Key Features

- ◀ ideal for fully tiled in installations
- ◀ all parts serviceable through flush plate aperture
- ◀ selection of flush plates available separately
- ◀ 3/6 litre flush
- ◀ 0.2 - 10 bar working pressure range
- ◀ pneumatic flush valve
- ◀ side entry inlet valve (1/2" BSP)
- ◀ top & front access
- ◀ 90° flush pipe
- ◀ flush pipe securing bracket
- ◀ polystyrene insulation jacket

## Dimensions

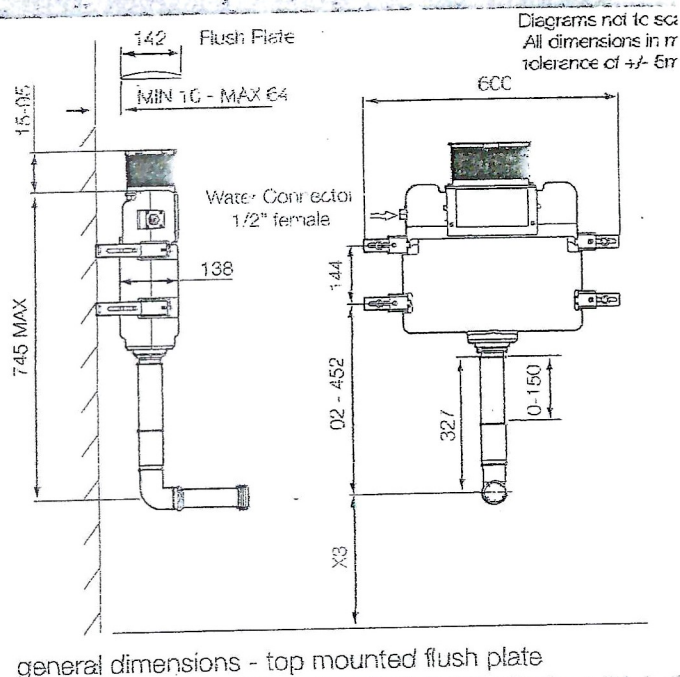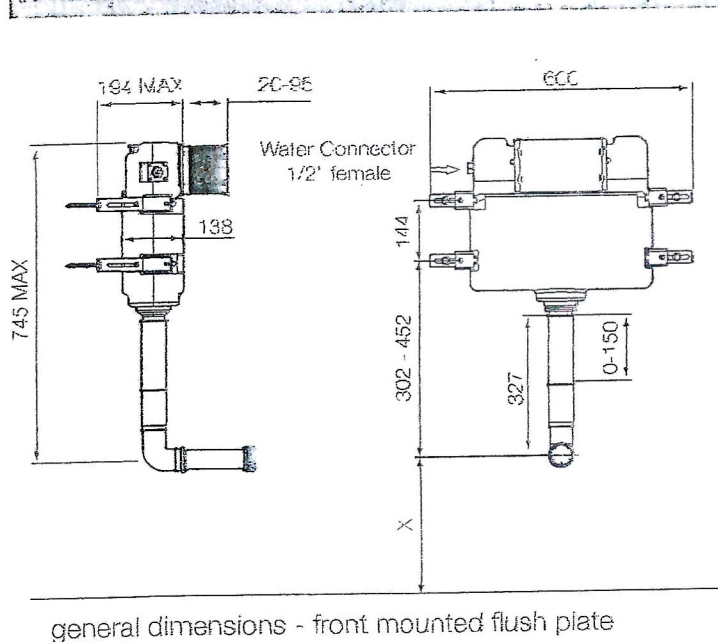

Diagrams not to scale  
All dimensions in mm  
tolerance of  $\pm 5$ mm

## FAQ's

What is the height of the flush inlet pipe to the pan? 327mm - the pipe can be cut down for different inlet locations

What is the vertical length of the flush pipe to the tank? 177mm to 327mm.

Can I use a flush button rather than a flush plate with this cistern?

Yes, this type of installation is possible, but you must make provision for maintenance of the cistern in lieu of the flush plate.

What depth of void will the tank fit into?

The cistern will fit into a void of 138-194mm. If a deeper void is required, the tank can be mounted on battens.

What thickness of cladding can be used?

Minimum of 20mm - Maximum 95mm for the adjustable flush plate mounting.

# Our Guarantee

All VADO products come with a 2 year guarantee as standard. Within this guarantee period VADO will provide replacement parts and any labour [SEE NOTE 1, GUARANTEE CONDITIONS] needed to complete the product repair.

This standard guarantee may be extended by registering your product to give up to a 15 year guarantee period. Once registered:

Booth & Co. chrome and nickel brassware products have a 15 year guarantee (2 years parts and labour plus 13 years parts only).

VADO chromed brassware and stainless steel products have a 15 year guarantee (2 years parts and labour plus 13 years parts only).

Brassware products from the Individual by VADO collection have a 15 year guarantee (2 years parts and labour plus 13 years parts only).

VADO Sensori SmartTouch and SmartDial products have a 5 year guarantee (parts and labour).

VADO Identity and i-tech products have a 5 year guarantee (2 year parts and labour plus 3 years parts only).

Axces by VADO products have a 10 year guarantee (2 years parts and labour plus 8 years parts only). Axces by VADO electric showers have a 2 years parts and labour guarantee. Operational components such as, but not limited to; thermostatic cartridges, diverters, headworks and flow control, waste mechanisms, shower hoses, O-rings and seals are guaranteed for 2 years parts and labour plus 3 years on parts supply only.

All other VADO products have a 3 year guarantee (2 years parts and labour plus 1 year parts only) [SEE NOTE 2, GUARANTEE CONDITIONS].



We use cookies on this site to enhance your user experience

By clicking any link on this page you are giving your consent for us to set cookies. [More info](#)

OK, I agree

Decline

VADO chrome products have a 15 year guarantee



Individual by VADO products have a 15 year guarantee



VADO digital products have a 5 year guarantee.

## Guarantee Conditions

Our products are guaranteed against manufacturing defects from the date of purchase until the expiry of the relevant guarantee period shown above.

The guarantee is only valid if:

1. The product has been installed, used and maintained (maintenance guidelines can be viewed here) in accordance with VADO's instructions and subjected to normal use only.
2. The defect is not due to use of an unsuitable or inadequate water or power supply.
3. The defect is not due to accident, misuse, neglect or incorrect/inappropriate repair (other than by VADO or VADO authorised agents) or damage caused by foreign objects or substances.
4. The extended guarantee is only available if you have completed the Guarantee Registration Process. This can be done via the VADO website or via phone to our aftersales team. Registration must be completed within 6 months from date of purchase.

Under the extended guarantee period VADO will, at its option, offer to supply any replacement product (or component part) assessed to be defective [SEE NOTE 3].

The guarantee (whether standard or extended) is non-transferable to any subsequent owner.

We use cookies on this site to enhance your user experience

OK, I agree

Decline

By clicking any link on this page you are giving your consent for us to set cookies. [More Info](#)



All claims under the guarantee should be notified in the first instance to our Aftersales department, contact details below, this must be done no later than the last day of the relevant guarantee period. All claims must be accompanied by proof of purchase (sales receipt or delivery note) from an official VADO dealer.

The guarantee does not extend to any consequential loss or damage.

After repair or replacement, the relevant guarantee period will be calculated from the original date of purchase.

VADO operates a policy of continuous product development and therefore reserves the right to change the product, packaging and documentation specifications without notice.

#### NOTES:

[1] Labour via our engineer network is only available in the UK. Attendance by a VADO engineer or sub-contract engineer will be under our standard terms and conditions.

[2] VADO spare parts and shower hoses are under a parts only guarantee.

[3] VADO reserves the right to charge in advance for a product (or replacement part) pending collection and investigation (at VADO expense) to confirm a defect is due to a manufacturing issue. If a defect is found the charge will be refunded or cancelled.

This guarantee is in addition to and does not affect your statutory rights as a consumer.

Tel: 01934 745163

Email: [aftersales@vado.com](mailto:aftersales@vado.com)

We use cookies on this site to enhance your user experience

OK, I agree **Decline**

By clicking any link on this page you are giving your consent for us to set cookies. [More info](#)

# THE VADO GUARANTEE

