


Prism MS52P48 PoE Managed Switch

52 埠 L3 高速乙太網路 PoE 交換器

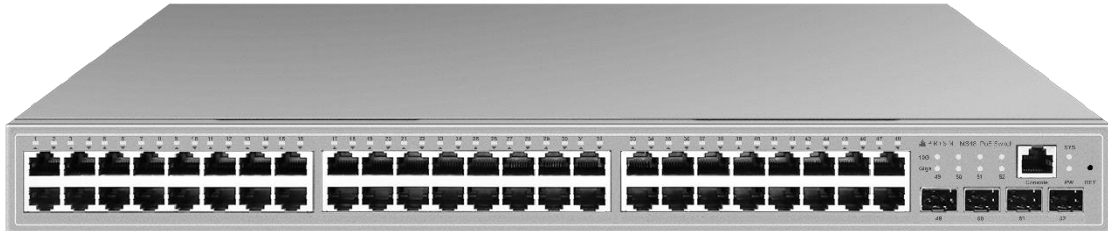

Prism MS52P48 完整規格表

硬體規格

Port	48 *10/100/1000Base-TX port 4 *10G SFP+
PoE Standards	Port 1~4: IEEE802.3af/at/PoE++/bt Port 5~48: IEEE802.3af/at
設定埠	1 個
重設鈕	1 個
頻寬	512Gbps
數據包轉發	184.64Mpps
緩衝	1.5M
運作溫度	-20°C~55°C
儲存溫度	-40°C~75°C
運作濕度	5%~90% 非集中
儲存濕度	5%~95% 非集中
尺寸	440*290*45mm
重量	4.2kg
電源輸入	AC 100~240V 50~60Hz
功耗	≤ 600W



寶力科技服務有限公司
BAOLI TECHNOLOGY SERVICE LTD

電話:02-77035366

軟體規格

協定	IEEE 802.3x IEEE 802.3、IEEE 802.3u、IEEE 802.3ab、IEEE 802.3z IEEE 802.3ad IEEE 802.3q、IEEE 802.3q/p IEEE 802.1w、IEEE 802.1d、IEEE 802.1S
MAC 位址	16K MAC addresses; MAC address learning and aging
VLAN	4k VLANS ; Port-based VLANS ; 802.1Q VLAN
Spanning Tree	STP (Spanning Tree Protocol) RSTP/MSTP (Rapid Spanning Tree Protocol) ERPS ring network protocol EAPS ring network protocol 802.1x argumentation agreement
流量監控	多對一監控
管理	Central management by PrismX ■ Auto Discover by PrismX ■ Port Status Display ■ Each Port On/Off ■ Port VLAN Setting ■ IP address Setting ■ Device Name ■ Power Budge Status ■ Reboot ■ Factory default

